



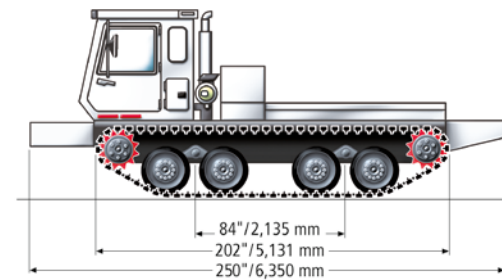

## PowerBully 5T Payloads up to 16,000 lbs

**PowerBully means dependability** and the PB 5T is the track carrier for quick transport to your job site. With the Cummins engine, reinforced chassis and a digger derrick, the versatile PowerBully 5T can make swift work of power pole replacement.

- ⊕ Legal width for ease of transport
- ⊕ Hydrostatic transmission
- ⊕ Low ground pressure
- ⊕ Urethane track options



### Engine

Type	Cummins QSB 6.7 turbo diesel
No. of cylinders	6
Displacement	6.7 l / 1.8 gal 6,700 ccm / 408 cu.in
Power output (ECE)	191 kW / 260 hp
Exhaust emissions standard	TIER 3
Max. torque	728 Nm at 1,500 rpm
Tank capacity	190 l / 50 gal
Cooling system	23 l / 6 gal
Hydrostatic tank	378 l / 100 gal

### Driving characteristics

Speed	0 – 8 km/h / 0 – 5 mph	
Fording depth	1,060 mm / 42"	
Turning radius	0°	
Ground pressure	No penetration	6" penetration / 152 mm
	Standard vehicle	2.4 psi    2.05 psi
	Loaded vehicle	4.77 psi    3.52 psi
Max. grade ability		
	Uphill/downhill	60%    31°
	Side hill	40%    22°

### Electrics

Low-voltage system	12 V
Alternator	130 A
Batteries	2 x 1,100 cca

### Transmission

Pump drive	Durst
Hydrostatic control	Sauer Danfoss independent control of each track
Torque hub	Fairfield
Steering control	Dual stick w/ low & high range Single stick (optional)

### Chassis

Type	Tub; access panels & drain plug
Suspension	Walking beam
Wheels	8 solid rubber, 6.5 x 16

### Tracks

Type	2 belt w/ steel crosslinks
Belting	Rubber, 5 ply
Width	838 mm / 33"
Tensioner	Grease filled cylinder

### Weights

Tare weight* (basic vehicle)	from 8,430 kg / 18,580 lbs
Gross weight limit	15,685 kg / 34,580 lbs
Payload on platform	7,260 kg / 16,000 lbs
*In acc. with ISO 1176/M6, net weights may vary depending on equipment.	

### Dimensions

Overall width	2,591 mm / 102"	
Overall height	2,440 mm / 96"	
Ground clearance	457 mm / 18"	
Overall length standard	6,350 mm / 250"	
Suggested garage dimensions	Length	9,400 mm / 370"
	Width	4,880 mm / 192"
	Height	3,200 mm / 126"

### Options

One person or two person cab
Heavy duty brush guards
Rear pintle hook
Air conditioning
Arctic package
Spotlight-remote control
Winch
Blade
Rear view camera
Amber beacon light
Electronic inclinometer
3rd battery
Hi flow hydraulics: for drills, cranes, knuckle booms, man lifts, digger derricks, backhoes