



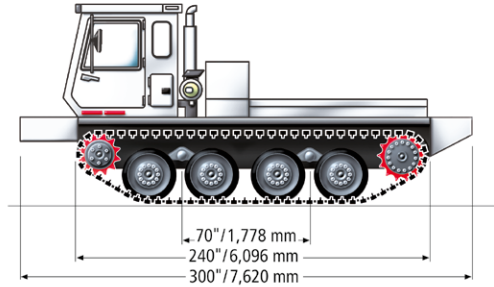

PowerBully 10T Payloads up to 25,000 lbs

PowerBully means flexibility and the PowerBully 10T is the track carrier platform for your unique application. As a preferred track vehicles for fire fighting, this model can be built to carry a 750 gallon water tank, or reinforced to pull fire plows, all to provide you with an effective and efficient way to fight remote fires.

- ⊕ Customized vehicles for special applications
- ⊕ Specialized firefighting vehicle
- ⊕ Specialized fabrication options
- ⊕ Mechanical drive availability



Engine

Type	Cummins QSB 6.7 turbo diesel	
No. of cylinders	6	
Displacement	6.7 l / 1.8 gal	6,700 ccm / 408 cu.in
Power output (ECE)	191 kW / 260 hp	
Exhaust emissions standard	TIER 3	
Max. torque	990 Nm at 1,500 rpm	
Tank capacity	300 l / 80 gal	
Cooling system	23 l / 6 gal	
Hydrostatic tank	435 l / 115 gal	

Driving characteristics

Speed	0 – 10 km/h / 0 – 6.5 mph	
Fording depth	1,060 mm / 42"	
Turning radius	on-the-spot	
Ground pressure	No penetration	6" penetration / 150 mm
Standard vehicle	2.4 psi	1.75 psi
Loaded vehicle	4.84 psi	4.16 psi
Max. grade ability		
Uphill/downhill	60 %	31 °
Side hill	40 %	22 °

Electrics

Low-voltage system	12 V
Alternator	130 A
Batteries	2 x 1,100 cca

Transmission

Pump drive	Durst
Hydrostatic	Sauer Danfoss independent control of each track
Steering control	Dual stick w/low & high range
Mechanical transmission	optional

Chassis

Type	Tub; access panels & drain plug	
Suspension	Walking beam	
Wheels	8 solid rubber, 6.5 x 16	

Tracks

Type	2 belt w/steel crosslinks
Belting	Rubber, 6 ply
Width	1,016 mm / 40"
Tensioner	Grease filled cylinder

Weights

Tare weight* (basic vehicle)	from 9,980 kg / 22,000 lbs
Gross weight limit	19,050 kg / 42,000 lbs
Payload on platform	11,300 kg / 25,000 lbs

*In acc. with ISO 1176/M6, net weights may vary depending on equipment.

Dimensions

Overall width		3,226 mm / 127"
Overall height		2,896 mm / 114"
Ground clearance		444.5 mm / 17.5"
Overall length standard		7,620 mm / 300"
Suggested garage dimensions	Length	10,670 mm / 420"
	Width	5,720 mm / 225"
	Height	3,660 mm / 144"

Options

One person or two person cab
Heavy duty brush guards
Rear pintle hook
Air conditioning
Arctic package
Spotlight-remote control
Winch
Rear view camera
Amber beacon light
Electronic inclinometer
3rd battery
Hi flow hydraulics: for drills, cranes, knuckle booms, man lifts, digger derricks, backhoes