

# TECHNICAL SPECIFICATION

(from series 2020 on)




# BeachTech 2500

## Data sheet

Cleaning method		BeachTech 2500
	patented	raking-screening-mixed technique
Tractor requirements		
	minimum power output	59 kW / 80 HP till 74 kW / 100 HP (depending on nature of the ground)
	4-wheel-drive	
	differential lock	
	high flotation tires, width	480 mm front, 520 mm back
	2-point hitch, cat. 2	
	PTO shaft	6 spline, 1 3/8"
	power take-off AR NORM	540 (1000 possible) rpm
	1 double-acting circuit of the additional tractor hydraulics in standard operation	
	electrical circuit	standardized socket, 12 V
Dimensions		
Length	in transportation	5,600 mm
	incl. finisher	6,060 mm
Width	vehicle	2,500 mm
	working width	2,500 mm
Height	vehicle	2,250 mm
	unloading hopper/discharge	2,750 mm
Tires		
		520/50-17
Weight		
	net weight	2.790 kg
	gross weight limit up to*	4.000 kg
Tank content		
	hydraulic oil	30 l
Performance		
	area coverage up to	30.000 m <sup>2</sup> /h
Working depth		
	up to**	30 cm
Capacity		
	collecting hopper	2,80 m <sup>3</sup>
Speed		
	max. operating speed**	12 km/h
	road traffic*	25/40 km/h

\*in accordance with country-specific road traffic legislation

\*\*depending on nature of the ground

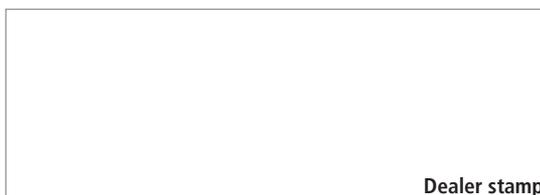

Dealer stamp

**BeachTech®**

Tel.: +49 7392 900 - 461  
 Email: info@beach-tech.com  
 www.beach-tech.com

The possibility of changes to the product after the editorial closing date for this publication cannot be ruled out.