

TECHNICAL SPECIFICATION

(from series 2020 on)




BeachTech 5500

Data sheet

Cleaning method		BeachTech 5500
		Screening technique with vibrating sieve plate and transport system module
Engine		
	Type	Deutz
	Number of cylinders	4
	Intake system	Turbocharger
	Power output	55 kW/74 hp @ 2.400 rpm
	Capacity	2.925 cm ³
	Exhaust emission standards	EU Stage III A; EPA Tier 4 i
Drive		
		hydrostatic all-wheel drive with 3-tires design
Dimensions		
Length Width		5.525 mm
	with standard tires (wide tires)	2.450 mm
Height	Working width	1.524 mm
	Finisher	2.800 mm
	Vehicle (rotating beacon)	2.420 mm
Turning radius	Unloading collecting hopper	0 bis 2.600 mm
		on the spot
Tires		
	Wide, low pressure	500/50 x 17
Weight		
	Weight	4.550 kg
	Gross weight limit up to*	5.600 kg
Tank capacity		
	Diesel	80 l
	Hydraulic oil	75 l
Sound power		
at 2600 rpm	according to ISO 4254-1:2008	Driver's seat 91 db(A)
Performance		
	Ground coverage up to	17.000 m ² /h
Working depth		
	up to**	15 cm
Capacity		
	Collecting hopper	1,5 m ³
Speed		
	Max. driving speed**	15 km/h
	Traffic*	15 km/h

* according to local traffic regulations

** depending on nature of the ground

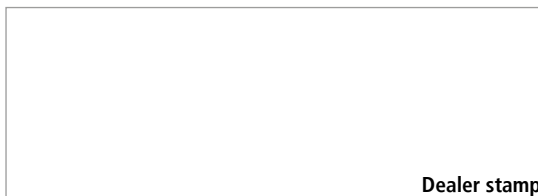

Dealer stamp

BeachTech

Tel.: +49 7392 900 - 461
Email: info@beach-tech.com
www.beach-tech.com

The possibility of changes to the product after the editorial closing date for this publication cannot be ruled out.