

TWO-POST LIFT MODEL: PK18E

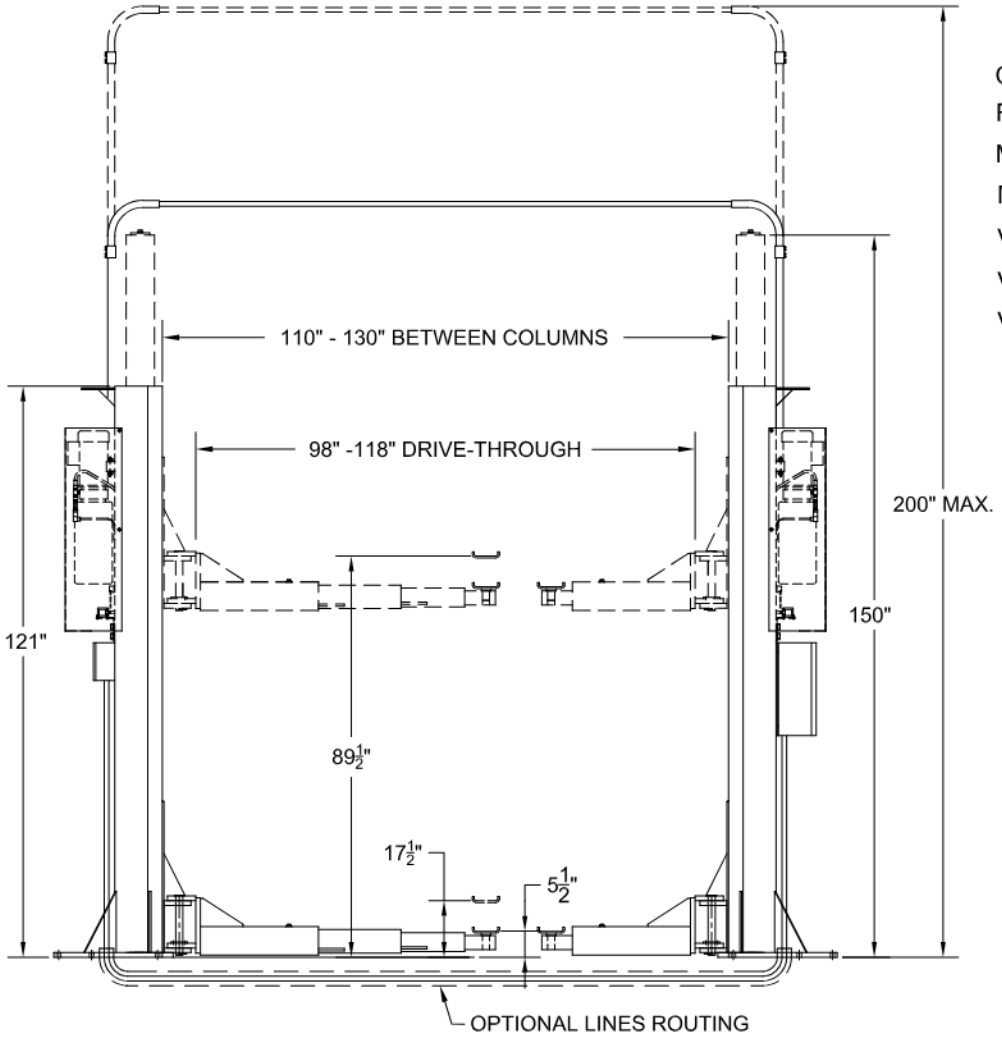

CAPACITY:.....18,000 LBS
RISE:.....89 -1/2"
MINIMUM CEILING HEIGHT REQ'D:....160"
MOTORS (2):..... 2 HP
VOLTAGE OPTION 1:..... 208-230V/1PH
VOLTAGE OPTION 2:..... 230-460V/3PH
VOLTAGE OPTION 3:..... 575V/3PH

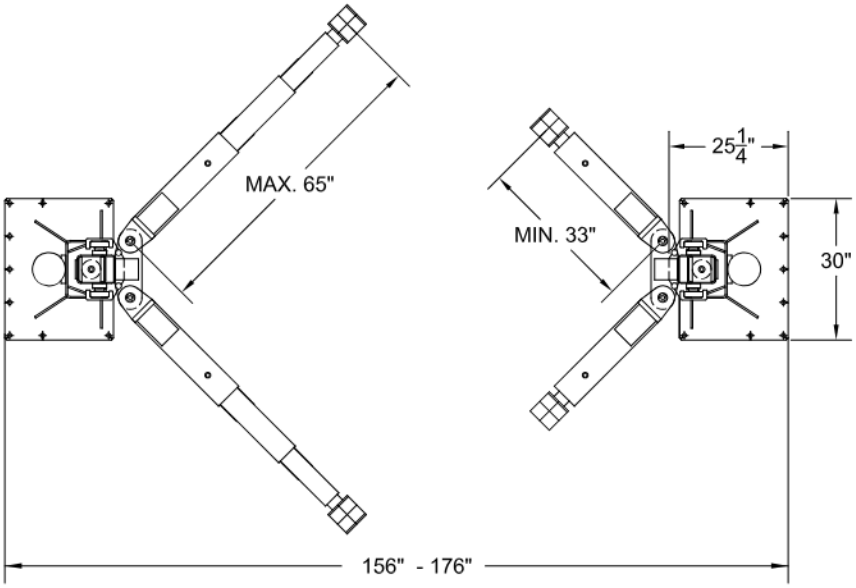


FEATURES:


1. ELECTRONICALLY CONTROLLED
2. CLEAR FLOOR FOR EASY ACCESS
3. NO OVERHEAD BEAM
4. NO EQUALIZING CABLES
5. LOW PROFILE ARMS
6. GEARED ARM RESTRAIN WITH SINGLE POINT LOCK AND RELEASE.
7. THREE STAGE ARMS
8. COMES WITH A SET OF HEIGHT ADAPTERS (3", 6" AND 9")
9. OPTIONAL POWER-ASSISTED ARM EXTENSION AVAILABLE

DWN. JK / APPR. KK	PKS	DATE MAY 01/2017	DWG PK18E-SPEC-1	A

TWO-POST LIFT MODEL: PK20E

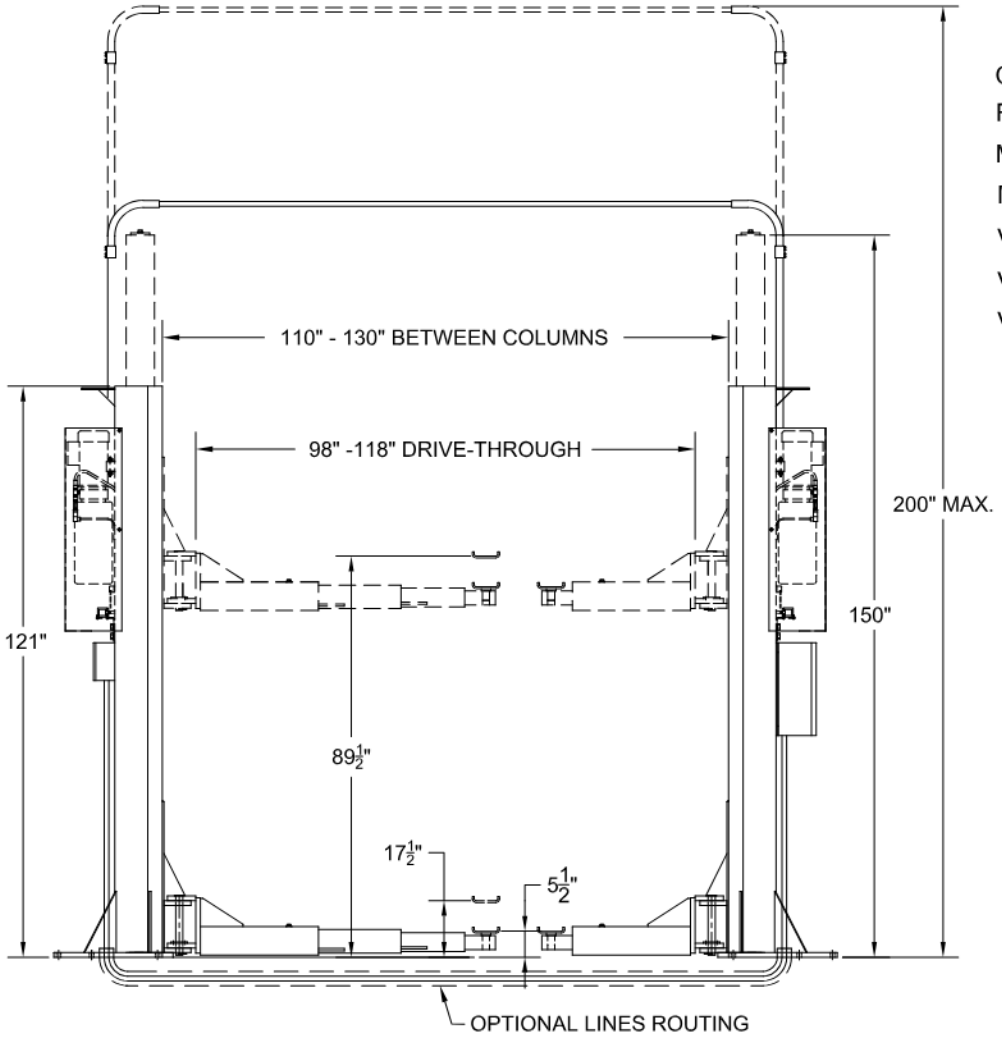

CAPACITY:.....20,000 LBS
RISE:.....89 -1/2"
MINIMUM CEILING HEIGHT REQ'D:....160"
MOTORS (2):..... 2 HP
VOLTAGE OPTION 1:..... 208-230V/1PH
VOLTAGE OPTION 2:..... 230-460V/3PH
VOLTAGE OPTION 3:..... 575V/3PH

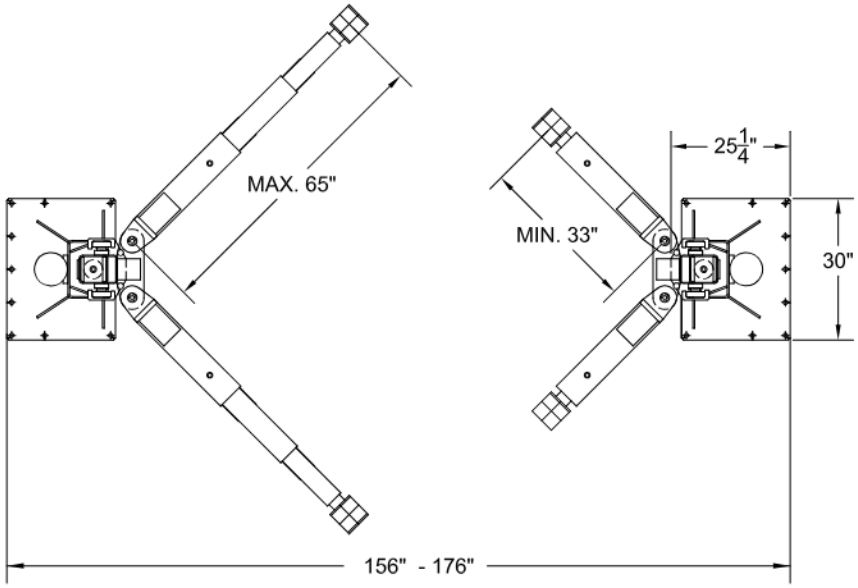


FEATURES:


1. ELECTRONICALLY CONTROLLED
2. CLEAR FLOOR FOR EASY ACCESS
3. NO OVERHEAD BEAM
4. NO EQUALIZING CABLES
5. LOW PROFILE ARMS
6. GEARED ARM RESTRAIN WITH SINGLE POINT LOCK AND RELEASE.
7. THREE STAGE ARMS
8. COMES WITH A SET OF HEIGHT ADAPTERS (3", 6" AND 9")
9. OPTIONAL POWER-ASSISTED ARM EXTENSION AVAILABLE

DWN. JK / APPR. KK	PKS	DATE MAY 01/2017	DWG PK20E-SPEC-1	A

TWO-POST LIFT MODEL: PK22E

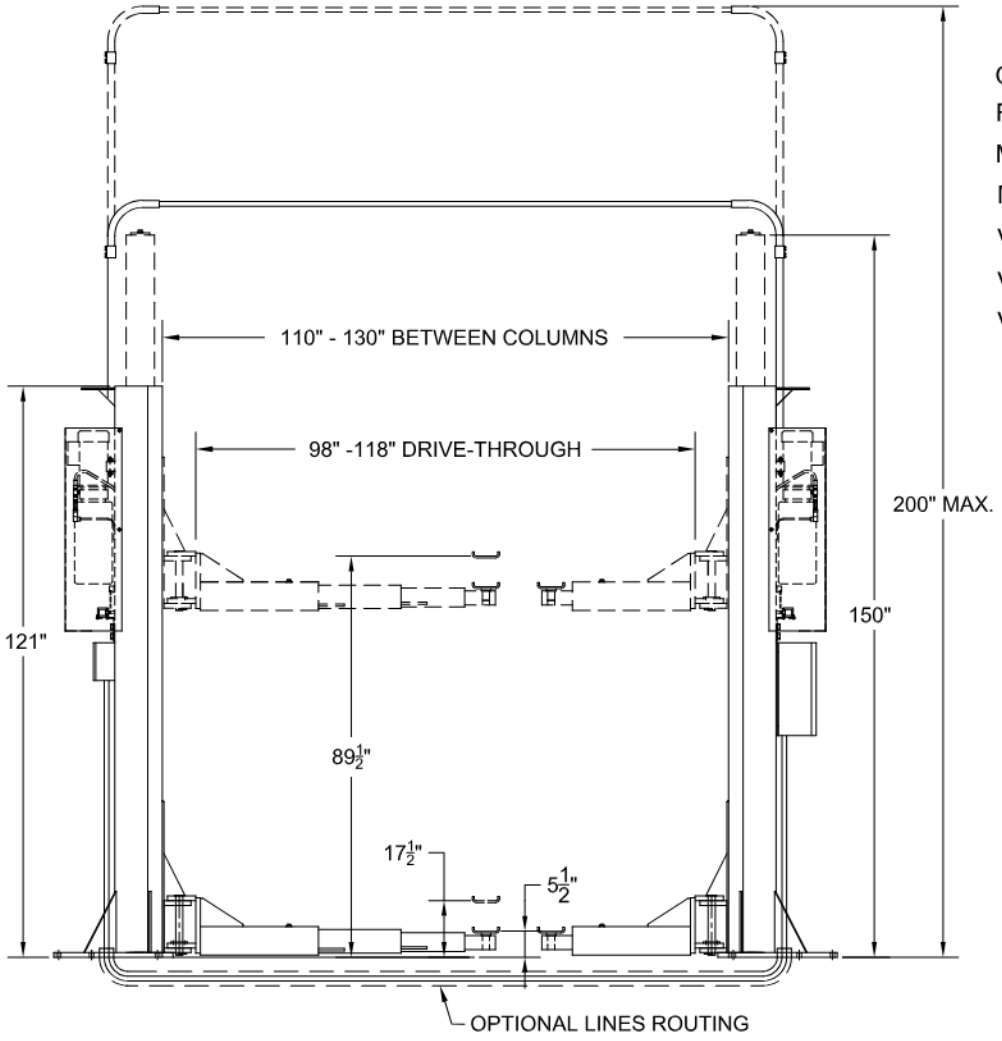

CAPACITY:.....22,000 LBS
RISE:.....89 -1/2"
MINIMUM CEILING HEIGHT REQ'D:....160"
MOTORS (2):..... 2 HP
VOLTAGE OPTION 1:..... 208-230V/1PH
VOLTAGE OPTION 2:..... 230-460V/3PH
VOLTAGE OPTION 3:..... 575V/3PH

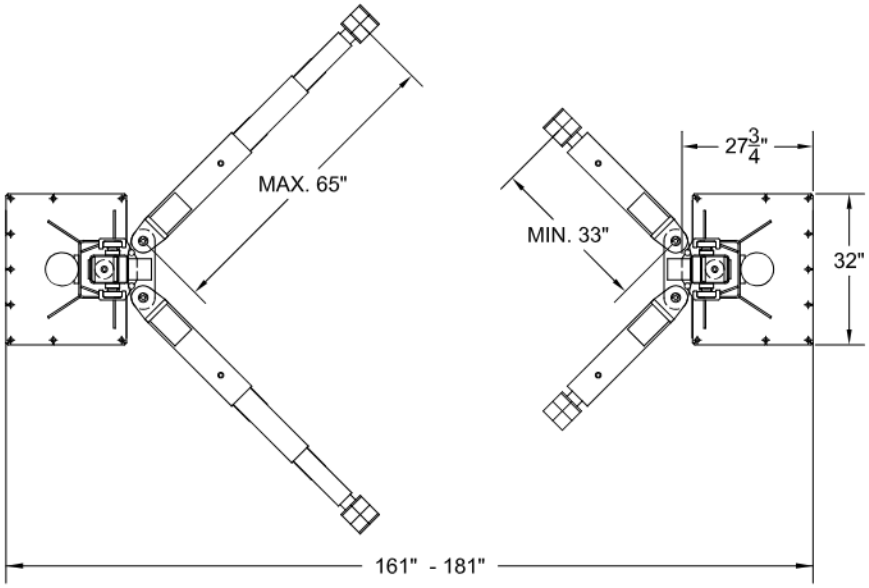


FEATURES:


1. ELECTRONICALLY CONTROLLED
2. CLEAR FLOOR FOR EASY ACCESS
3. NO OVERHEAD BEAM
4. NO EQUALIZING CABLES
5. LOW PROFILE ARMS
6. GEARED ARM RESTRAIN WITH SINGLE POINT LOCK AND RELEASE.
7. THREE STAGE ARMS
8. COMES WITH A SET OF HEIGHT ADAPTERS (3", 6" AND 9")
9. OPTIONAL POWER-ASSISTED ARM EXTENSION AVAILABLE

DWN. JK / APPR. KK	PKS	DATE MAY 01/2017	DWG PK22E-SPEC-1	A

TWO-POST LIFT MODEL: PK24E

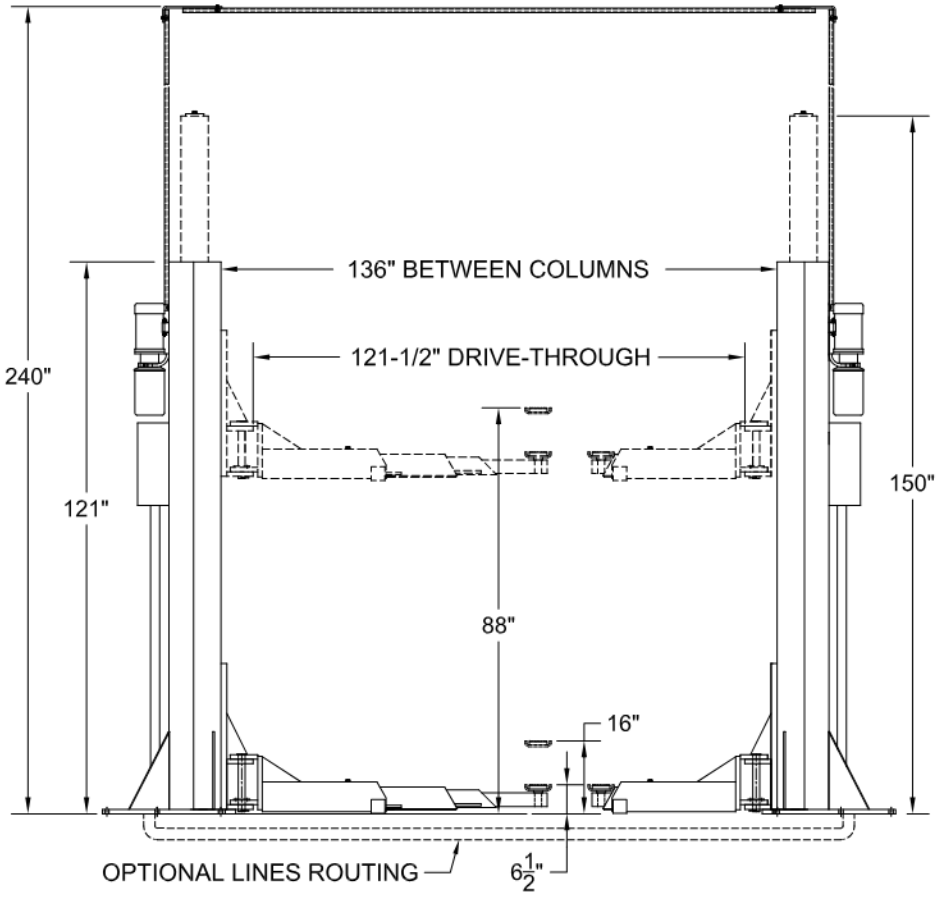

CAPACITY:.....24,000 LBS
RISE:..... 88"
MINIMUM CEILING HEIGHT REQ'D:....160"
MOTORS (2):..... 3 HP
VOLTAGE OPTION 1:..... 208-230V/1PH
VOLTAGE OPTION 2:..... 230-460V/3PH
VOLTAGE OPTION 3:..... 575V/3PH

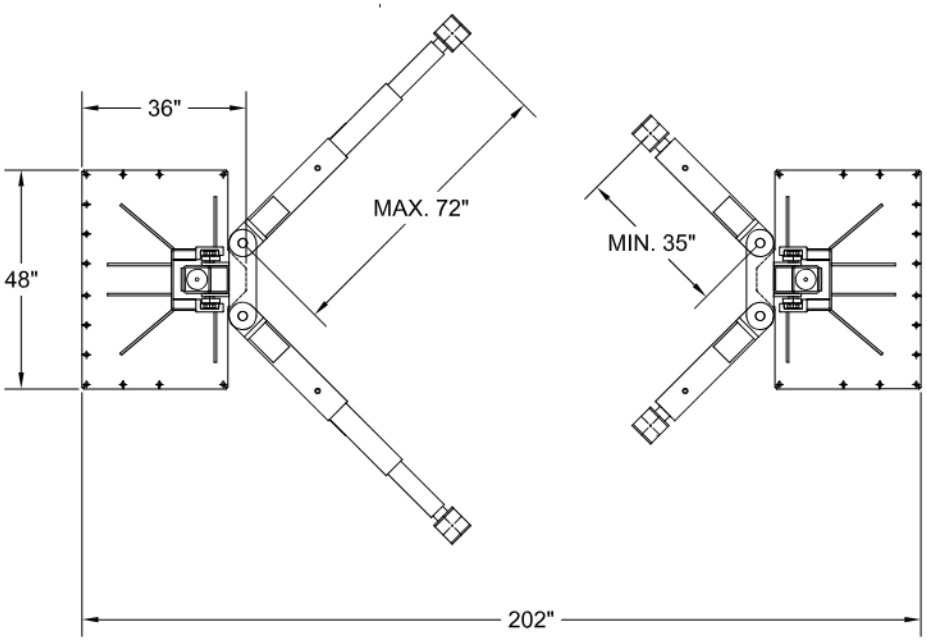


FEATURES:


1. ELECTRONICALLY CONTROLLED
2. CLEAR FLOOR FOR EASY ACCESS
3. NO OVERHEAD BEAM
4. NO EQUALIZING CABLES
5. LOW PROFILE ARMS
6. GEARED ARM RESTRAIN WITH SINGLE POINT LOCK AND RELEASE.
7. THREE STAGE ARMS
8. COMES WITH A SET OF HEIGHT ADAPTERS (3", 6" AND 9")
9. OPTIONAL POWER-ASSISTED ARM EXTENSION AVAILABLE

DWN. JK / APPR. KK	P K S	DATE MAY 01/2017	DWG PK24E-SPEC-01	A

TWO-POST LIFT MODEL: PK26E

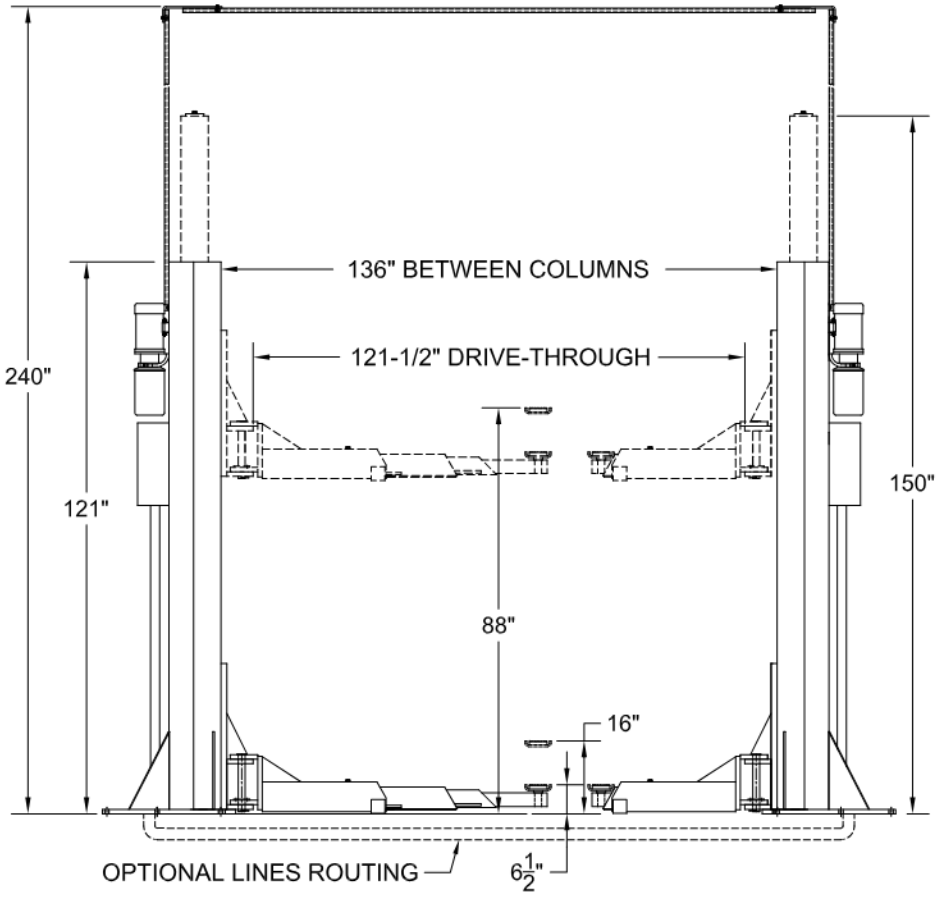

CAPACITY:.....26,000 LBS
RISE:..... 88"
MINIMUM CEILING HEIGHT REQ'D:....160"
MOTORS (2):..... 3 HP
VOLTAGE OPTION 1:..... 208-230V/1PH
VOLTAGE OPTION 2:..... 230-460V/3PH
VOLTAGE OPTION 3:..... 575V/3PH

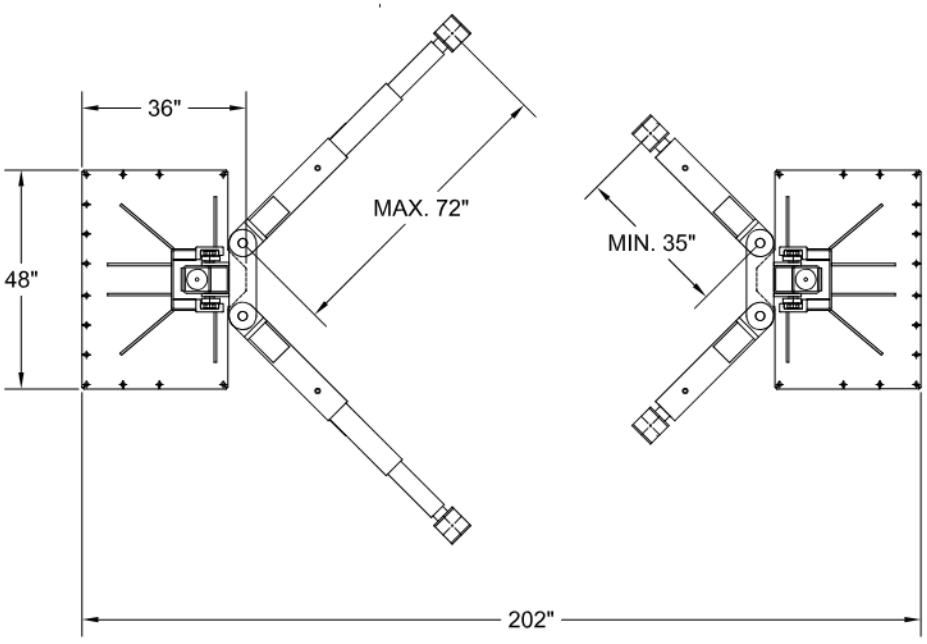


FEATURES:


1. ELECTRONICALLY CONTROLLED
2. CLEAR FLOOR FOR EASY ACCESS
3. NO OVERHEAD BEAM
4. NO EQUALIZING CABLES
5. LOW PROFILE ARMS
6. GEARED ARM RESTRAIN WITH SINGLE POINT LOCK AND RELEASE.
7. THREE STAGE ARMS
8. COMES WITH A SET OF HEIGHT ADAPTERS (3", 6" AND 9")
9. OPTIONAL POWER-ASSISTED ARM EXTENSION AVAILABLE

DWN. JK / APPR. KK	P K S	DATE MAY 01/2017	DWG PK26E-SPEC-01	A

TWO-POST LIFT MODEL: PK28E

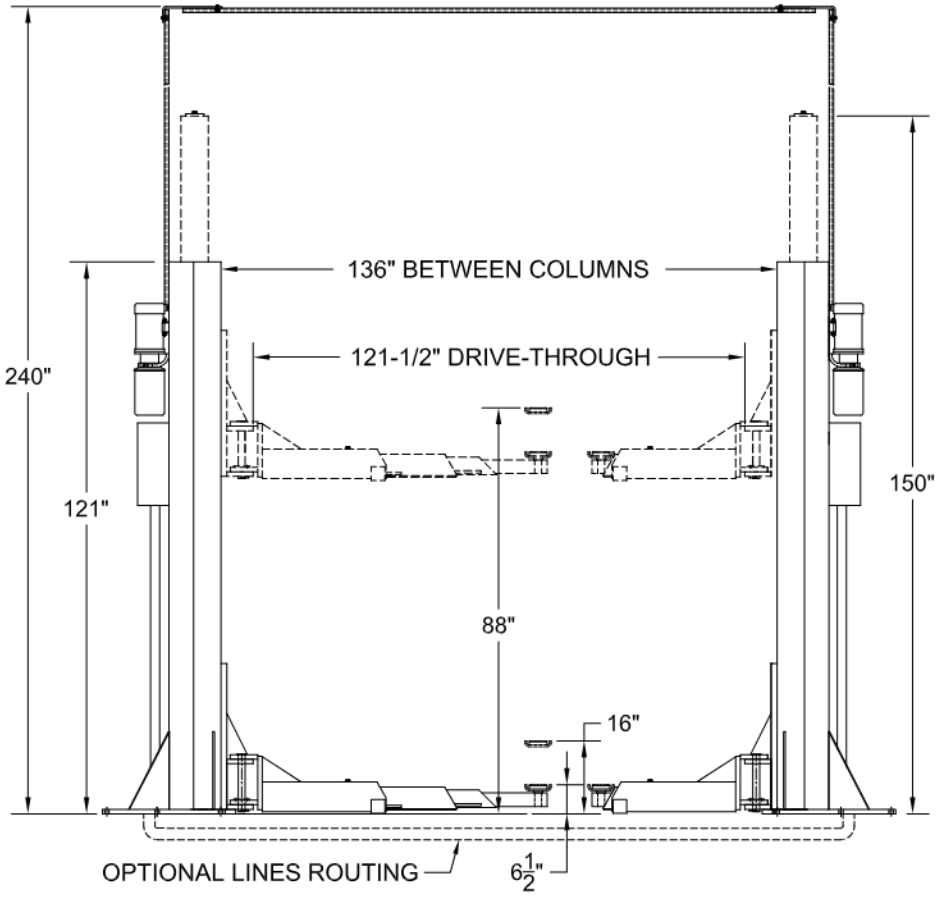

CAPACITY:.....28,000 LBS
RISE:..... 88"
MINIMUM CEILING HEIGHT REQ'D:....160"
MOTORS (2):..... 3 HP
VOLTAGE OPTION 1:..... 208-230V/1PH
VOLTAGE OPTION 2:..... 230-460V/3PH
VOLTAGE OPTION 3:..... 575V/3PH

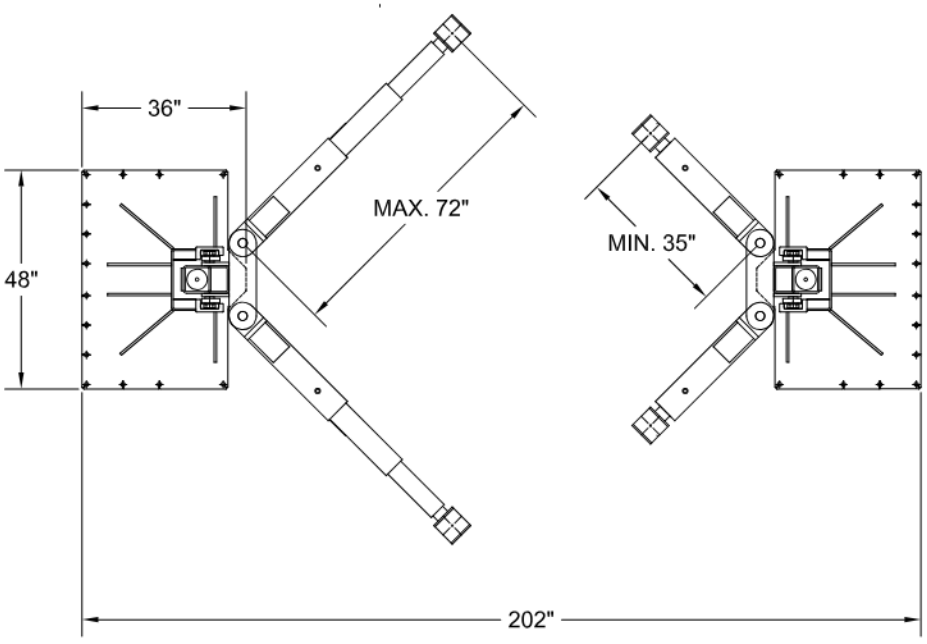


FEATURES:


1. ELECTRONICALLY CONTROLLED
2. CLEAR FLOOR FOR EASY ACCESS
3. NO OVERHEAD BEAM
4. NO EQUALIZING CABLES
5. LOW PROFILE ARMS
6. GEARED ARM RESTRAIN WITH SINGLE POINT LOCK AND RELEASE.
7. THREE STAGE ARMS
8. COMES WITH A SET OF HEIGHT ADAPTERS (3", 6" AND 9")
9. OPTIONAL POWER-ASSISTED ARM EXTENSION AVAILABLE

DWN. JK / APPR. KK	P K S	DATE MAY 01/2017	DWG PK28E-SPEC-01	A

TWO-POST LIFT MODEL: PK30E

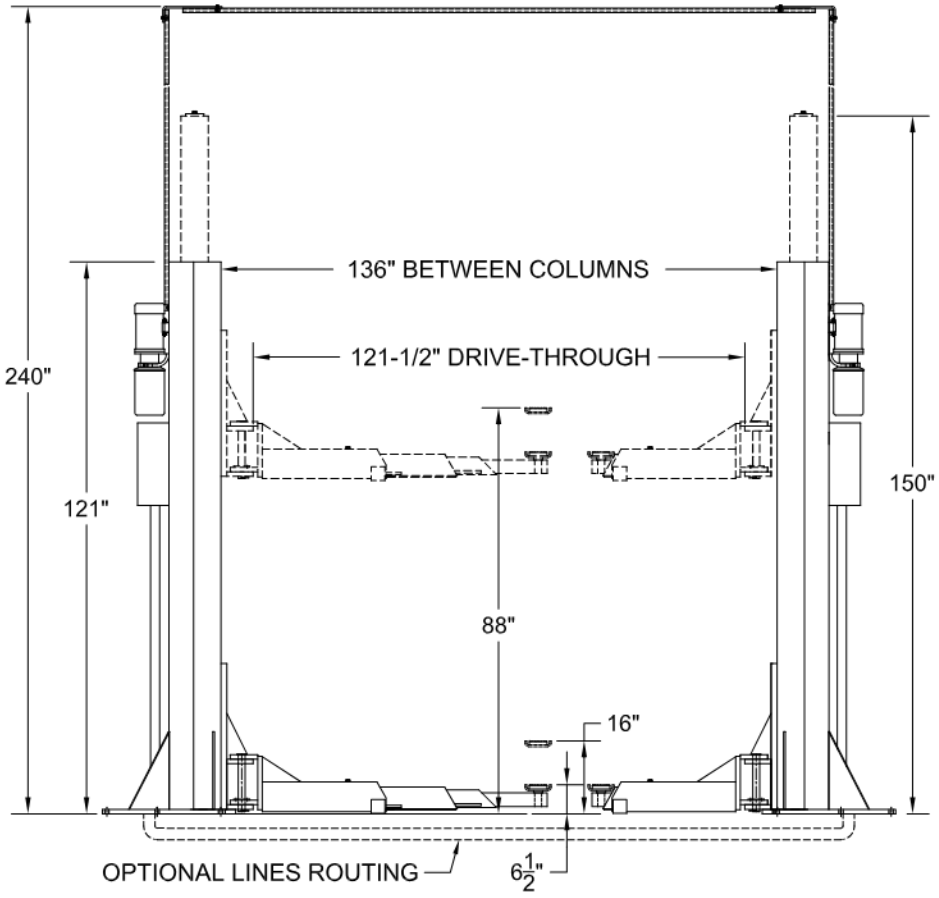

CAPACITY:.....30,000 LBS
RISE:..... 88"
MINIMUM CEILING HEIGHT REQ'D:....160"
MOTORS (2):..... 3 HP
VOLTAGE OPTION 1:..... 208-230V/1PH
VOLTAGE OPTION 2:..... 230-460V/3PH
VOLTAGE OPTION 3:..... 575V/3PH

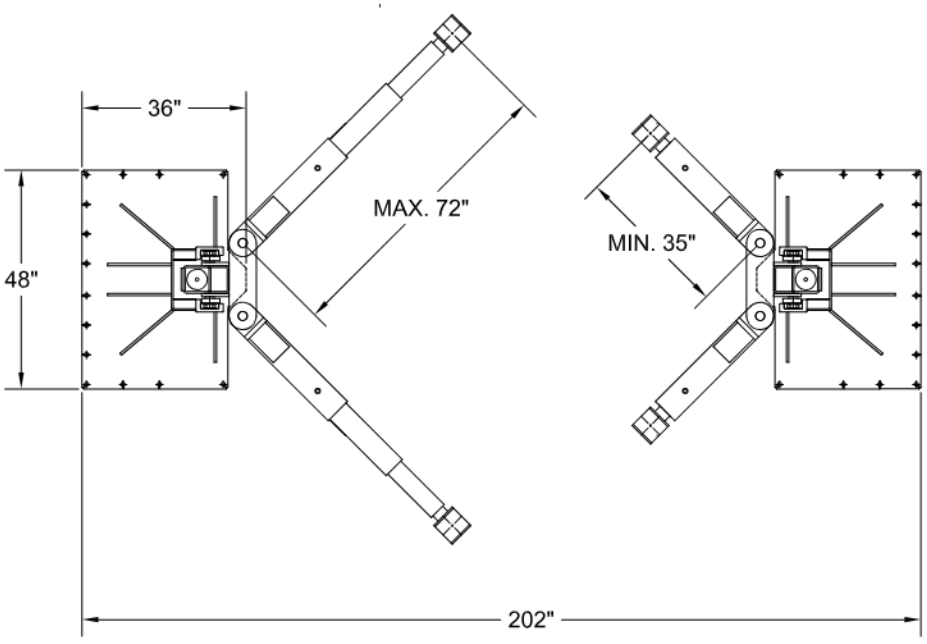


FEATURES:


1. ELECTRONICALLY CONTROLLED
2. CLEAR FLOOR FOR EASY ACCESS
3. NO OVERHEAD BEAM
4. NO EQUALIZING CABLES
5. LOW PROFILE ARMS
6. GEARED ARM RESTRAIN WITH SINGLE POINT LOCK AND RELEASE.
7. THREE STAGE ARMS
8. COMES WITH A SET OF HEIGHT ADAPTERS (3", 6" AND 9")
9. OPTIONAL POWER-ASSISTED ARM EXTENSION AVAILABLE

DWN. JK / APPR. KK	P K S	DATE MAY 01/2017	DWG PK30E-SPEC-01	A

TWO-POST LIFT MODEL: PK33E

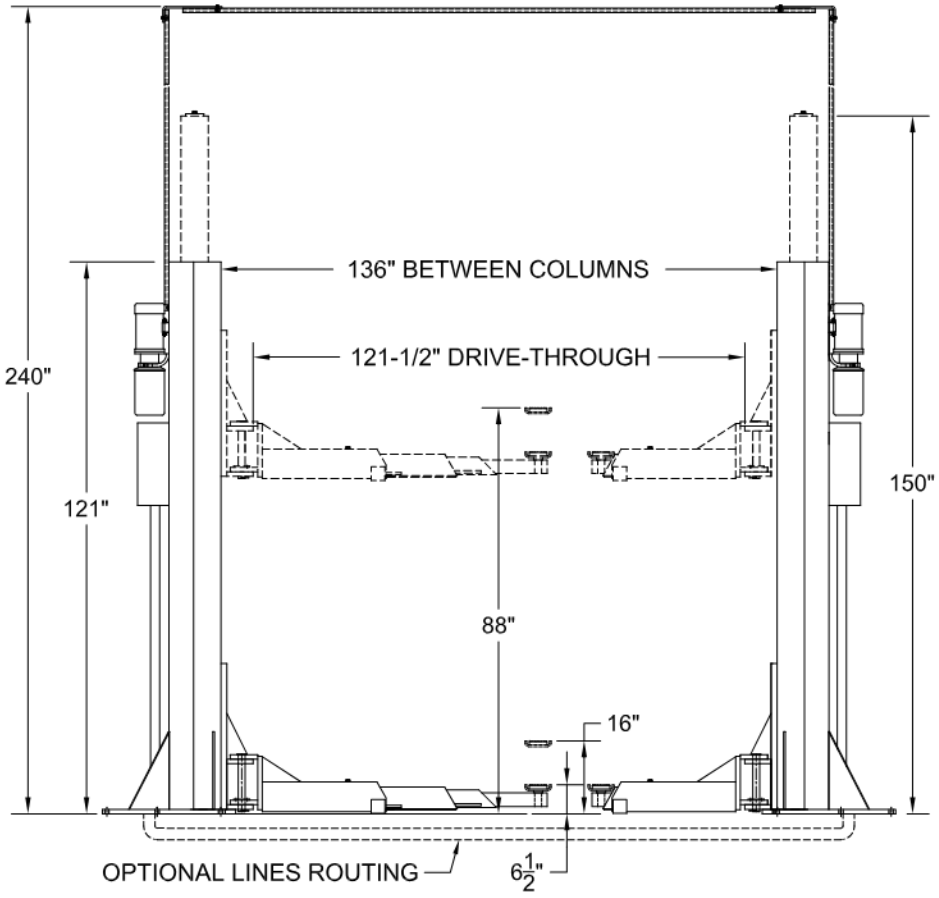

CAPACITY:.....33,000 LBS
RISE:..... 88"
MINIMUM CEILING HEIGHT REQ'D:....160"
MOTORS (2):..... 3 HP
VOLTAGE OPTION 1:..... 208-230V/1PH
VOLTAGE OPTION 2:..... 230-460V/3PH
VOLTAGE OPTION 3:..... 575V/3PH

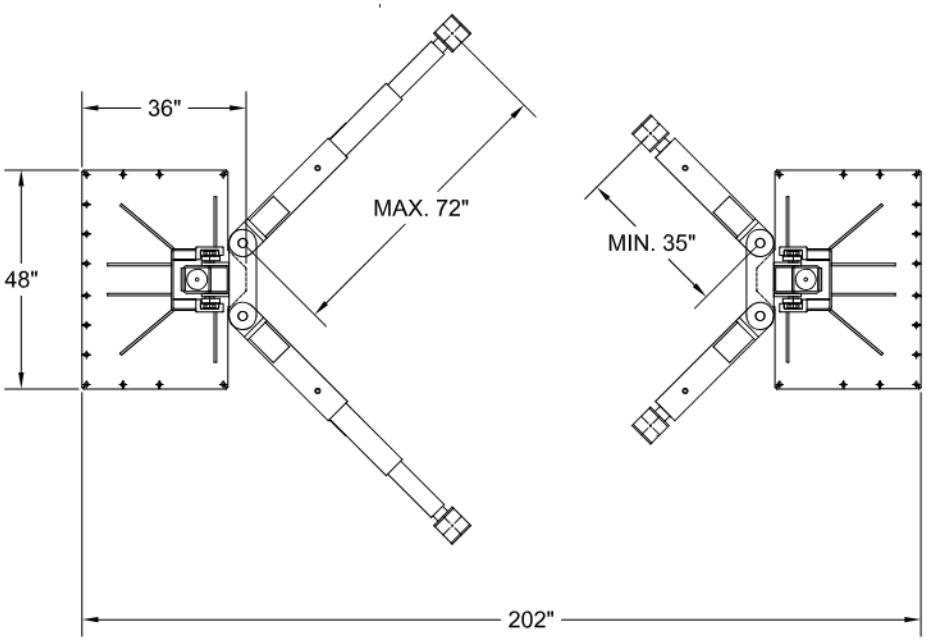

FEATURES:

1. ELECTRONICALLY CONTROLLED
2. CLEAR FLOOR FOR EASY ACCESS
3. NO OVERHEAD BEAM
4. NO EQUALIZING CABLES
5. LOW PROFILE ARMS
6. GEARED ARM RESTRAIN WITH SINGLE POINT LOCK AND RELEASE.
7. THREE STAGE ARMS
8. COMES WITH A SET OF HEIGHT ADAPTERS (3", 6" AND 9")
9. OPTIONAL POWER-ASSISTED ARM EXTENSION AVAILABLE

DWN. JK / APPR. KK	P K S	DATE MAY 01/2017	DWG PK33E-SPEC-01	A

TELEMET
Efficiency Through Simplicity™

Advice, spare parts and service

Telemet · Office in Chile

Los Canteros 8723, La Reina, Santiago 7880414, Chile

Phone +56 22 356 2735

info@telemet.com

telemet.com