
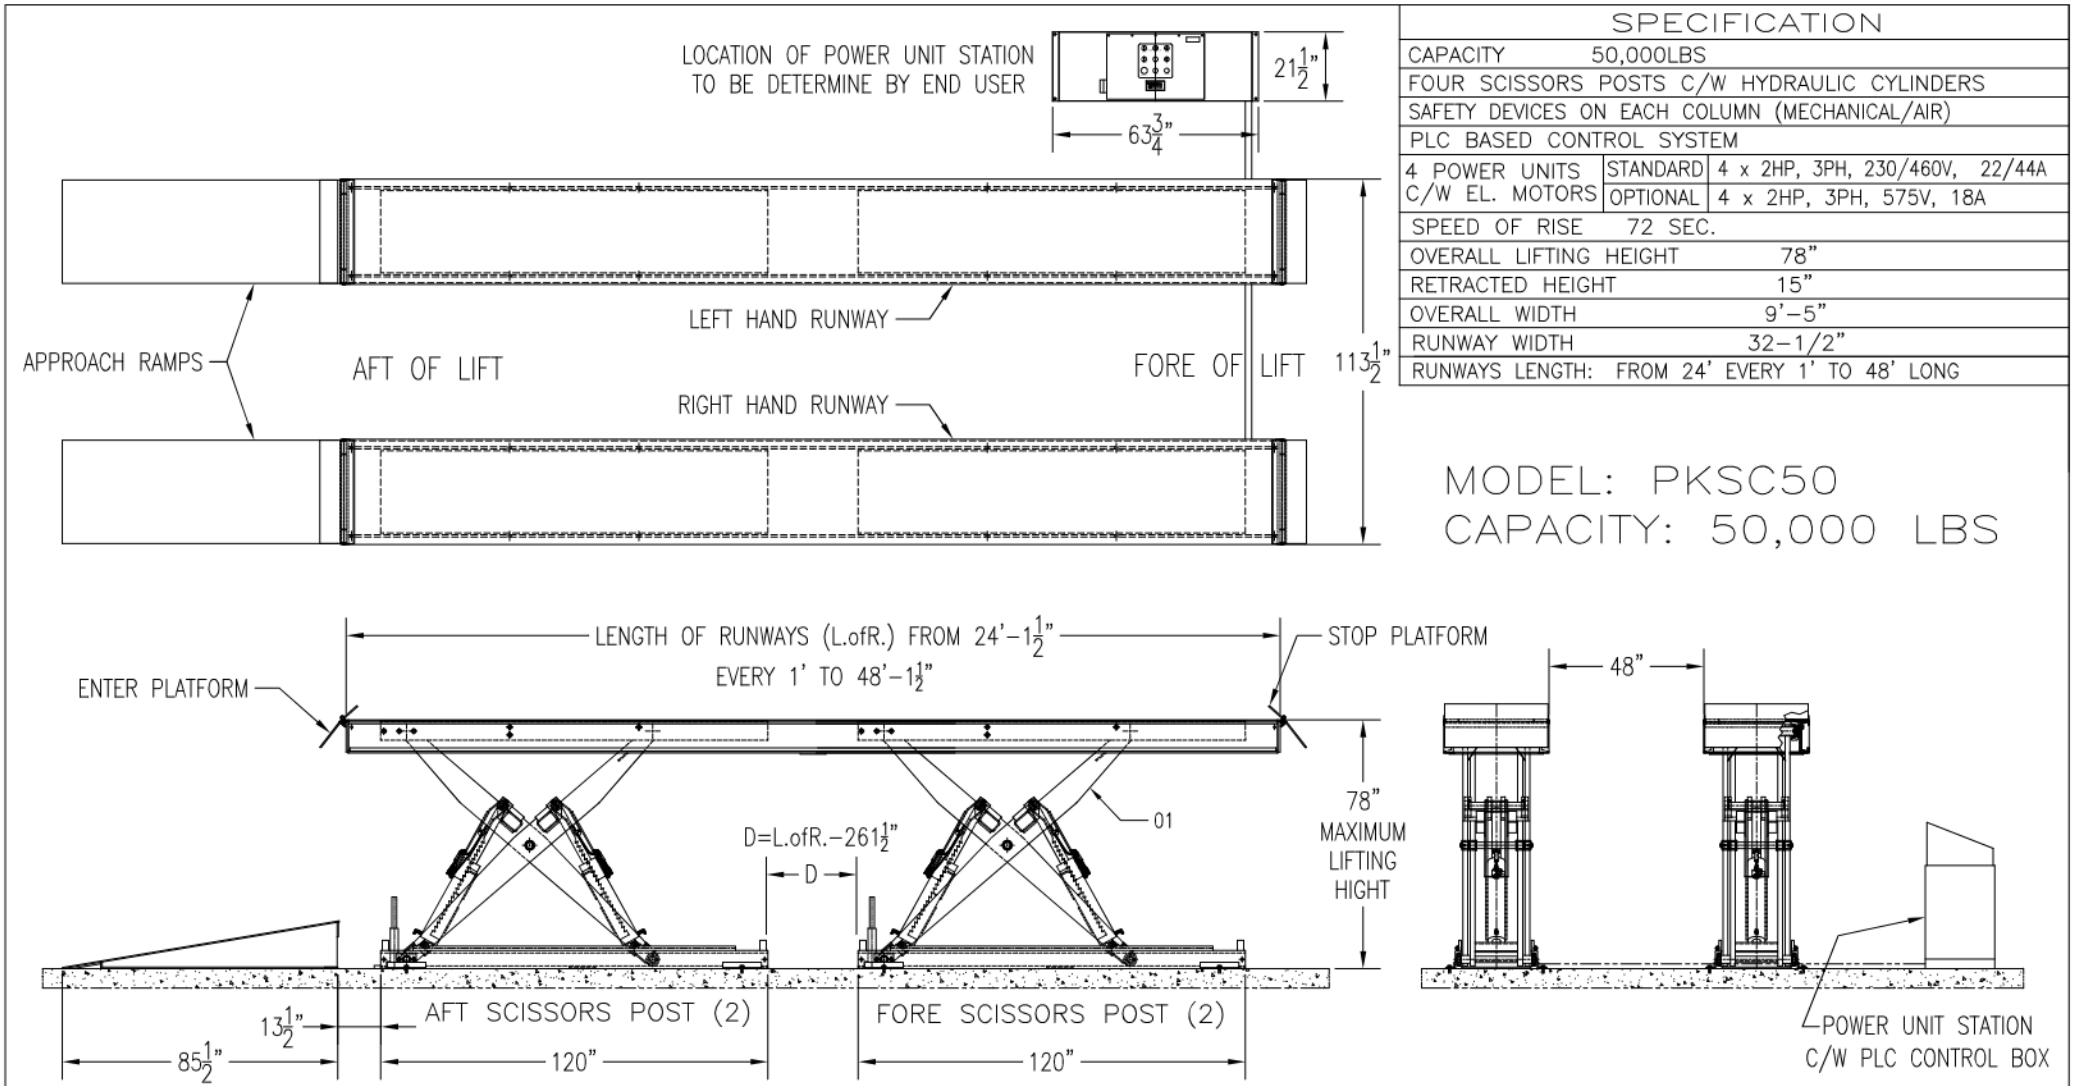


SPECIFICATION		
CAPACITY	50,000LBS	
FOUR SCISSORS POSTS C/W HYDRAULIC CYLINDERS		
SAFETY DEVICES ON EACH COLUMN (MECHANICAL/AIR)		
PLC BASED CONTROL SYSTEM		
4 POWER UNITS C/W EL. MOTORS	STANDARD	4 x 2HP, 3PH, 230/460V, 22/44A
	OPTIONAL	4 x 2HP, 3PH, 575V, 18A
SPEED OF RISE	72 SEC.	
OVERALL LIFTING HEIGHT	78"	
RETRACTED HEIGHT	15"	
OVERALL WIDTH	9'–5"	
RUNWAY WIDTH	32–1/2"	
RUNWAYS LENGTH:	FROM 24' EVERY 1' TO 48' LONG	

MODEL: PKSC50
CAPACITY: 50,000 LBS


NOTE: DRAWING NOT TO SCALE.

DWN.	TITLE			
JK	SCISSORS LIFT MODEL: PKSC50			
APPR. KK	P K S	AUG.26/2013	DWG PKSC50–FIG.01	A

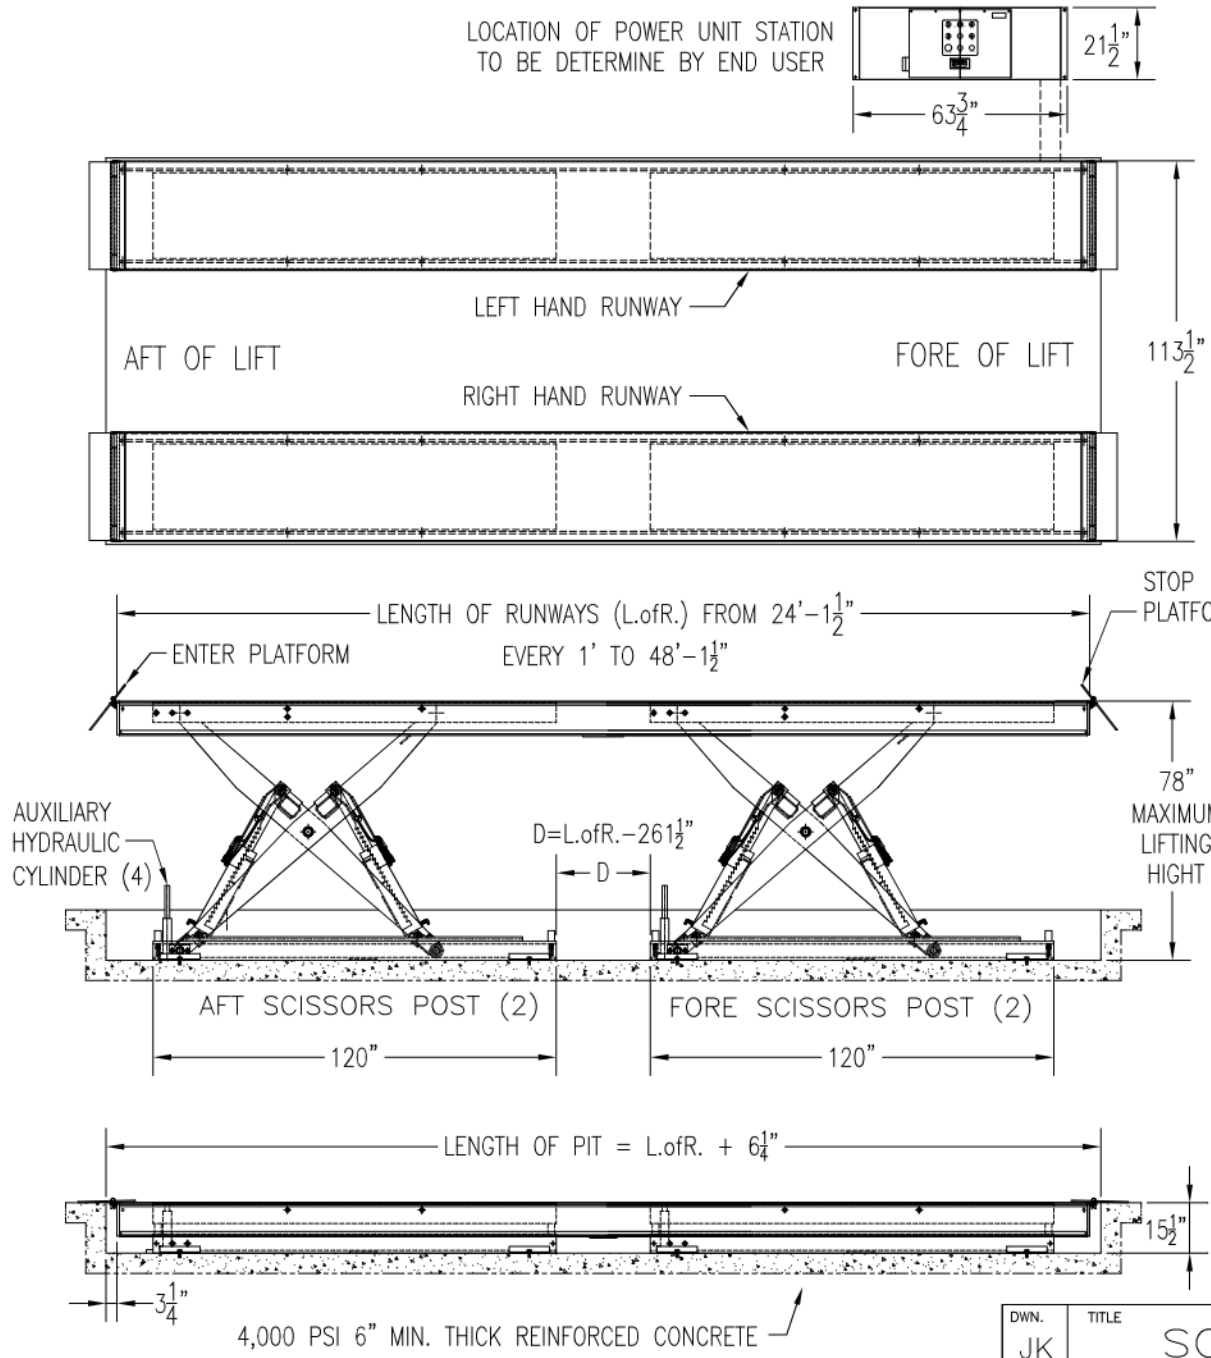


SPECIFICATION		
CAPACITY	50,000LBS	
FOUR SCISSORS POSTS C/W HYDRAULIC CYLINDERS		
SAFETY DEVICES ON EACH COLUMN (MECHANICAL/AIR)		
PLC BASED CONTROL SYSTEM		
4 POWER UNITS C/W EL. MOTORS	STANDARD	4 x 2HP, 3PH, 230/460V, 22/44A
	OPTIONAL	4 x 2HP, 3PH, 575V, 18A
SPEED OF RISE	72 SEC.	
OVERALL LIFTING HEIGHT	78"	
RETRACTED HEIGHT	15"	
OVERALL WIDTH	9'–5"	
RUNWAY WIDTH	32–1/2"	
RUNWAYS LENGTH:	FROM 24' EVERY 1' TO 48' LONG	

MODEL: PKSC50R
CAPACITY: 50,000 LBS

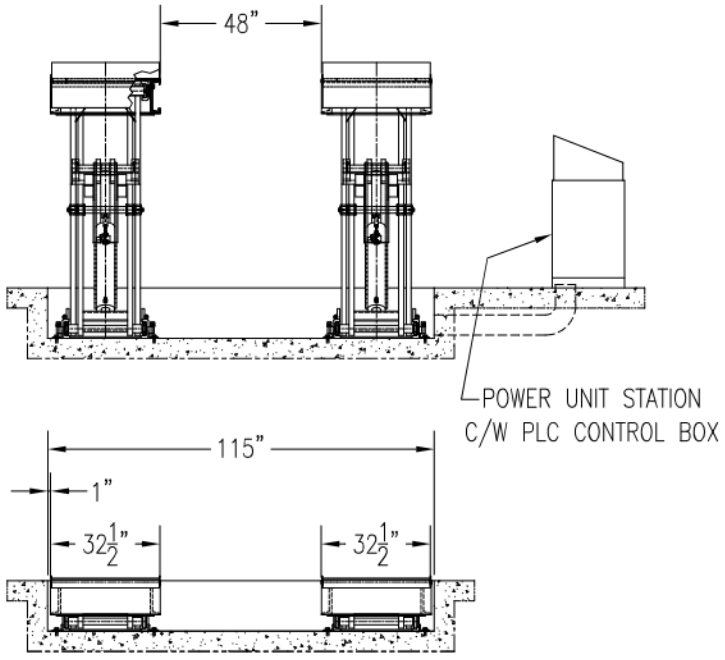

NOTE: DRAWING NOT TO SCALE.

DWN.	TITLE			
JK	SCISSORS LIFT MODEL: PKSC50R			
APPR.			DWG	
KK	P K S	AUG.26/2013	PKSC50R–FIG.01	A

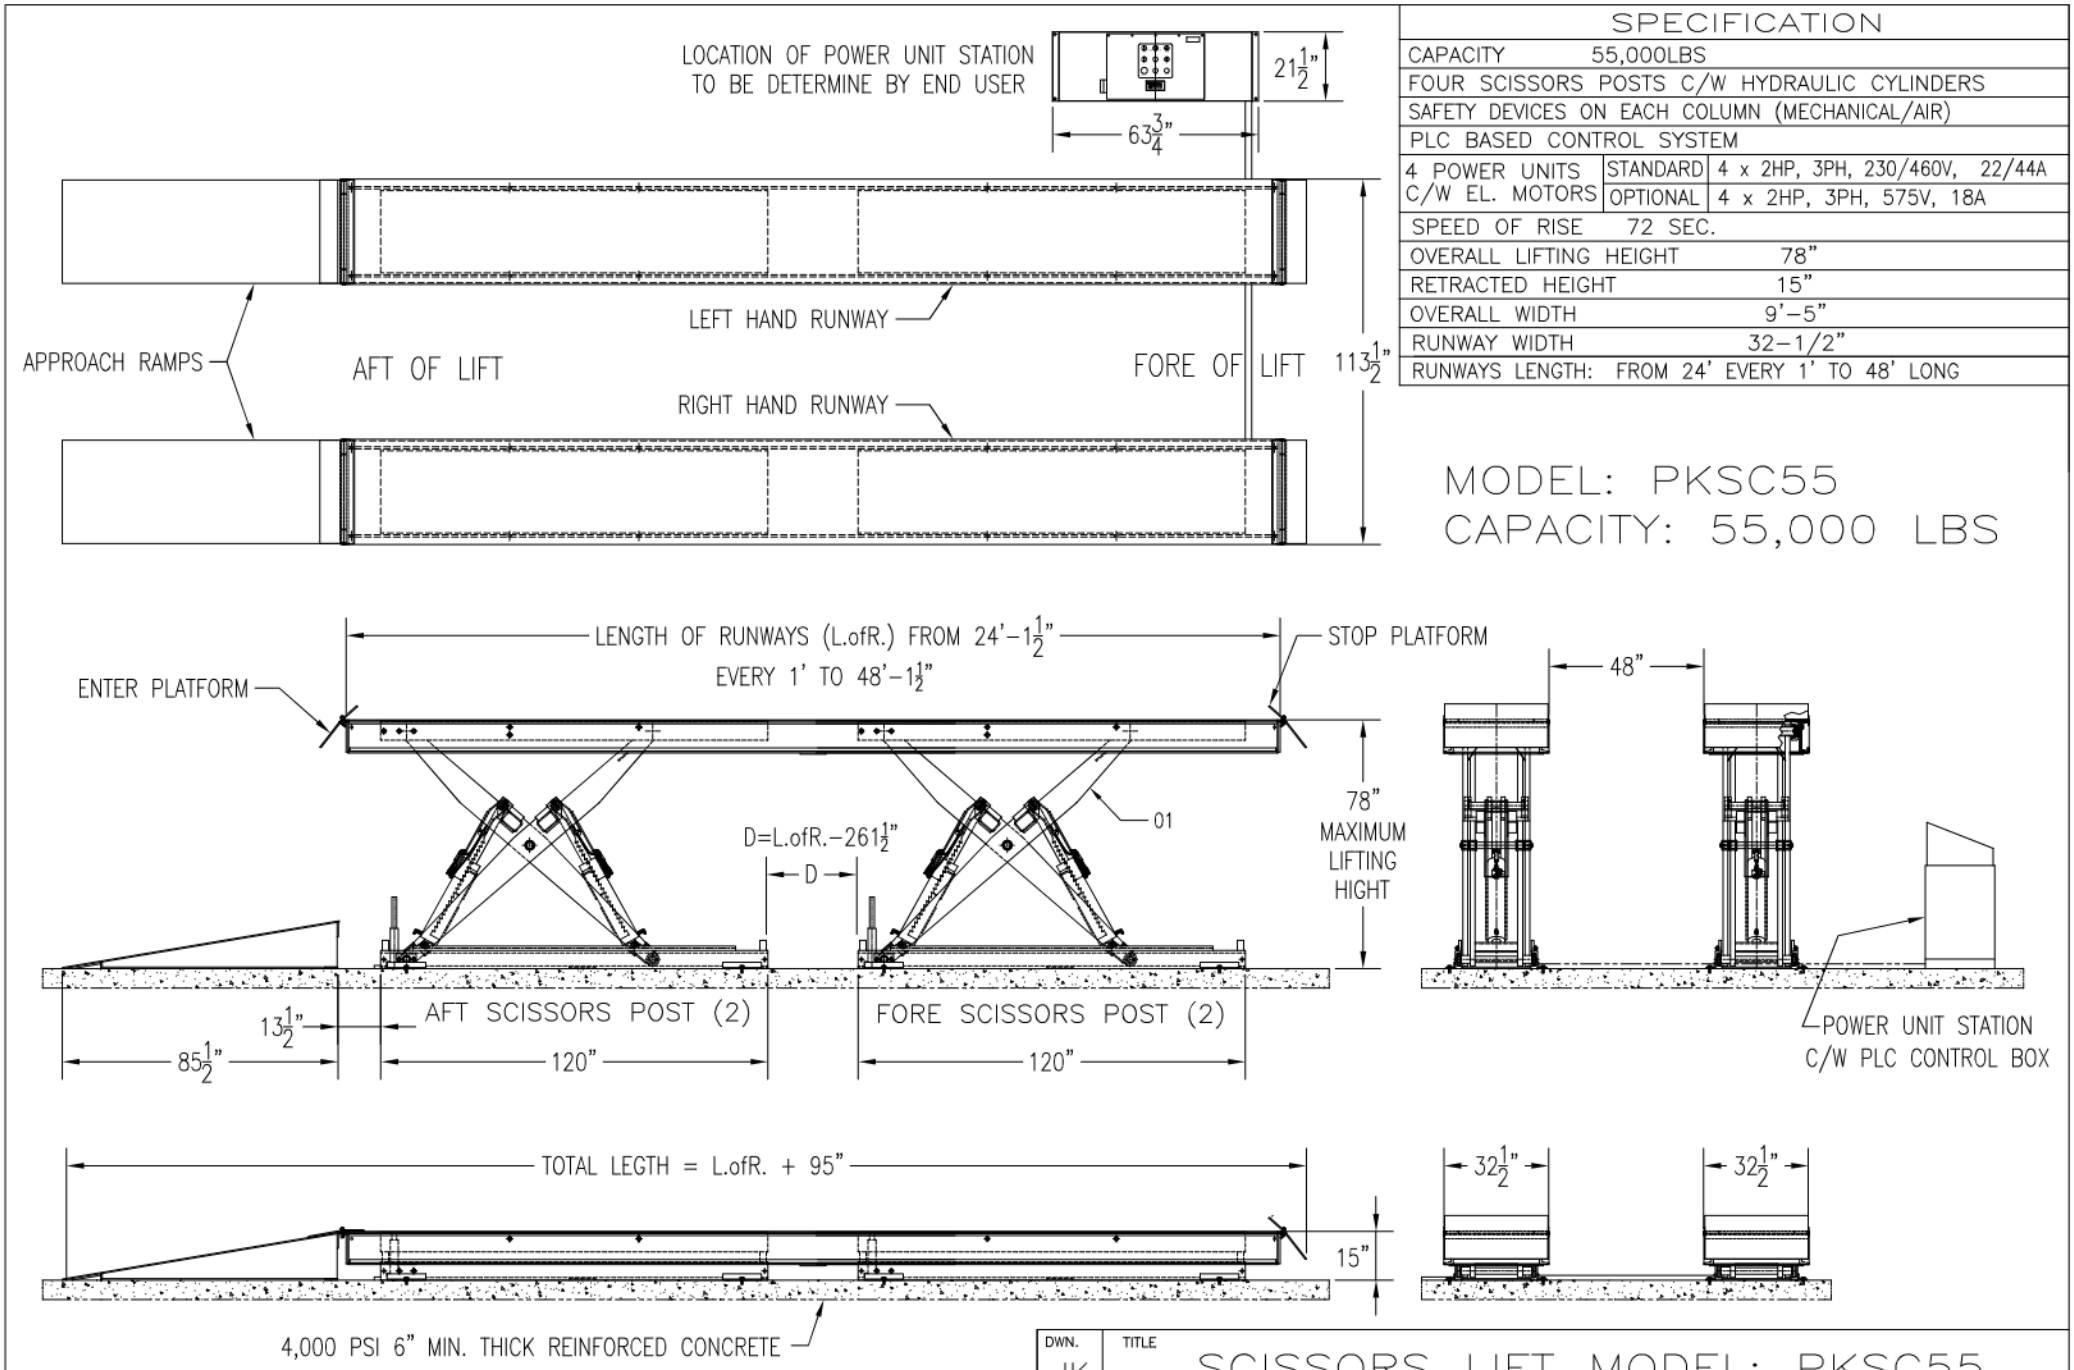


SPECIFICATION		
CAPACITY	55,000LBS	
FOUR SCISSORS POSTS C/W HYDRAULIC CYLINDERS		
SAFETY DEVICES ON EACH COLUMN (MECHANICAL/AIR)		
PLC BASED CONTROL SYSTEM		
4 POWER UNITS C/W EL. MOTORS	STANDARD	4 x 2HP, 3PH, 230/460V, 22/44A
	OPTIONAL	4 x 2HP, 3PH, 575V, 18A
SPEED OF RISE	72 SEC.	
OVERALL LIFTING HEIGHT	78"	
RETRACTED HEIGHT	15"	
OVERALL WIDTH	9'–5"	
RUNWAY WIDTH	32–1/2"	
RUNWAYS LENGTH:	FROM 24' EVERY 1' TO 48' LONG	

MODEL: PKSC55
CAPACITY: 55,000 LBS


NOTE: DRAWING NOT TO SCALE.

DWN.	TITLE			
JK	SCISSORS LIFT MODEL: PKSC55			
APPR. KK	P K S	AUG.26/2013	DWG PKSC55–FIG.01	A

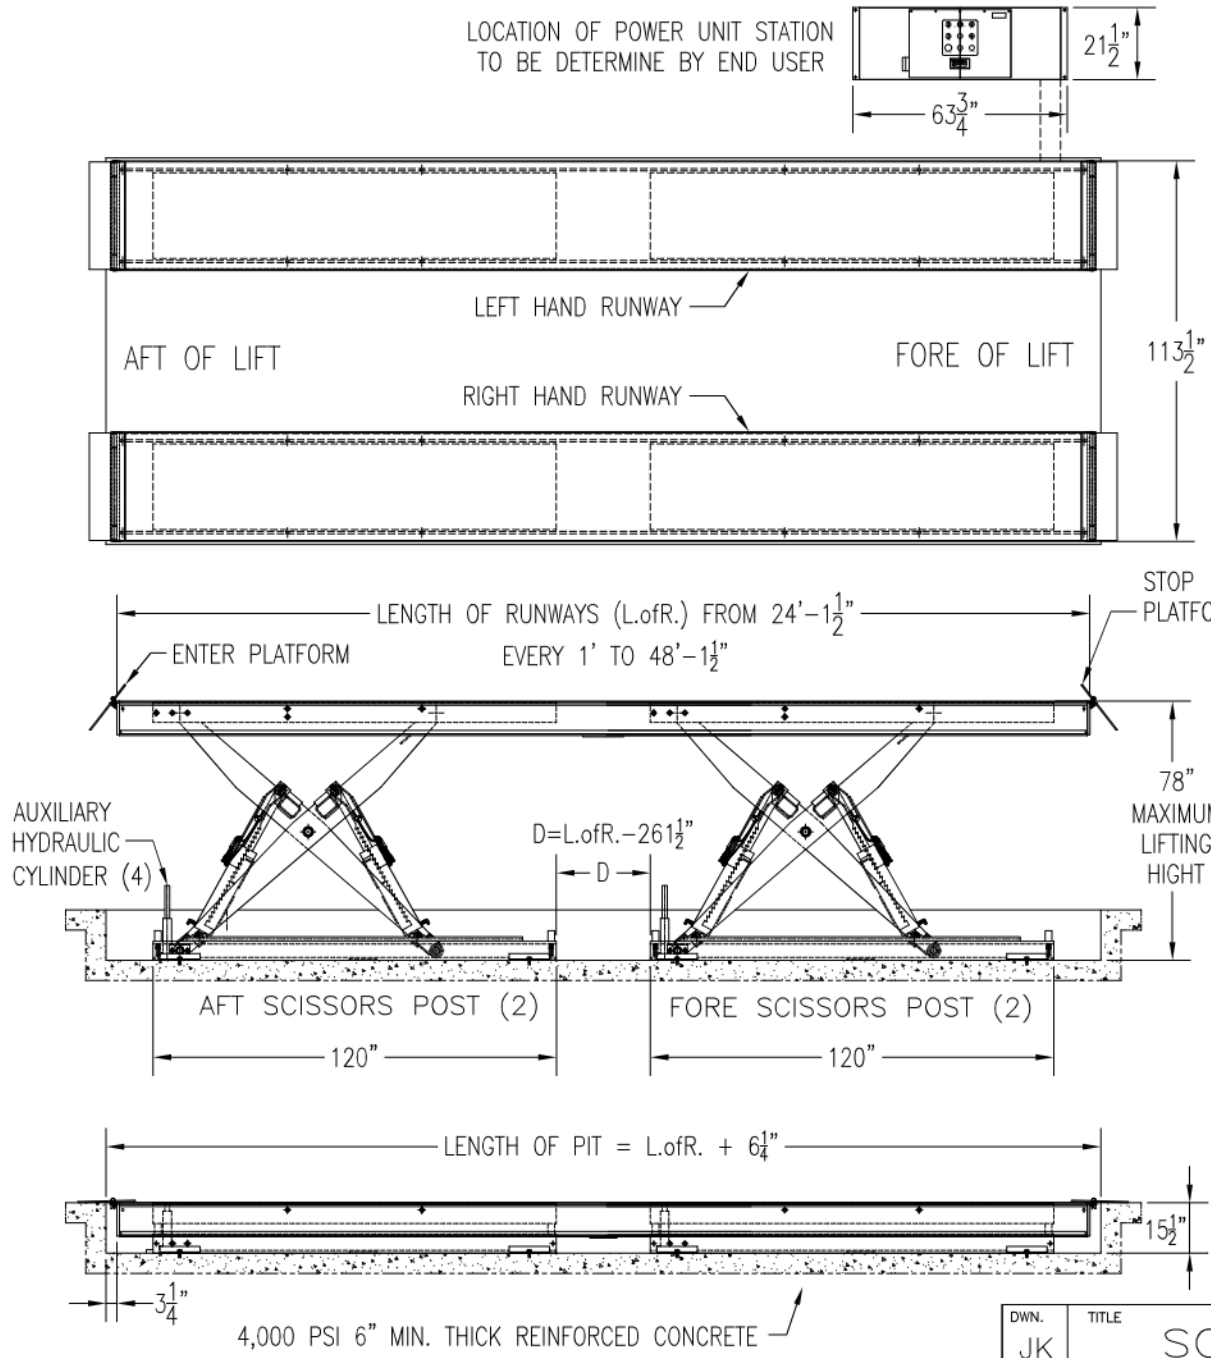


SPECIFICATION		
CAPACITY	55,000LBS	
FOUR SCISSORS POSTS C/W HYDRAULIC CYLINDERS		
SAFETY DEVICES ON EACH COLUMN (MECHANICAL/AIR)		
PLC BASED CONTROL SYSTEM		
4 POWER UNITS C/W EL. MOTORS	STANDARD	4 x 2HP, 3PH, 230/460V, 22/44A
	OPTIONAL	4 x 2HP, 3PH, 575V, 18A
SPEED OF RISE	72 SEC.	
OVERALL LIFTING HEIGHT	78"	
RETRACTED HEIGHT	15"	
OVERALL WIDTH	9'–5"	
RUNWAY WIDTH	32–1/2"	
RUNWAYS LENGTH:	FROM 24' EVERY 1' TO 48' LONG	

MODEL: PKSC55R
CAPACITY: 55,000 LBS

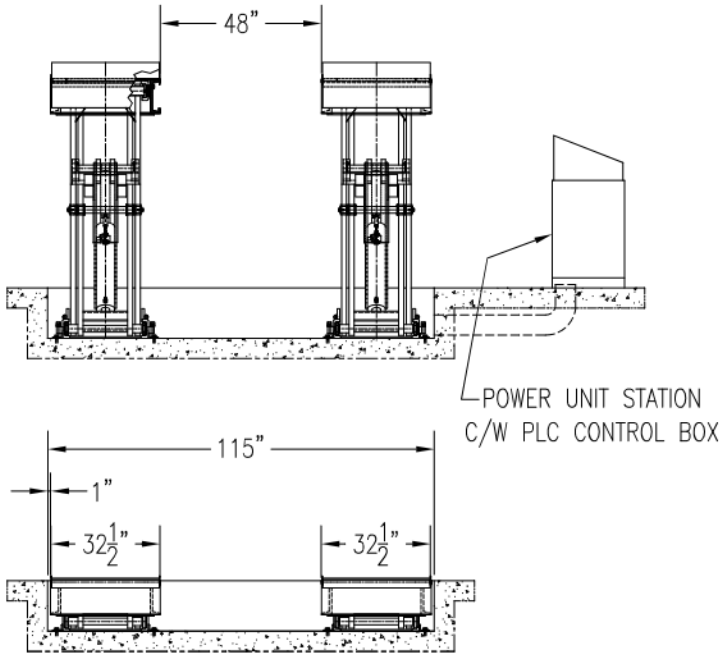

NOTE: DRAWING NOT TO SCALE.

DWN.	TITLE			
JK	SCISSORS LIFT MODEL: PKSC55R			
APPR.			DWG	
KK	P K S	AUG.26/2013	PKSC55R–FIG.01	A

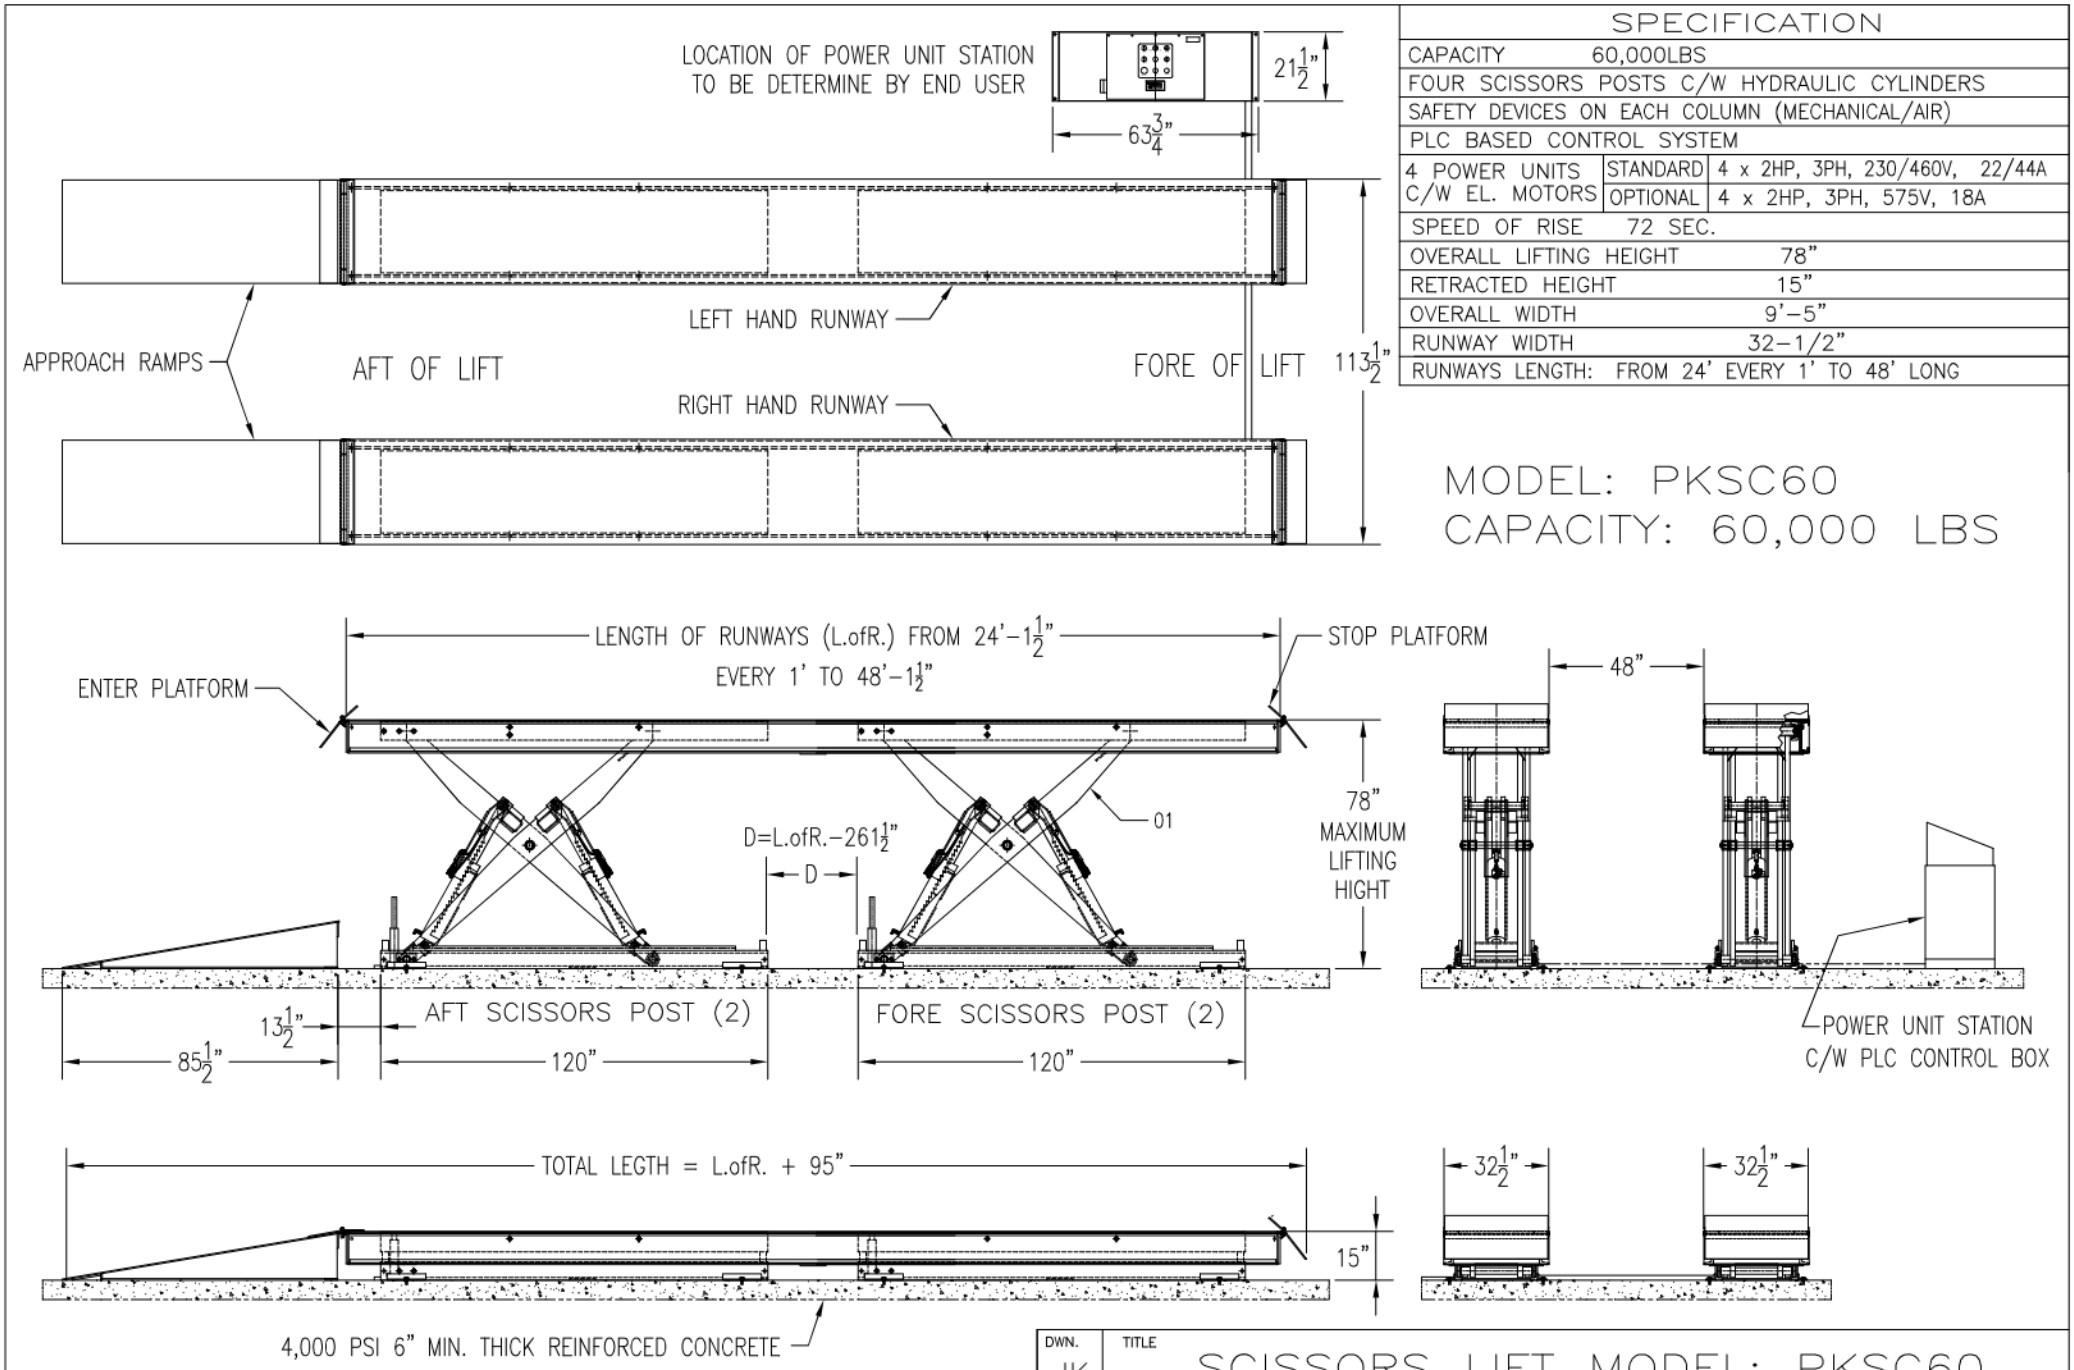


SPECIFICATION		
CAPACITY	60,000LBS	
FOUR SCISSORS POSTS C/W HYDRAULIC CYLINDERS		
SAFETY DEVICES ON EACH COLUMN (MECHANICAL/AIR)		
PLC BASED CONTROL SYSTEM		
4 POWER UNITS C/W EL. MOTORS	STANDARD	4 x 2HP, 3PH, 230/460V, 22/44A
	OPTIONAL	4 x 2HP, 3PH, 575V, 18A
SPEED OF RISE	72 SEC.	
OVERALL LIFTING HEIGHT	78"	
RETRACTED HEIGHT	15"	
OVERALL WIDTH	9'–5"	
RUNWAY WIDTH	32–1/2"	
RUNWAYS LENGTH:	FROM 24' EVERY 1' TO 48' LONG	

MODEL: PKSC60
CAPACITY: 60,000 LBS


NOTE: DRAWING NOT TO SCALE.

DWN.	TITLE			
JK	SCISSORS LIFT MODEL: PKSC60			
APPR. KK	P K S	AUG.26/2013	DWG PKSC60–FIG.01	A

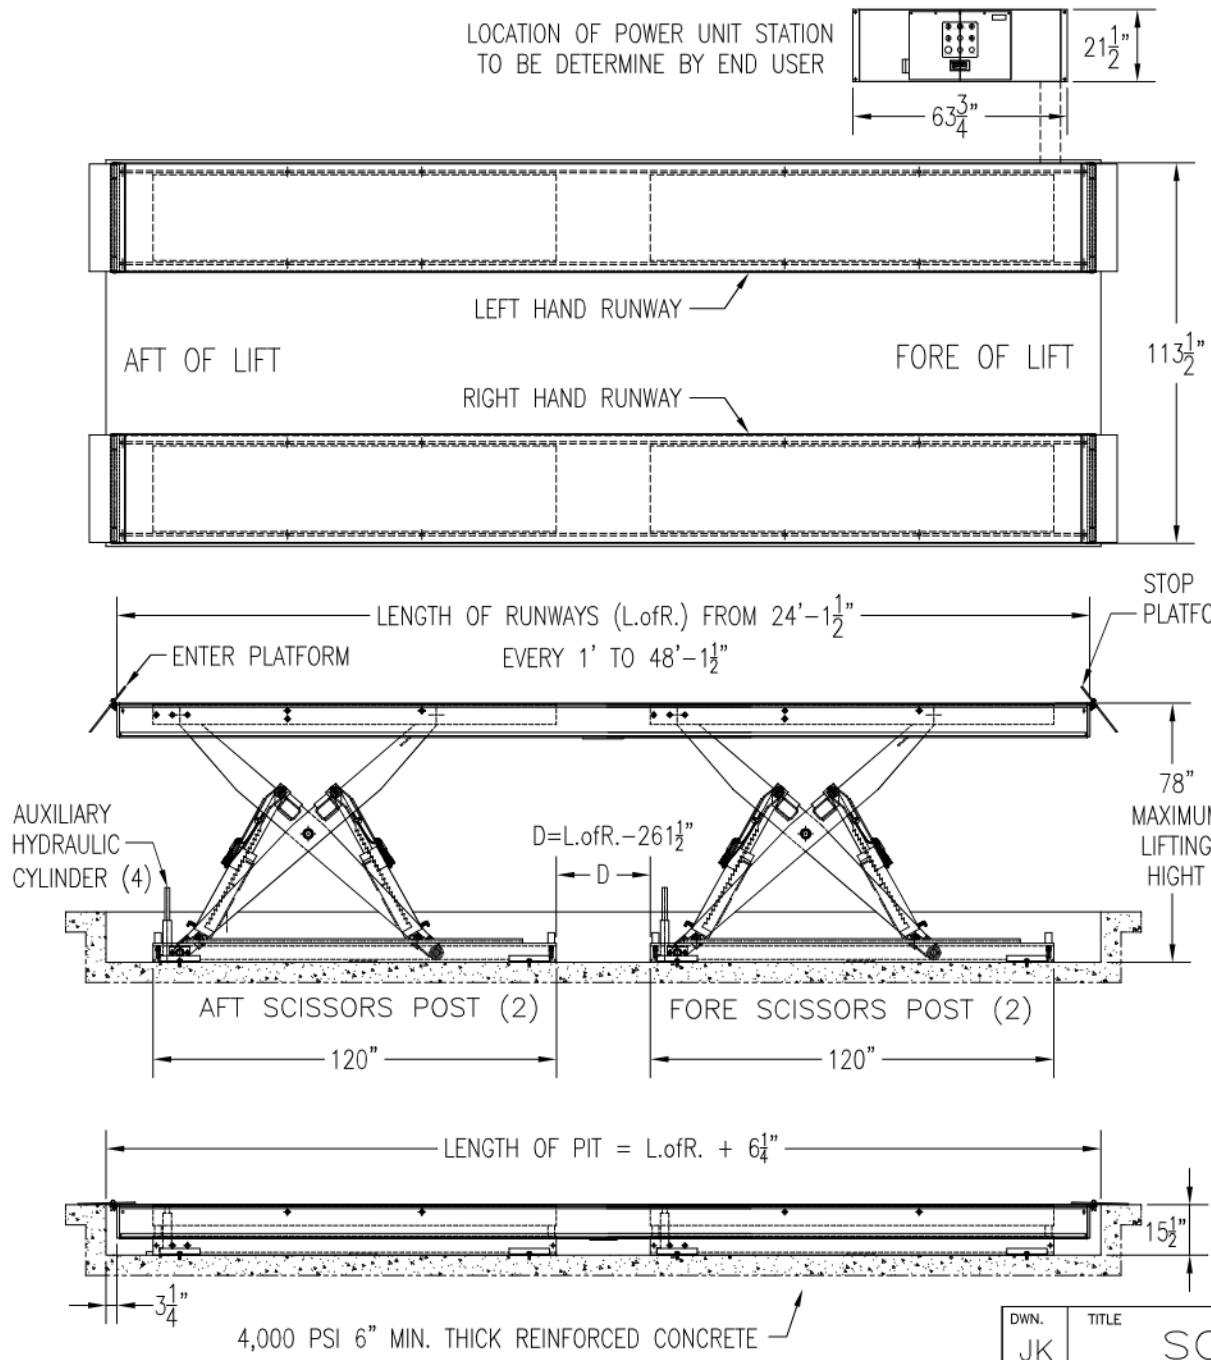


SPECIFICATION		
CAPACITY	60,000LBS	
FOUR SCISSORS POSTS C/W HYDRAULIC CYLINDERS		
SAFETY DEVICES ON EACH COLUMN (MECHANICAL/AIR)		
PLC BASED CONTROL SYSTEM		
4 POWER UNITS C/W EL. MOTORS	STANDARD	4 x 2HP, 3PH, 230/460V, 22/44A
	OPTIONAL	4 x 2HP, 3PH, 575V, 18A
SPEED OF RISE	72 SEC.	
OVERALL LIFTING HEIGHT	78"	
RETRACTED HEIGHT	15"	
OVERALL WIDTH	9'–5"	
RUNWAY WIDTH	32–1/2"	
RUNWAYS LENGTH:	FROM 24' EVERY 1' TO 48' LONG	

MODEL: PKSC60R
CAPACITY: 60,000 LBS

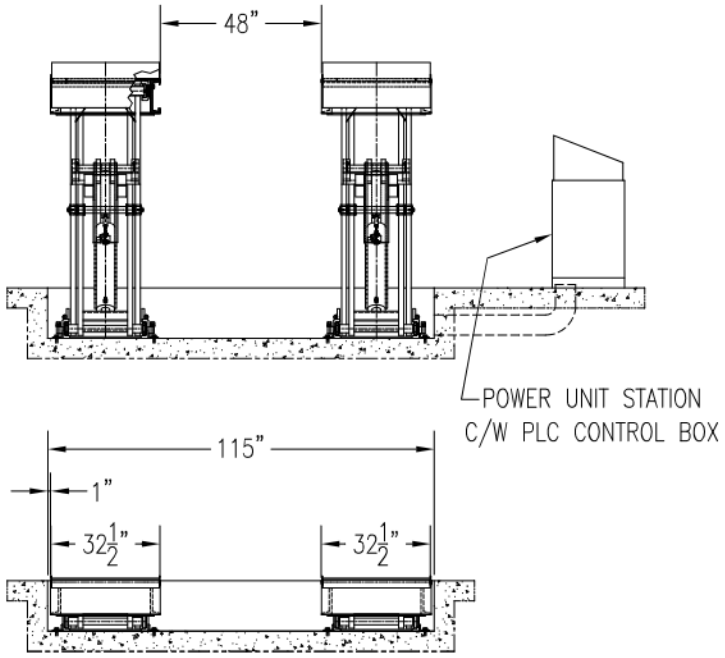

NOTE: DRAWING NOT TO SCALE.

DWN.	TITLE			
JK	SCISSORS LIFT MODEL: PKSC60R			
APPR.			DWG	
KK	P K S	AUG.26/2013	PKSC60R–FIG.01	A

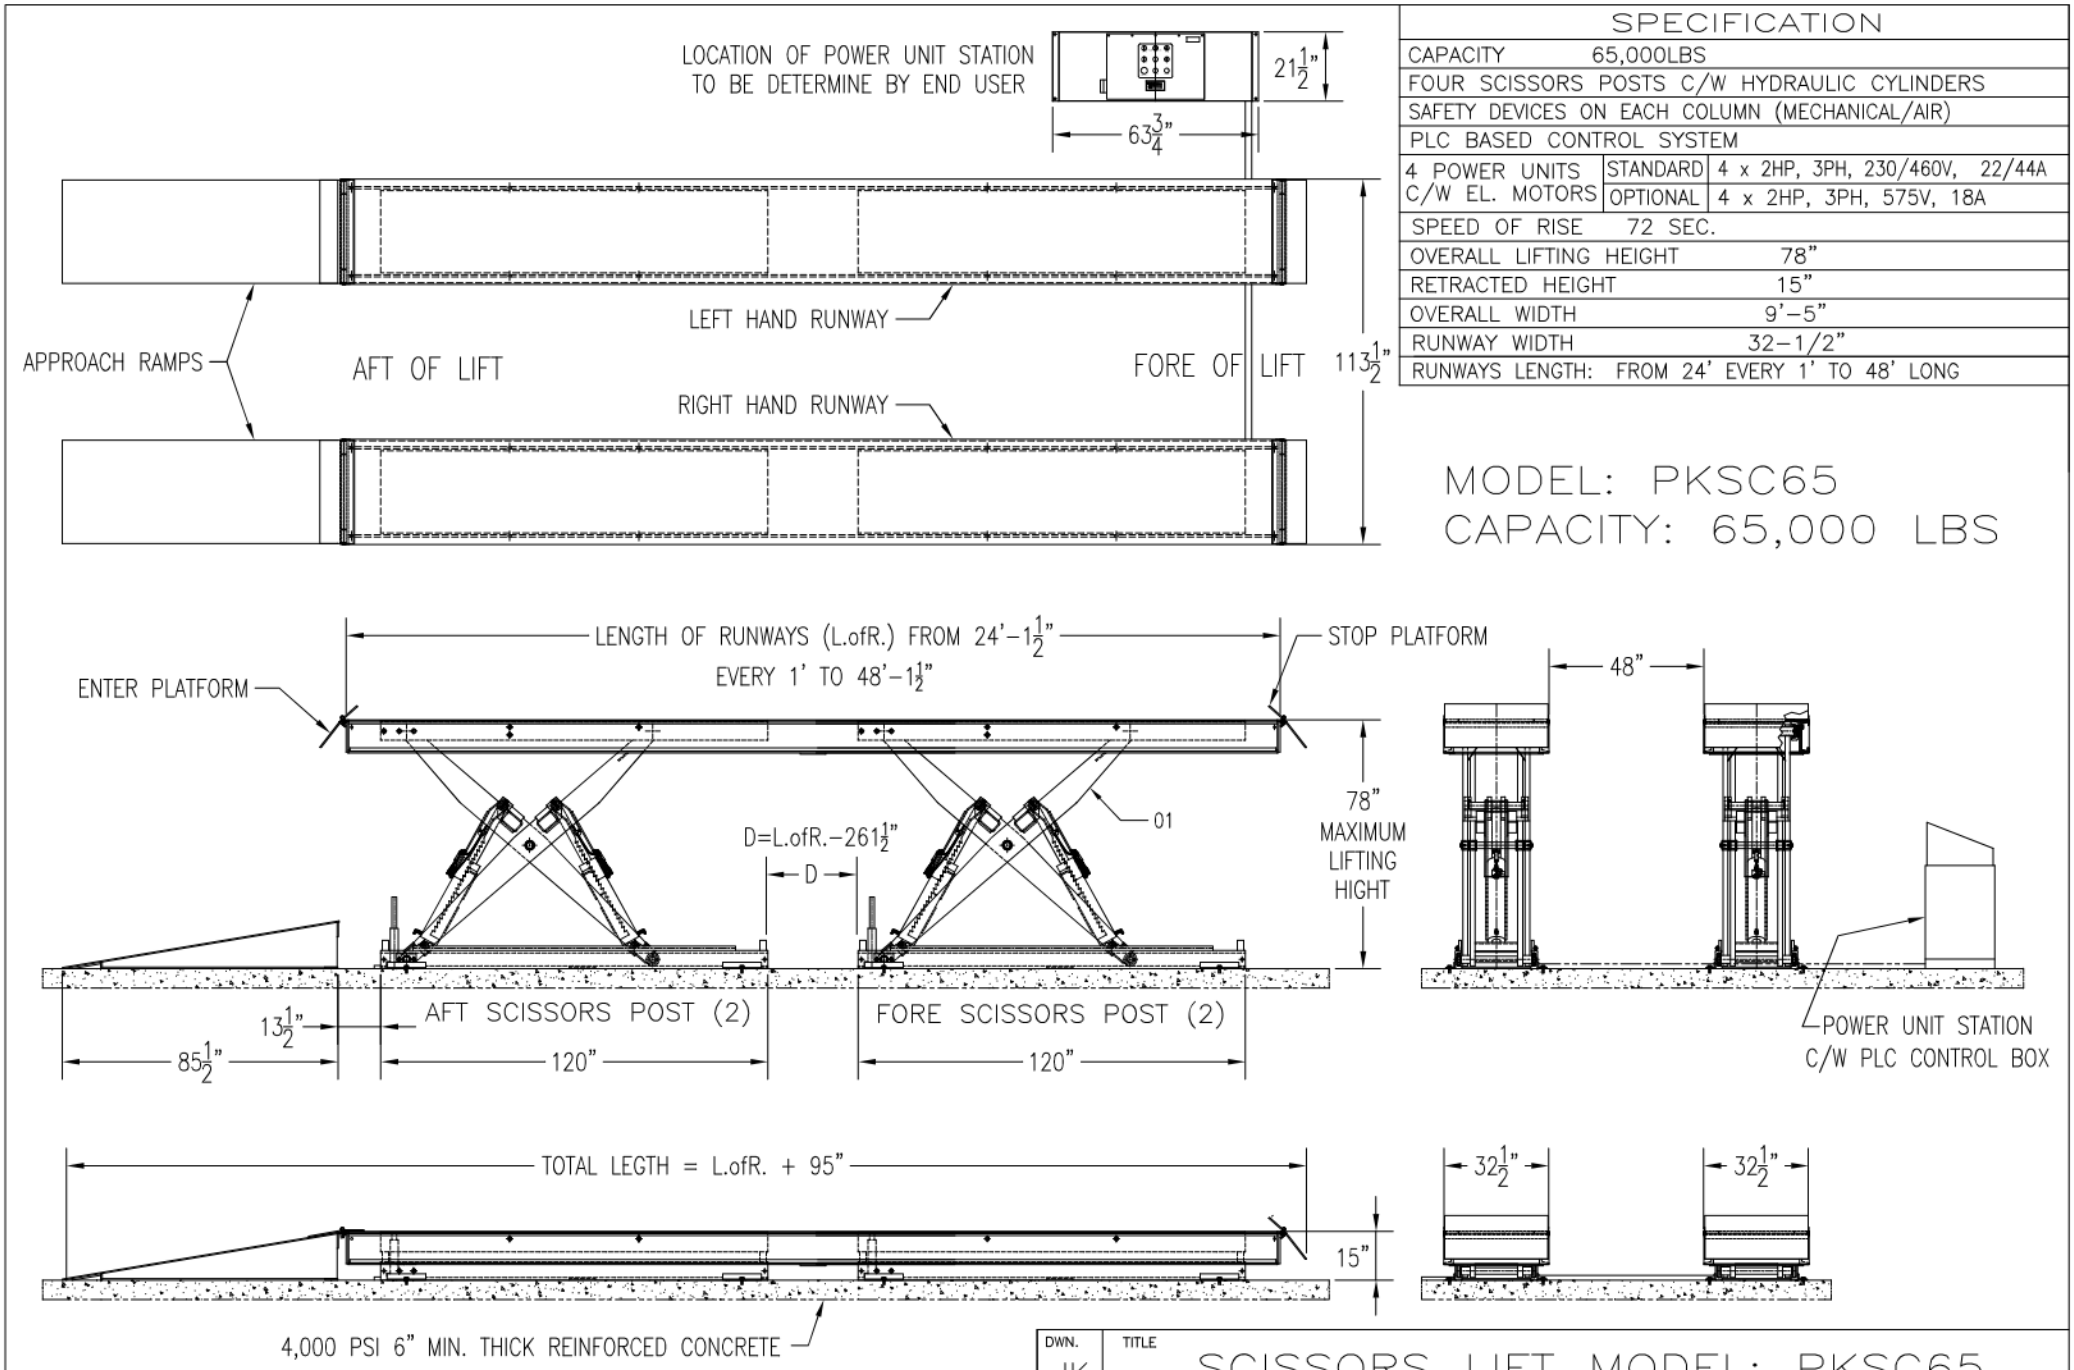


SPECIFICATION		
CAPACITY	65,000LBS	
FOUR SCISSORS POSTS C/W HYDRAULIC CYLINDERS		
SAFETY DEVICES ON EACH COLUMN (MECHANICAL/AIR)		
PLC BASED CONTROL SYSTEM		
4 POWER UNITS C/W EL. MOTORS	STANDARD	4 x 2HP, 3PH, 230/460V, 22/44A
	OPTIONAL	4 x 2HP, 3PH, 575V, 18A
SPEED OF RISE	72 SEC.	
OVERALL LIFTING HEIGHT	78"	
RETRACTED HEIGHT	15"	
OVERALL WIDTH	9'–5"	
RUNWAY WIDTH	32–1/2"	
RUNWAYS LENGTH:	FROM 24' EVERY 1' TO 48' LONG	

MODEL: PKSC65
CAPACITY: 65,000 LBS


NOTE: DRAWING NOT TO SCALE.

DWN.	TITLE			
JK	SCISSORS LIFT MODEL: PKSC65			
APPR. KK	P K S	AUG.26/2013	DWG PKSC65–FIG.01	A

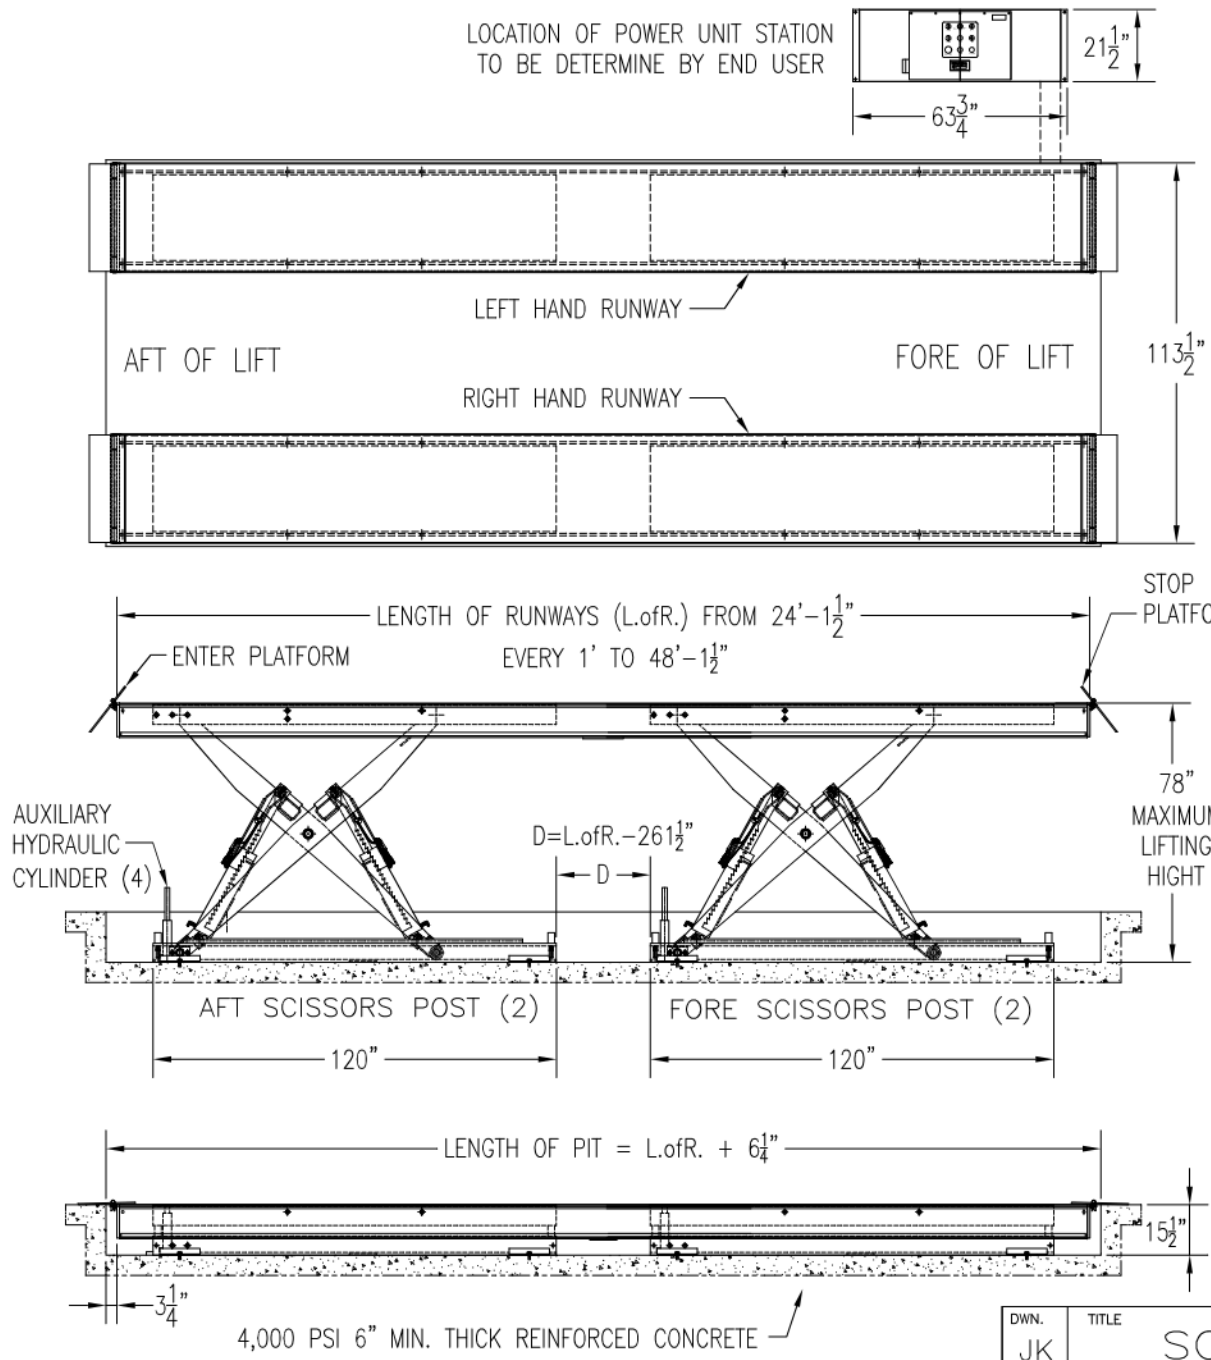


SPECIFICATION		
CAPACITY	65,000LBS	
FOUR SCISSORS POSTS C/W HYDRAULIC CYLINDERS		
SAFETY DEVICES ON EACH COLUMN (MECHANICAL/AIR)		
PLC BASED CONTROL SYSTEM		
4 POWER UNITS C/W EL. MOTORS	STANDARD	4 x 2HP, 3PH, 230/460V, 22/44A
	OPTIONAL	4 x 2HP, 3PH, 575V, 18A
SPEED OF RISE	72 SEC.	
OVERALL LIFTING HEIGHT	78"	
RETRACTED HEIGHT	15"	
OVERALL WIDTH	9'–5"	
RUNWAY WIDTH	32–1/2"	
RUNWAYS LENGTH:	FROM 24' EVERY 1' TO 48' LONG	

MODEL: PKSC65R
CAPACITY: 65,000 LBS

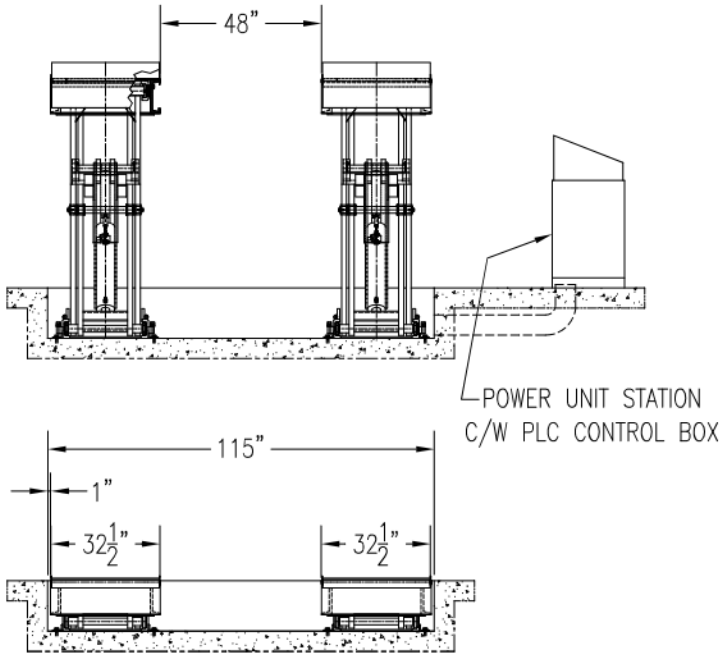

NOTE: DRAWING NOT TO SCALE.

DWN.	TITLE			
JK	SCISSORS LIFT MODEL: PKSC65R			
APPR.			DWG	
KK	P K S	AUG.26/2013	PKSC65R–FIG.01	A

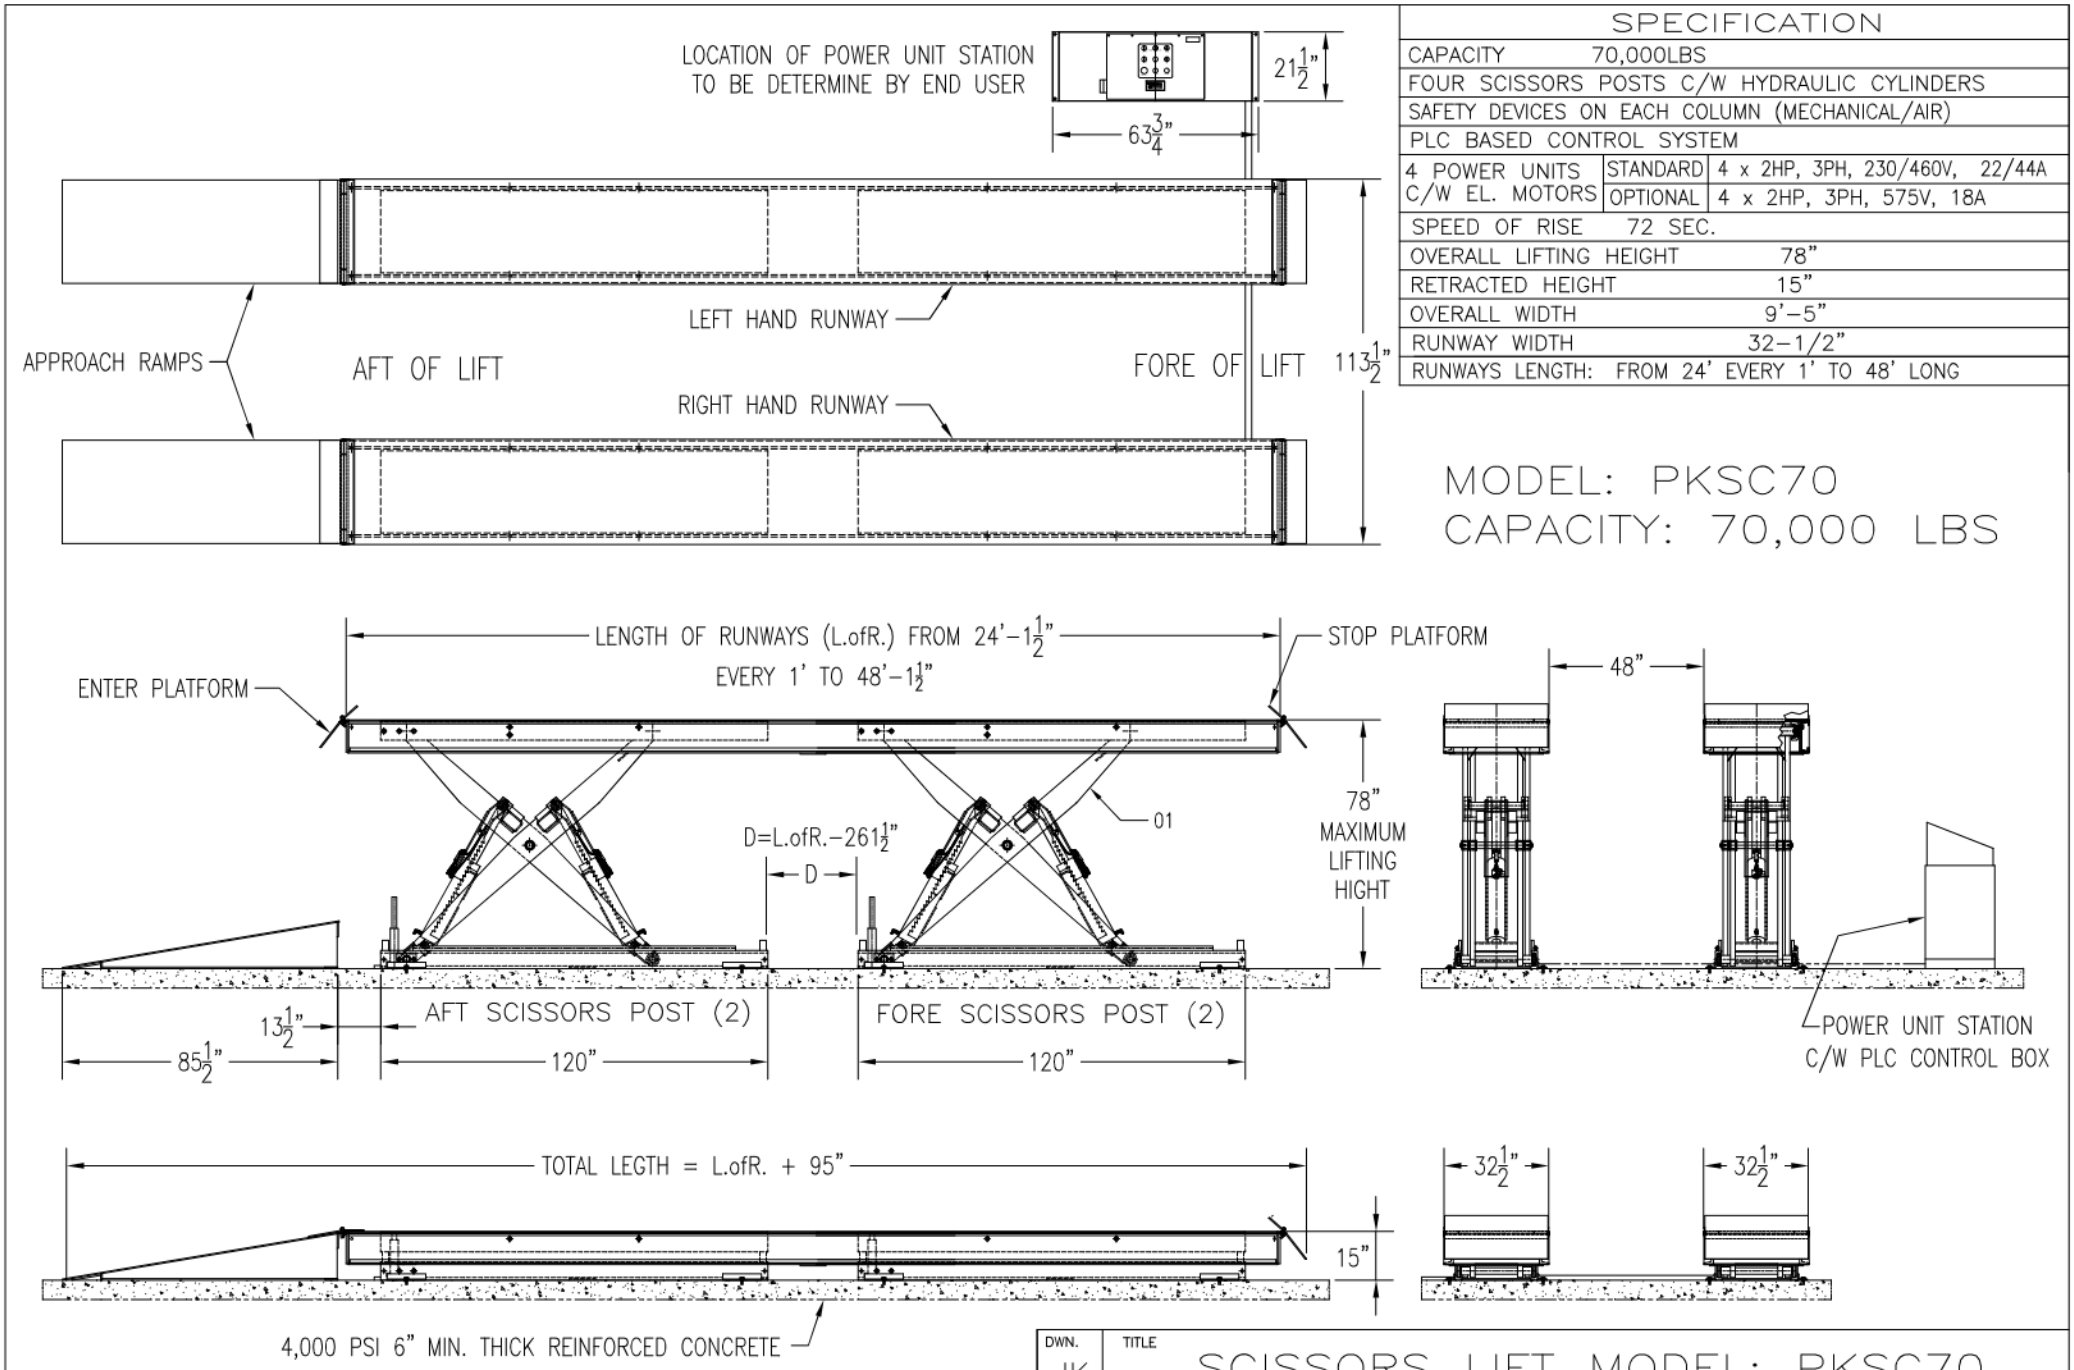


SPECIFICATION		
CAPACITY 70,000LBS		
FOUR SCISSORS POSTS C/W HYDRAULIC CYLINDERS		
SAFETY DEVICES ON EACH COLUMN (MECHANICAL/AIR)		
PLC BASED CONTROL SYSTEM		
4 POWER UNITS C/W EL. MOTORS	STANDARD	4 x 2HP, 3PH, 230/460V, 22/44A
	OPTIONAL	4 x 2HP, 3PH, 575V, 18A
SPEED OF RISE 72 SEC.		
OVERALL LIFTING HEIGHT 78"		
RETRACTED HEIGHT 15"		
OVERALL WIDTH 9'–5"		
RUNWAY WIDTH 32–1/2"		
RUNWAYS LENGTH: FROM 24' EVERY 1' TO 48' LONG		

MODEL: PKSC70
CAPACITY: 70,000 LBS


NOTE: DRAWING NOT TO SCALE.

DWN.	TITLE			
JK	SCISSORS LIFT MODEL: PKSC70			
APPR. KK	P K S	AUG.26/2013	DWG PKSC70–FIG.01	A

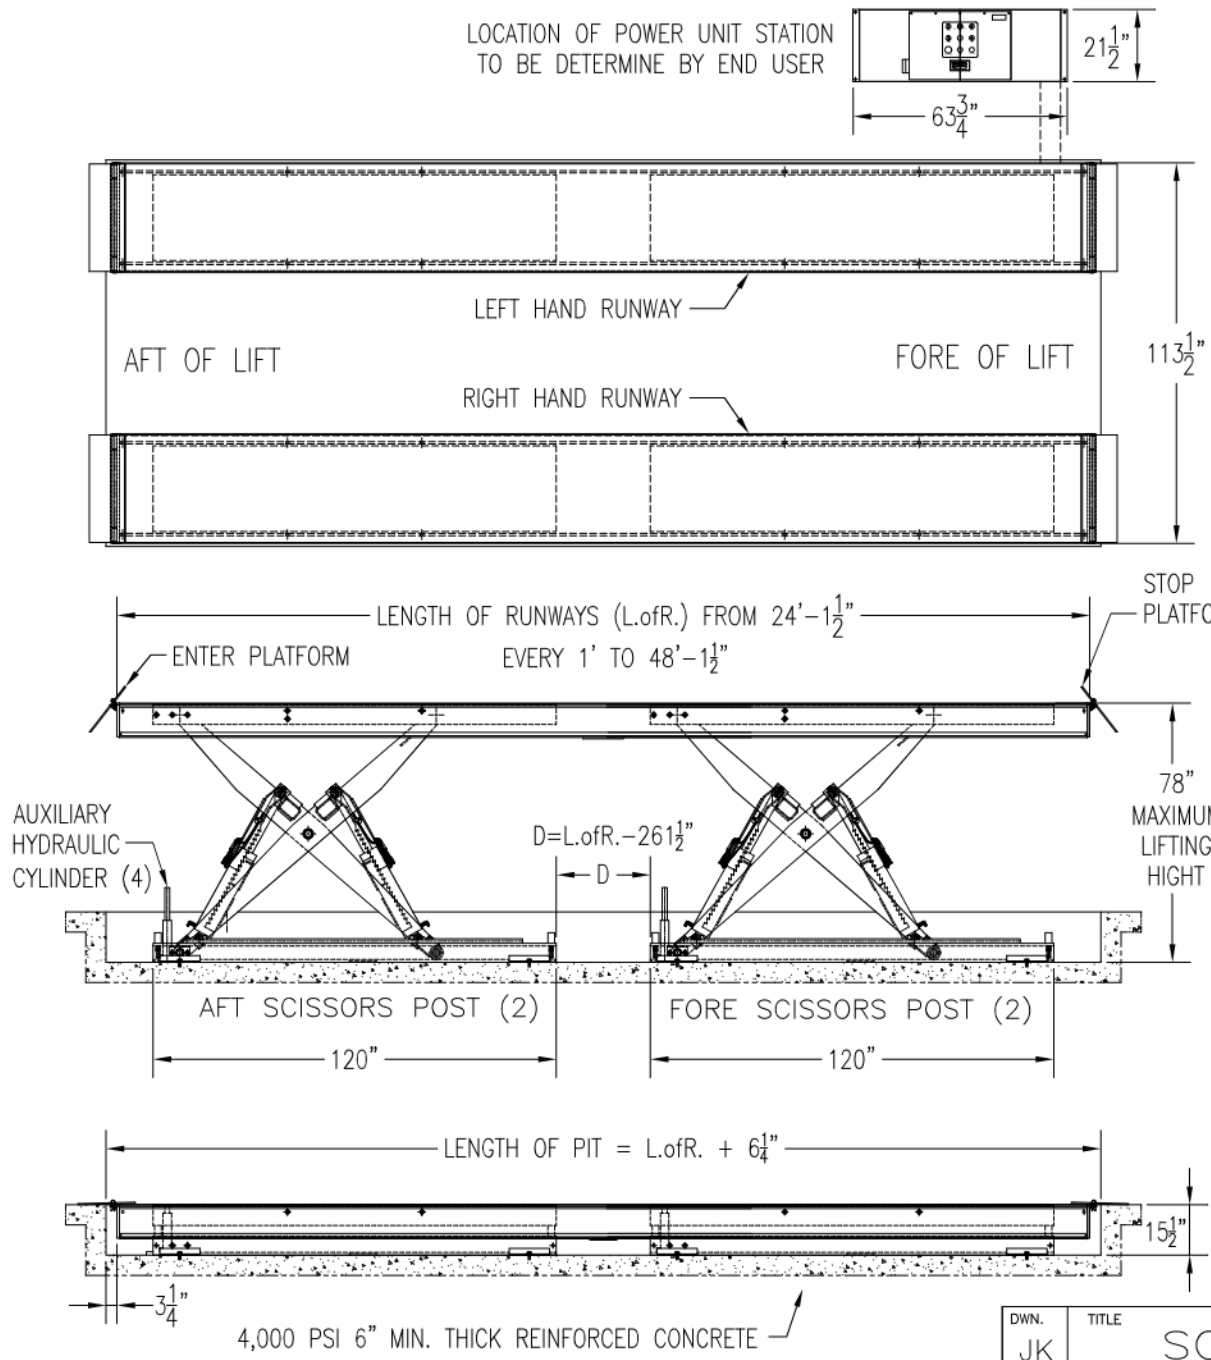


SPECIFICATION		
CAPACITY	70,000LBS	
FOUR SCISSORS POSTS C/W HYDRAULIC CYLINDERS		
SAFETY DEVICES ON EACH COLUMN (MECHANICAL/AIR)		
PLC BASED CONTROL SYSTEM		
4 POWER UNITS C/W EL. MOTORS	STANDARD	4 x 2HP, 3PH, 230/460V, 22/44A
	OPTIONAL	4 x 2HP, 3PH, 575V, 18A
SPEED OF RISE	72 SEC.	
OVERALL LIFTING HEIGHT	78"	
RETRACTED HEIGHT	15"	
OVERALL WIDTH	9'–5"	
RUNWAY WIDTH	32–1/2"	
RUNWAYS LENGTH:	FROM 24' EVERY 1' TO 48' LONG	

MODEL: PKSC70R
CAPACITY: 70,000 LBS

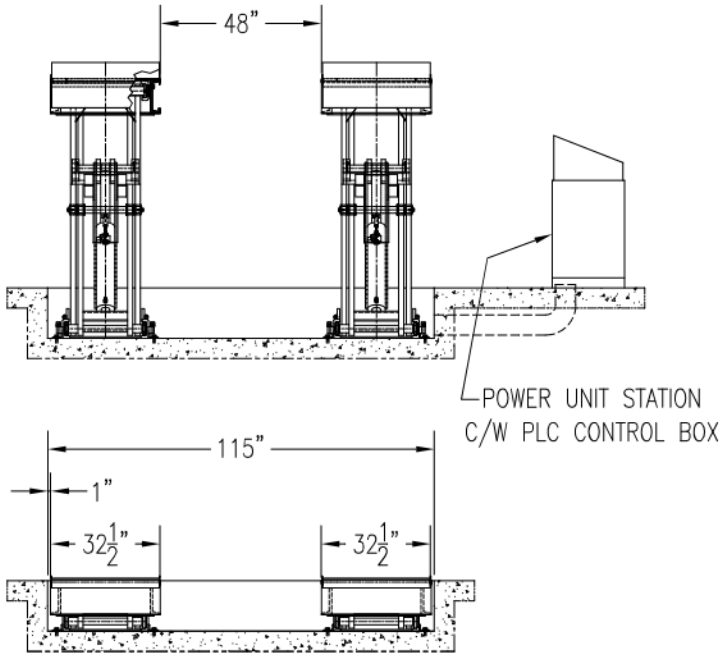

NOTE: DRAWING NOT TO SCALE.

DWN.	TITLE			
JK	SCISSORS LIFT MODEL: PKSC70R			
APPR.			DWG	
KK	P K S	AUG.26/2013	PKSC70R–FIG.01	A

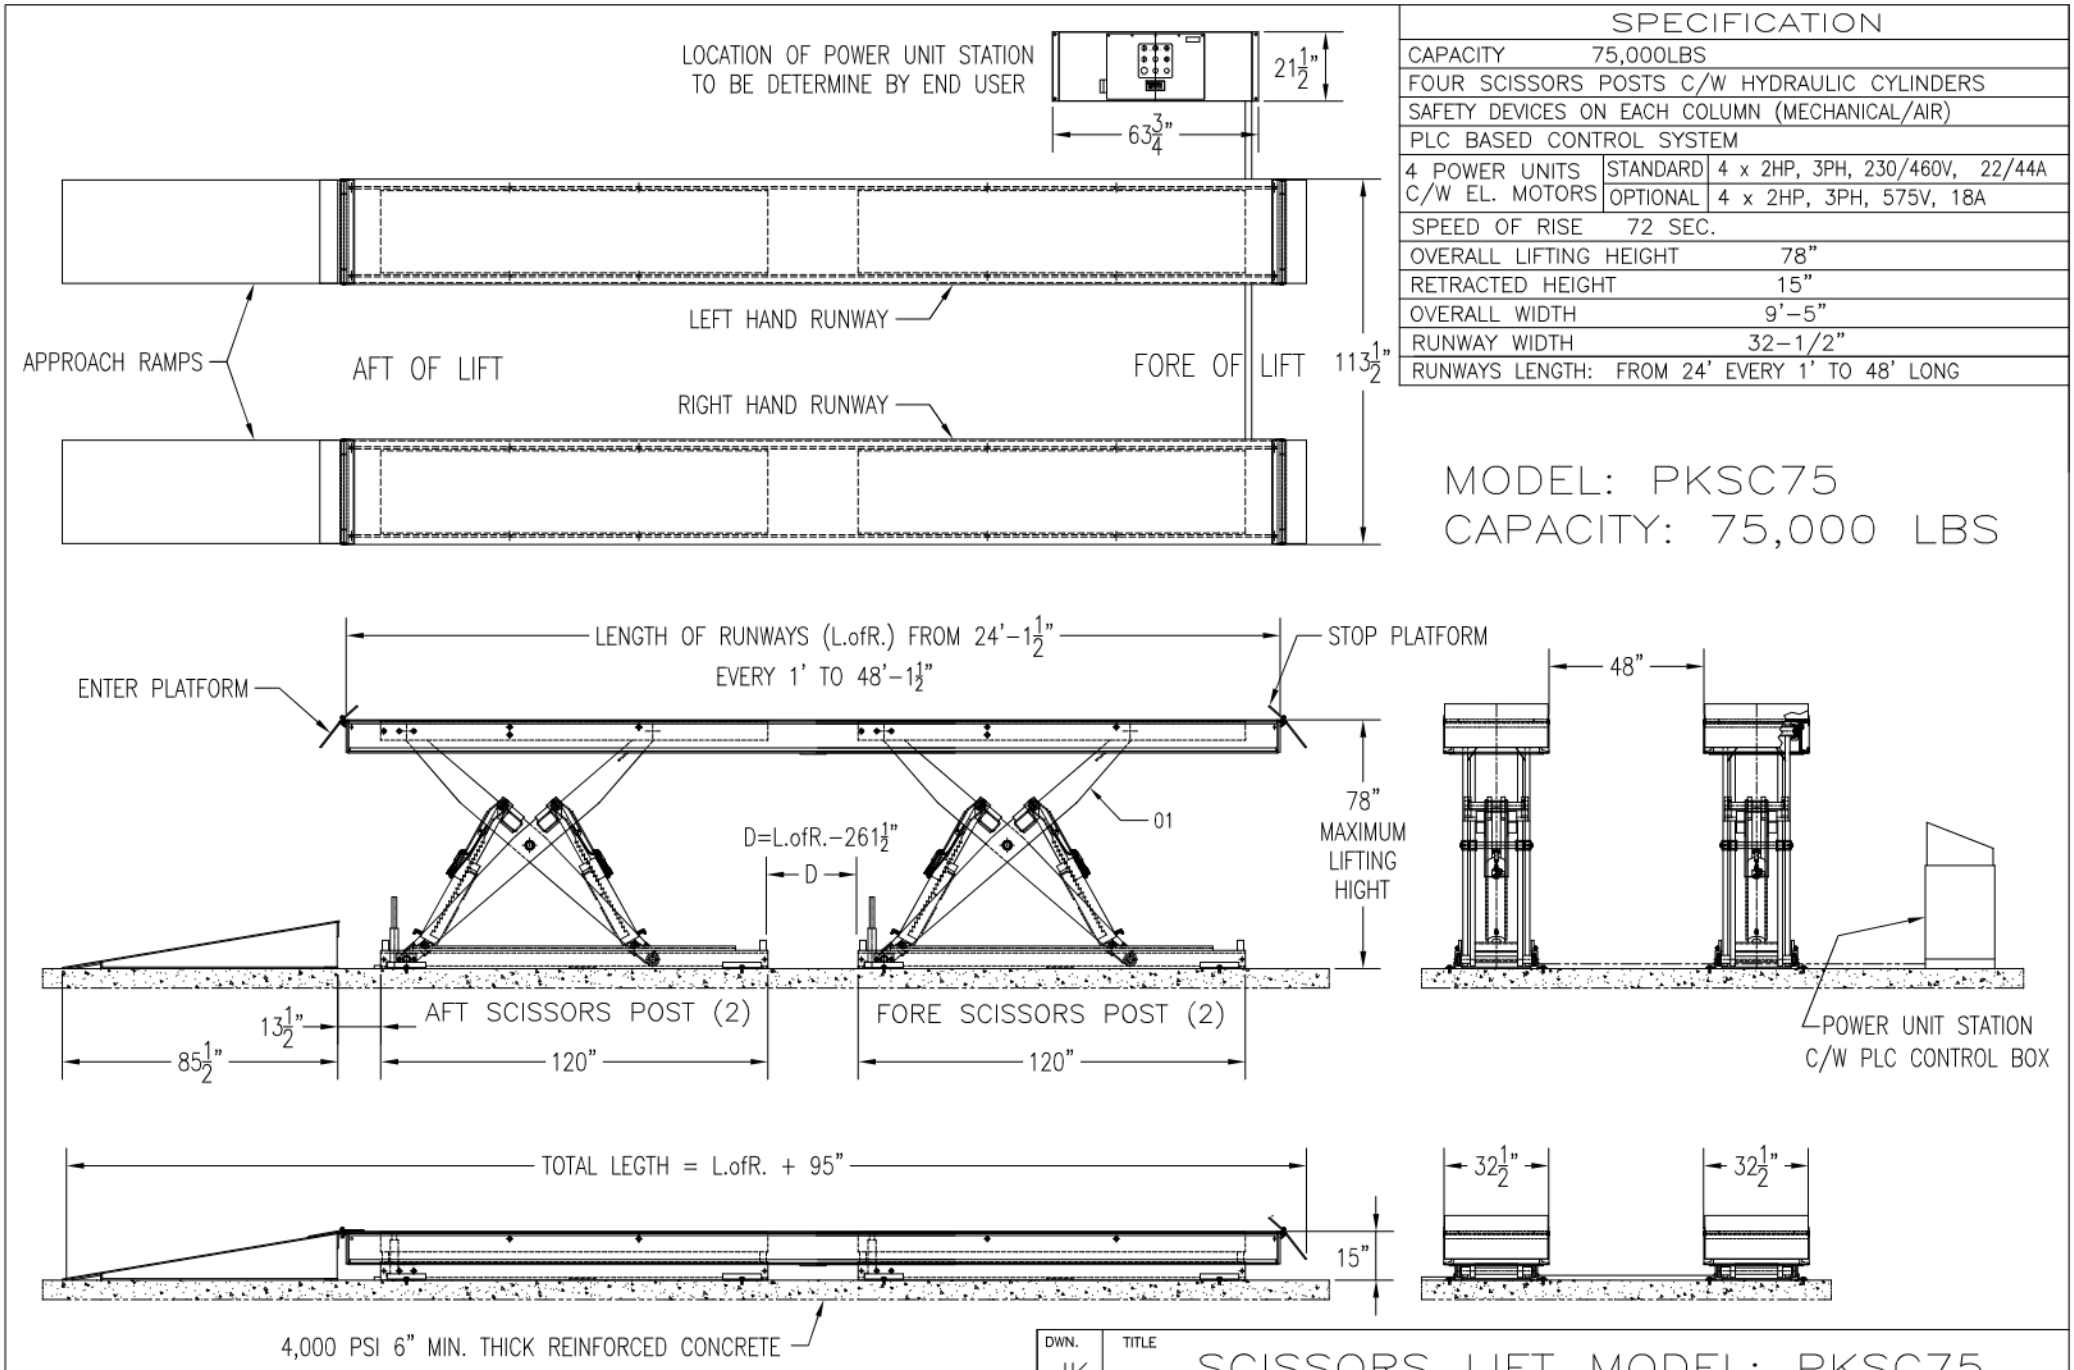


SPECIFICATION		
CAPACITY	75,000LBS	
FOUR SCISSORS POSTS C/W HYDRAULIC CYLINDERS		
SAFETY DEVICES ON EACH COLUMN (MECHANICAL/AIR)		
PLC BASED CONTROL SYSTEM		
4 POWER UNITS C/W EL. MOTORS	STANDARD	4 x 2HP, 3PH, 230/460V, 22/44A
	OPTIONAL	4 x 2HP, 3PH, 575V, 18A
SPEED OF RISE	72 SEC.	
OVERALL LIFTING HEIGHT	78"	
RETRACTED HEIGHT	15"	
OVERALL WIDTH	9'–5"	
RUNWAY WIDTH	32–1/2"	
RUNWAYS LENGTH:	FROM 24' EVERY 1' TO 48' LONG	

MODEL: PKSC75
CAPACITY: 75,000 LBS


NOTE: DRAWING NOT TO SCALE.

DWN.	TITLE			
JK	SCISSORS LIFT MODEL: PKSC75			
APPR. KK	P K S	AUG.26/2013	DWG PKSC75–FIG.01	A

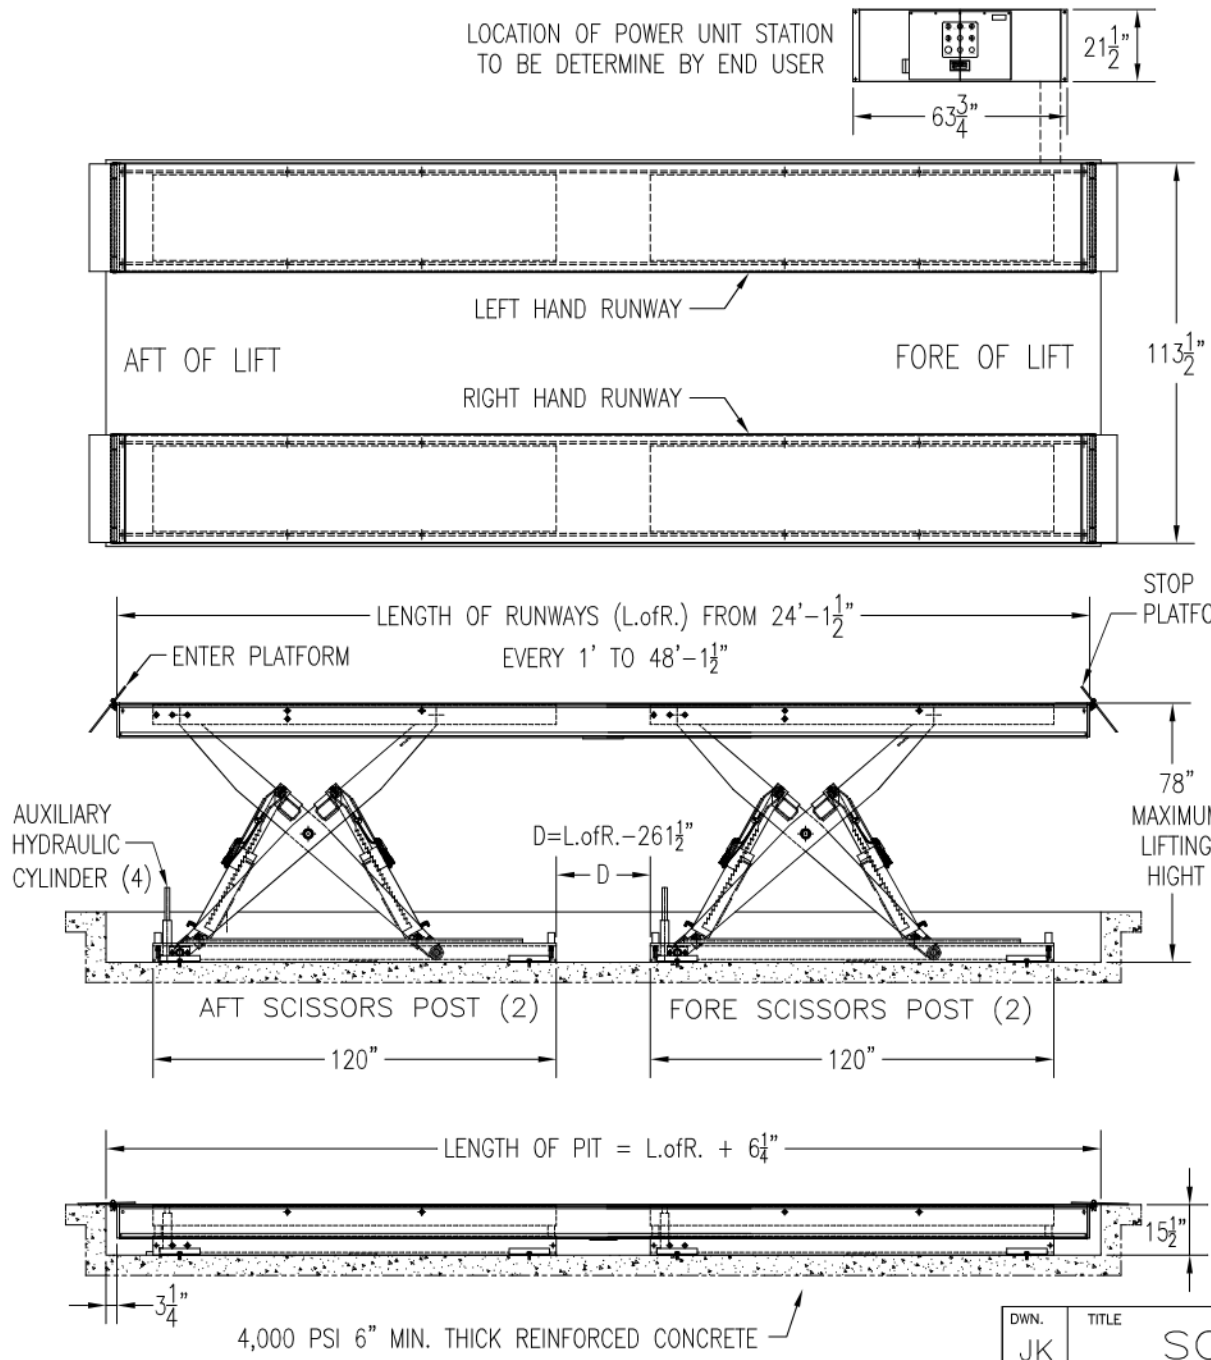


SPECIFICATION		
CAPACITY	75,000LBS	
FOUR SCISSORS POSTS C/W HYDRAULIC CYLINDERS		
SAFETY DEVICES ON EACH COLUMN (MECHANICAL/AIR)		
PLC BASED CONTROL SYSTEM		
4 POWER UNITS C/W EL. MOTORS	STANDARD	4 x 2HP, 3PH, 230/460V, 22/44A
	OPTIONAL	4 x 2HP, 3PH, 575V, 18A
SPEED OF RISE	72 SEC.	
OVERALL LIFTING HEIGHT	78"	
RETRACTED HEIGHT	15"	
OVERALL WIDTH	9'–5"	
RUNWAY WIDTH	32–1/2"	
RUNWAYS LENGTH:	FROM 24' EVERY 1' TO 48' LONG	

MODEL: PKSC75R
CAPACITY: 75,000 LBS

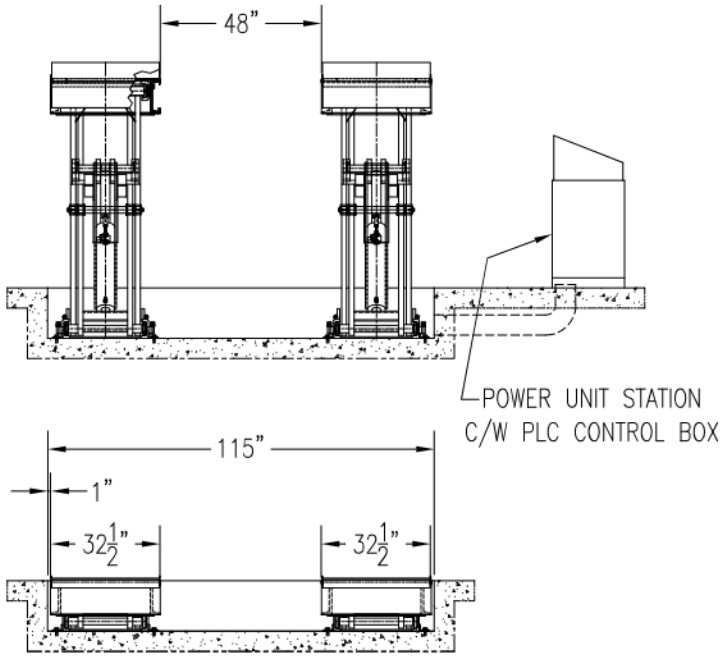

NOTE: DRAWING NOT TO SCALE.

DWN.	TITLE			
JK	SCISSORS LIFT MODEL: PKSC75R			
APPR.			DWG	
KK	P K S	AUG.26/2013	PKSC75R–FIG.01	A

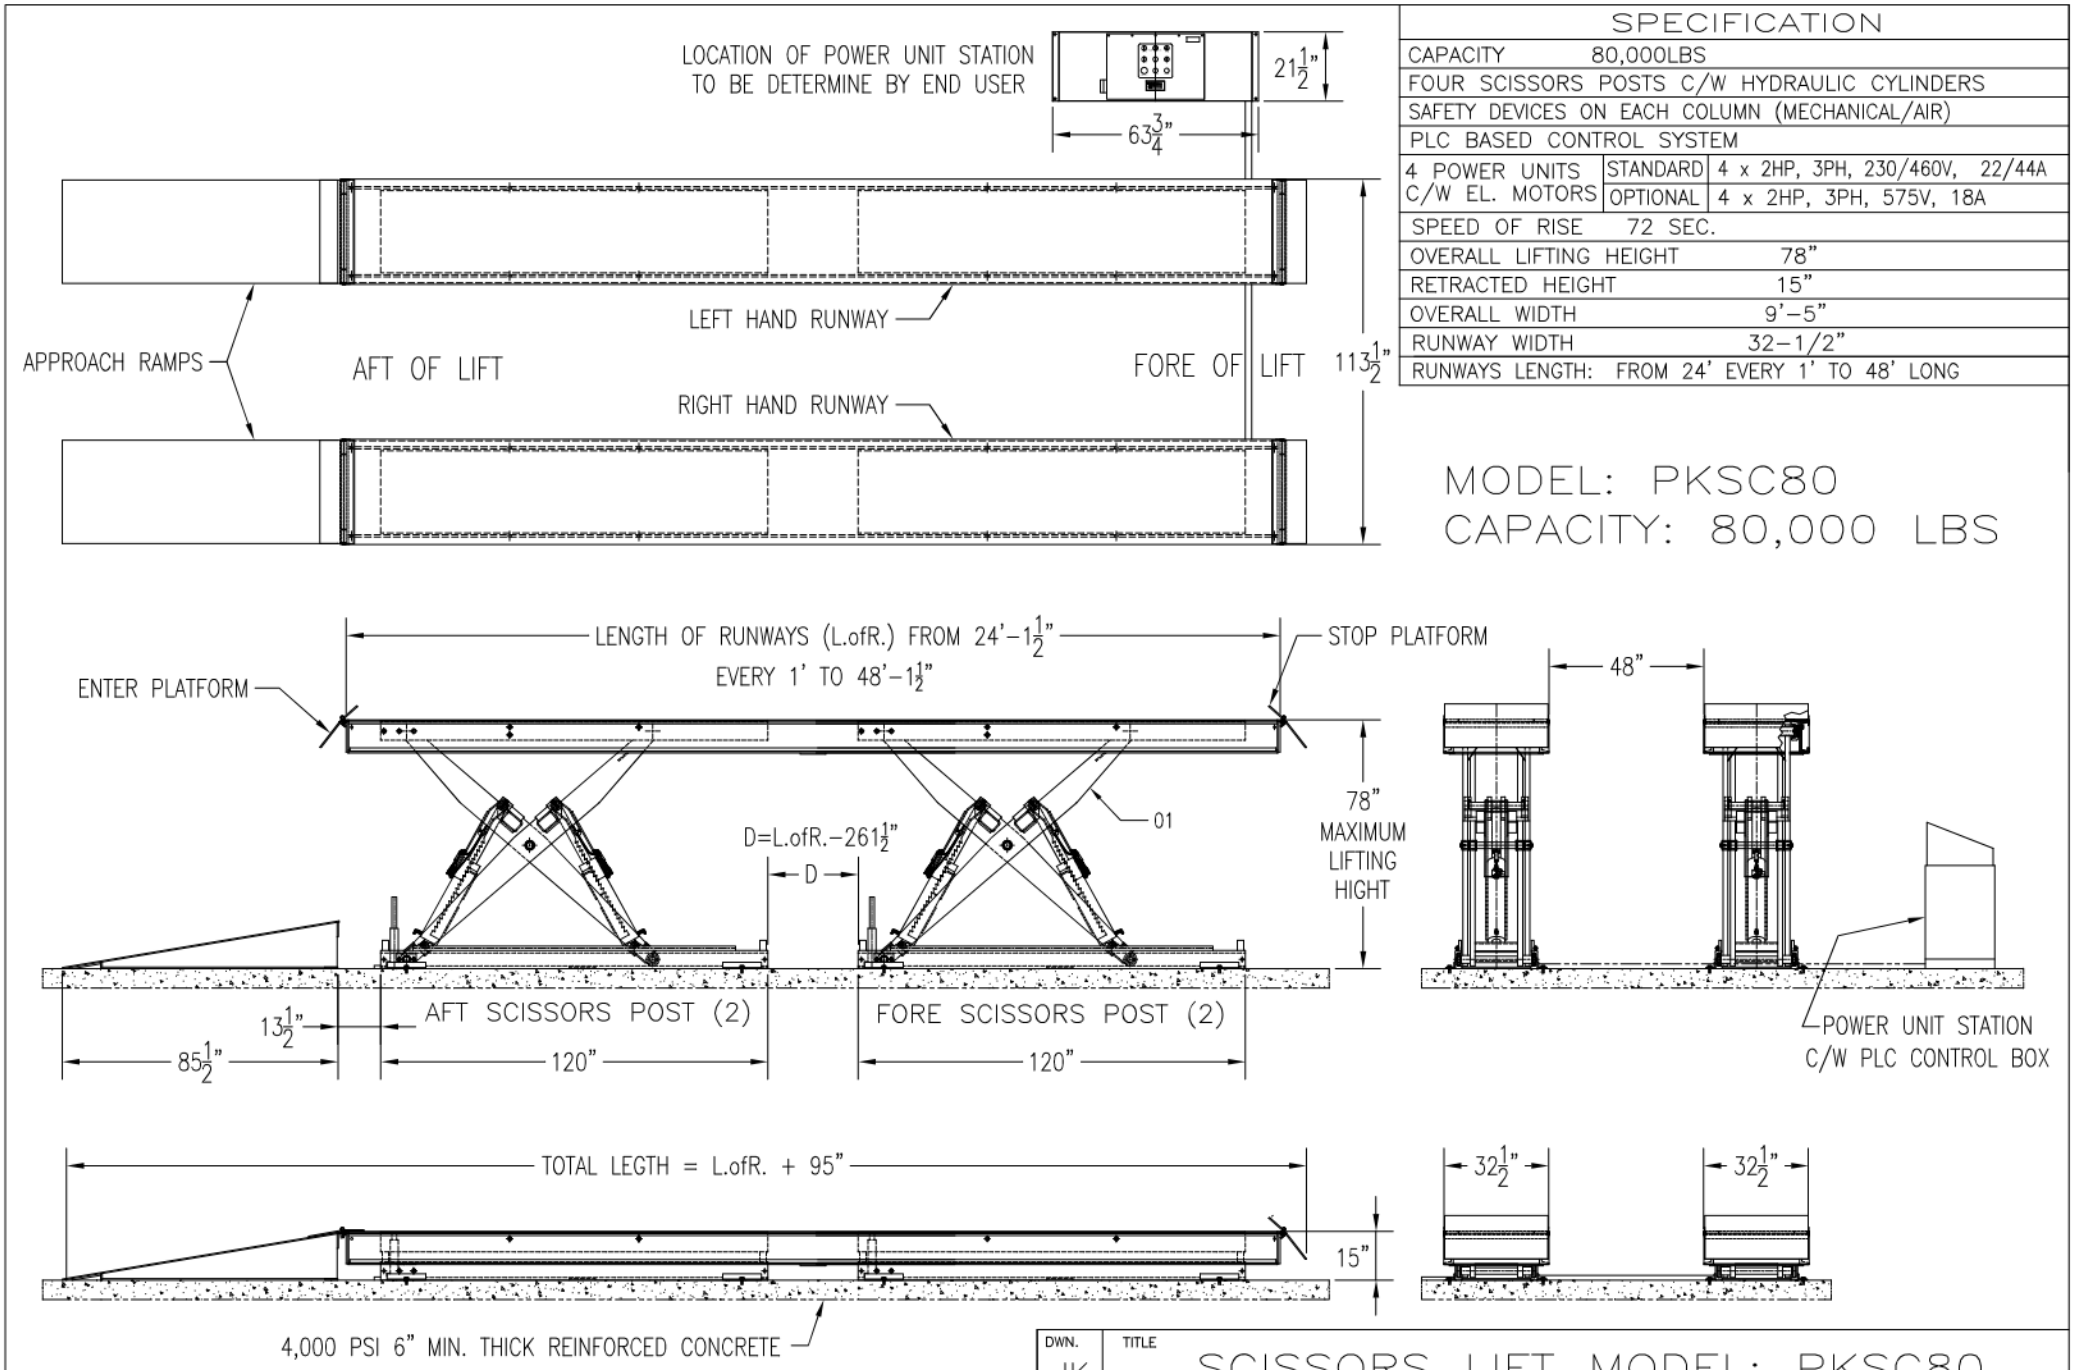


SPECIFICATION		
CAPACITY	80,000LBS	
FOUR SCISSORS POSTS C/W HYDRAULIC CYLINDERS		
SAFETY DEVICES ON EACH COLUMN (MECHANICAL/AIR)		
PLC BASED CONTROL SYSTEM		
4 POWER UNITS C/W EL. MOTORS	STANDARD	4 x 2HP, 3PH, 230/460V, 22/44A
	OPTIONAL	4 x 2HP, 3PH, 575V, 18A
SPEED OF RISE	72 SEC.	
OVERALL LIFTING HEIGHT	78"	
RETRACTED HEIGHT	15"	
OVERALL WIDTH	9'–5"	
RUNWAY WIDTH	32–1/2"	
RUNWAYS LENGTH:	FROM 24' EVERY 1' TO 48' LONG	

MODEL: PKSC80
CAPACITY: 80,000 LBS


NOTE: DRAWING NOT TO SCALE.

DWN.	TITLE			
JK	SCISSORS LIFT MODEL: PKSC80			
APPR. KK	P K S	AUG.26/2013	DWG PKSC80–FIG.01	A

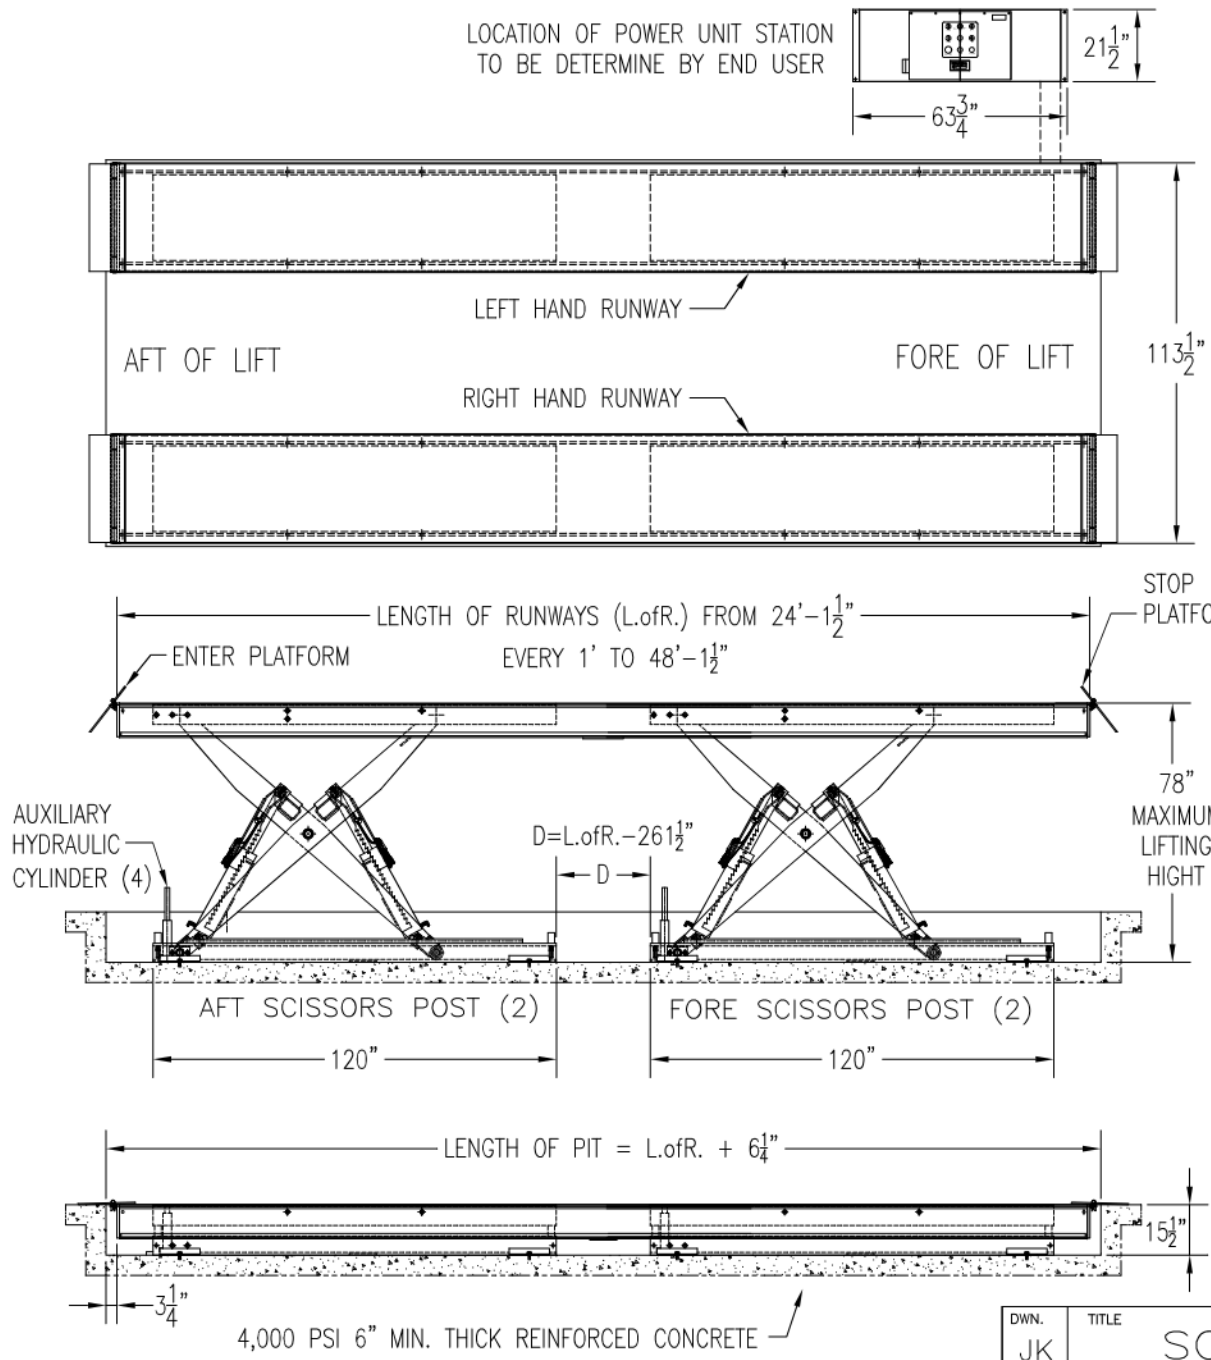

SPECIFICATION		
CAPACITY	80,000LBS	
FOUR SCISSORS POSTS C/W HYDRAULIC CYLINDERS		
SAFETY DEVICES ON EACH COLUMN (MECHANICAL/AIR)		
PLC BASED CONTROL SYSTEM		
4 POWER UNITS C/W EL. MOTORS	STANDARD	4 x 2HP, 3PH, 230/460V, 22/44A
	OPTIONAL	4 x 2HP, 3PH, 575V, 18A
SPEED OF RISE	72 SEC.	
OVERALL LIFTING HEIGHT	78"	
RETRACTED HEIGHT	15"	
OVERALL WIDTH	9'–5"	
RUNWAY WIDTH	32–1/2"	
RUNWAYS LENGTH:	FROM 24' EVERY 1' TO 48' LONG	

MODEL: PKSC80R
CAPACITY: 80,000 LBS

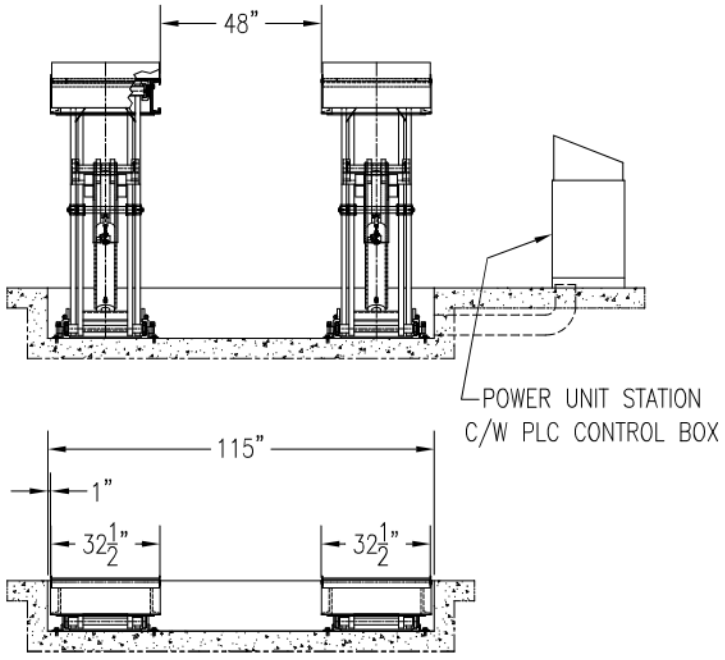

NOTE: DRAWING NOT TO SCALE.

DWN.	TITLE			
JK	SCISSORS LIFT MODEL: PKSC80R			
APPR.			DWG	
KK	P K S	AUG.26/2013	PKSC80R–FIG.01	A

TELEMET
Efficiency Through Simplicity™

Advice, spare parts and service

Telemet · Office in Chile

Los Canteros 8723, La Reina, Santiago 7880414, Chile

Phone +56 22 356 2735

info@telemet.com

telemet.com