
MODEL 4852 KODIAK SELF CONTAINED LOADER MOUNT

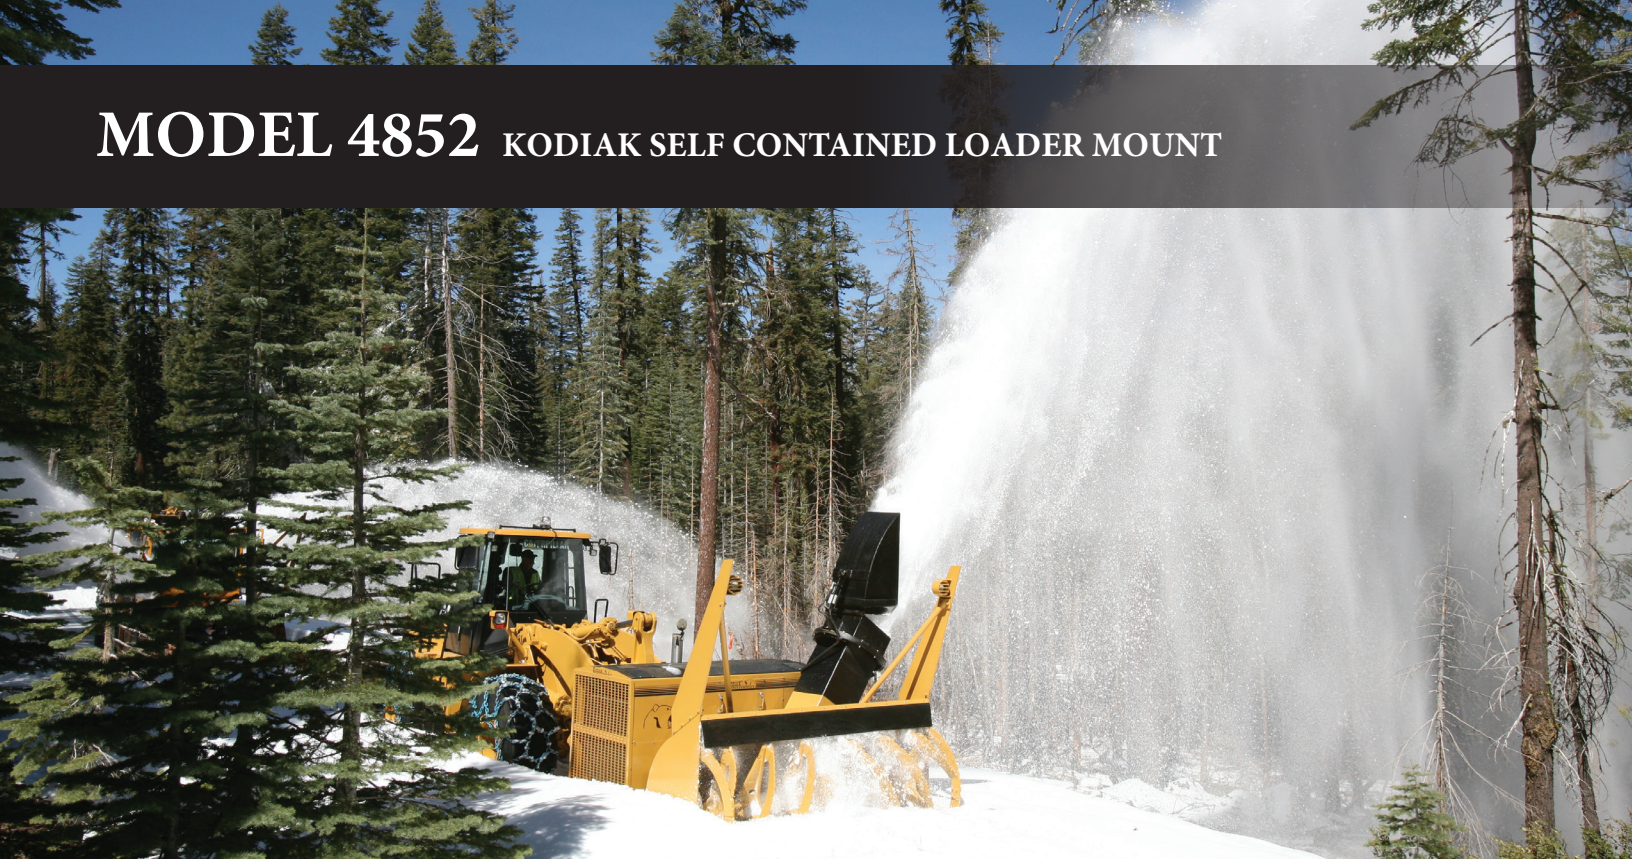

Nothing Can Stand Up To a KODIAK

ENGINE
Tier IV
500-675 hp

CAPACITY
Up to 5,500 tph (tons per hour)

CUTTING WIDTH
120-132 inches

INPUT REEL SIZE
52 inches

CASTING DISTANCE
Up to 150 feet

STRUCTURAL
Hardox, A36 & T-1 Steel

STANDARD ITEMS
Engine Block Heater
Two-stage air cleaner

Wired control panel for loader
Scrapper Blade
Right/Left casting through
145 degrees
Steel Engine Cover
Gear Boxes (self lubricating)
Serrated Ribbons
Skid Shoes
Shear Pin Protected
Automotive Self Adjusting Clutch

OPTIONS
Truck Loading Spot Casting Chute
Wireless Remote Controls
Quick Hitch
Optional rear mounted engine for
weigh balance.
Kodiak Extreme Polar Package

Engine Make	**Cummins, CAT, John Deere, FTP**
Horsepower	500 -675 Hp Class Turbo Diesel
Ribbon	48”
Cutting Height	67”
Impeller	52”
Drum Depth	20”
Plow Width	120" (132" Optional)
Weight	**19,000 lbs**
Height	**88 (cutter bars 102)**

www.kodiakamerica.us

KODIAK AMERICA

307 S. Warm Springs Way
Heyburn, Idaho 83336 USA

Tel: 208-931-1498
Email: sales@kodiakamerica.us
E-mail: parts@kodiakamerica.us

TELEMET
Efficiency Through Simplicity™

Advice, spare parts and service

Telemet · Office in Chile

Los Canteros 8723, La Reina, Santiago 7880414, Chile

Phone +56 22 356 2735

info@telemet.com

telemet.com