
BOSSTEK

Elevate any sized dust control cannon with a carbon steel, hot dip galvanized tower mount. Using the added height, extend the atomized misting plume and create a ceiling that catches fugitive dust trying to escape into the air.

DUSTBOSS® TOWER

STANDARD FEATURES

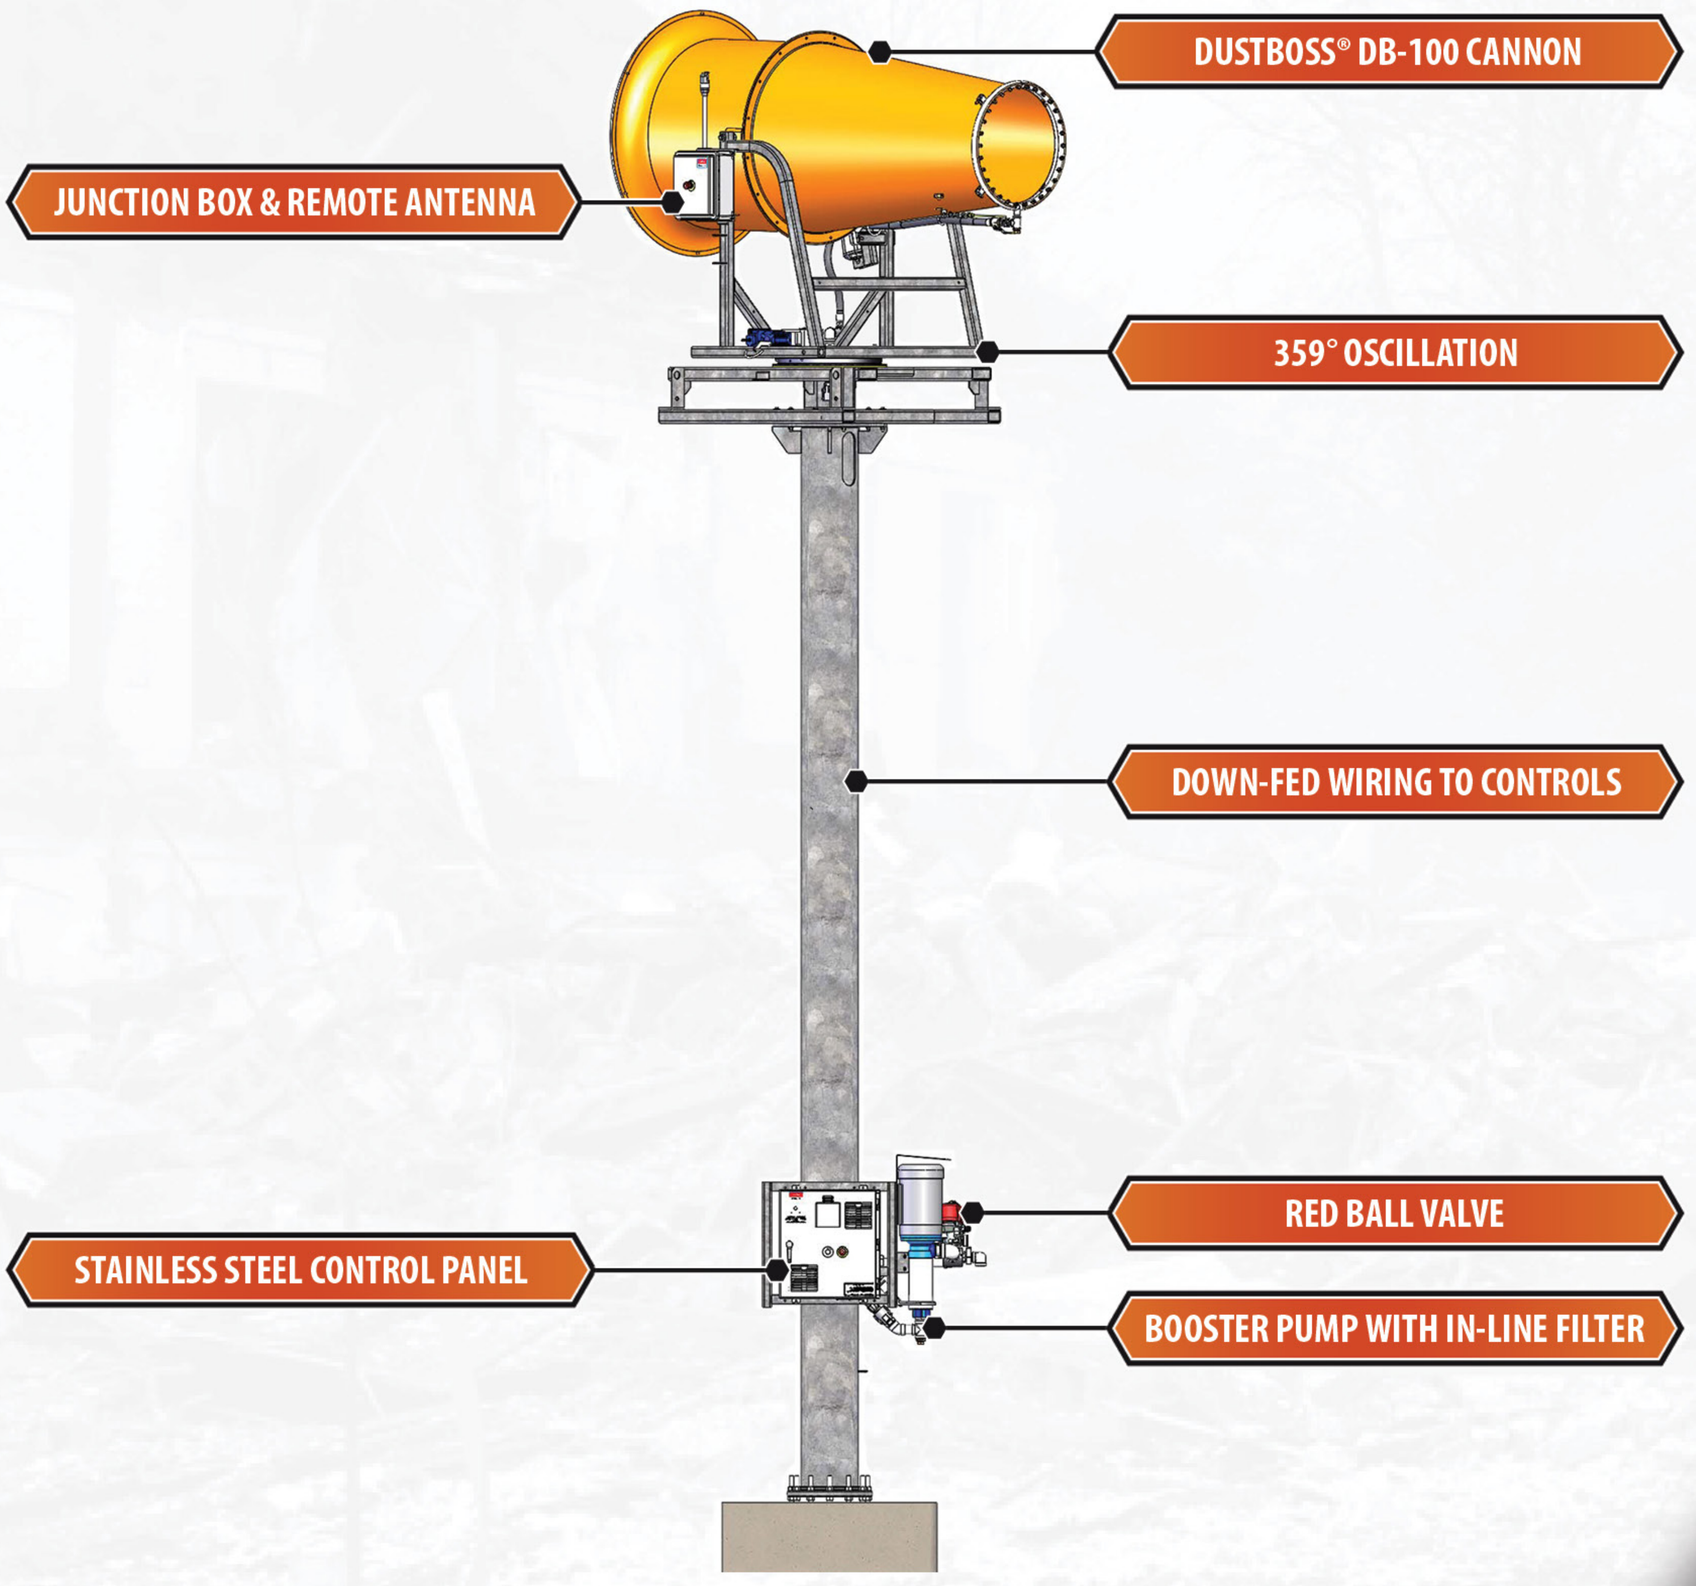

TOWER SYSTEM

FULLY CUSTOMIZABLE TO YOUR UNIQUE NEEDS, DUSTBOSS® TOWERS ARE TAILORED TO YOUR JOB SITE. TOWERS PROVIDE COVERAGE ANYWHERE NEAR THE SYSTEM USING PROGRAMMABLE, 359° OSCILLATION. A PERFECT SOLUTION TO REOCCURING, DUST-GENERATING ACTIVITIES.

DUSTBOSS EQUIPMENT IS BUILT TO WITHSTAND THE HARSHEST JOB SITES WITH OUR FIRST UNITS STILL ACTIVE MORE THAN 15 YEARS LATER! WE STAND BEHIND OUR QUALITY EQUIPMENT AND KNOW IT WILL LAST FOR YEARS TO COME. BACKING OUR BELIEF, WE OFFER A 3 YEAR, 3,000 HOUR WARRANTY FOR DUSTBOSS TOWER SYSTEMS.



TOWER SYSTEM

SPECIFICATIONS

GENERAL SPECIFICATIONS

- Cannons available: DB-30, DB-45, DB-60, DB-100.
- Oscillation: standard 359°.
- Adjustable throw angle: 0° - 50° pitch.
- Nozzles: 30 brass (also available in stainless and nylon).
- Droplet size: 50 - 200 microns.
- Premium efficiency direct-drive motor.

AVAILABLE TOWER HEIGHTS		
Size 1	**Size 2**	**Size 3**
8.00 ft	15.50 ft	20.00 ft
96.00 in	117.00 in	240.00 in
2.44 m	4.72 m	6.10 m

CANNON SPECIFICATIONS

- See individual cannon spec sheets for water, electrical, noise and maintenance specifications.

OPTIONS

- DustBoss® deluxe remotes.
- Wind sensors.
- Booster pumps.
- Non-potable water filter solutions.
- Variable frequency drive (VFD) for adjustable fan throw distance.
- Quick release manifold for easy manifold and nozzle removal.
- Injektor™ dosing system available for additive dispersion.



DUSTBOSS® DELXUE REMOTE



WARRANTY

CANNON: 3 YEAR / 3,000 HOUR

TELEMET
Efficiency Through Simplicity™

Advice, spare parts and service

Telemet · Office in Chile

Los Canteros 8723, La Reina, Santiago 7880414, Chile

Phone +56 22 356 2735

info@telemet.com

telemet.com