PW **12** C One Chassis. Many possibilities.



Payload **13,200 kg | 29,100 lbs**	Ground pressure **0.22 kg/cm² | 3.12 psi**	Fording depth **1,300 mm | 51.2"**
Tare weight **13,140 kg | 28,900 lbs**	Max. speed **14.5 km/h | 9.0 mph**	Gradeability **60 %** uphill & downhill **40 %** sidehill

PRODUCT KEY FEATURES

- Master of versatility: In the most challenging conditions, wherever your job takes you, PowerBully is at home. Our off-road vehicles with payloads from 9,000 - 16,600 kg (19,900 to 36,600 lbs) bring people, eqiupment and material safely and reliably to any job site.
- No limitations: Thanks to its off-road driving potential, PowerBully masters uneven terrain, mud, swamps and obstacles with ease.
- Safely and comfortable: Large windows combined with a 360° camera system and premium LED lighting provide the operator with optimal visibility. The cab suspension and large wheels provide a smooth ride through rough terrain.

ENGINE & POWER

Type	Cummins B6.7 Turbo Diesel	
No. of cylinders	6	
Displacement	6.7 l	6,700 ccm
Power Output @ 2,000 rpm	209 kW	285 hp
Max. Torque @ 1.500 rpm	1,288 Nm	950 ft lb
Emission standard	EU Stage V	Tier 4f
Drive Train	Hydrostatic Bosch Rexroth drive train	

CHASSIS

Track type	Endless rubber track	
Track width	750 mm	29.5"
Frame type	C-shaped profile	
Frame width	864 mm	
Wheels	8 steel wheels	
Walking beam		
Automatic track tensioning		
Ground pressure (empty)	0.22 kg/cm²	3.12 psi
Ground pressure (loaded)	0.44 kg/cm²	6.25 psi

TANK VOLUMES

Diesel	250 l	66 gal
AdBlue	38 l	10 gal
Hydraulic oil	52 l	14 gal

ILLUMINATION


- 6 LED working lights front and rear

CABIN

- Suspended cab 1,412 mm width
- ROPS / FOPS (Level I & II) certified
- Single-hand joystick operation
- Adjustable operator's seat
- 2 axis inclination sensor
- Rear view camera
- 10.4" Touch Display
- Armrest with controls
- Heating, temperature and fan control
- Air conditioning
- 12 V power outlet
- 2 USB charging ports (type A and C)
- Mobile phone tray
- Sun blind
- Air-conditioned cup holder
- Limp home mode

PowerBully®

PW 12 C

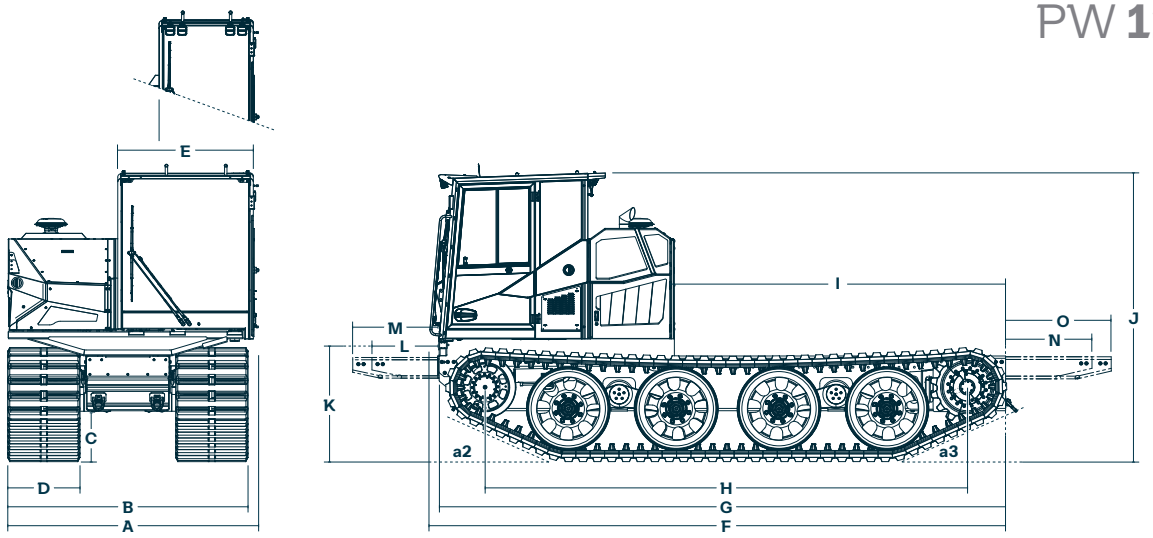


DIMENSIONS

A	2,590 mm	102"	D	750 mm	29.5"	G	5,900 mm	232.3"	J	3,005 mm	118"	M	900 mm	35.4"	
B	2,500 mm	98"	E	1,412 mm	55.6"	H	5,021 mm	198"	K	1,300 mm	51.2"	N	900 mm	35.4"	
C	530 mm	21"	F	6,036 mm	237.6"	I	3,450 mm	135.8"	L	700 mm	27.6"	O	1,100 mm	43.3"	

Optional: Narrow cab E 982 mm | 39 "

ANGLES

a2	24°
a3	26°

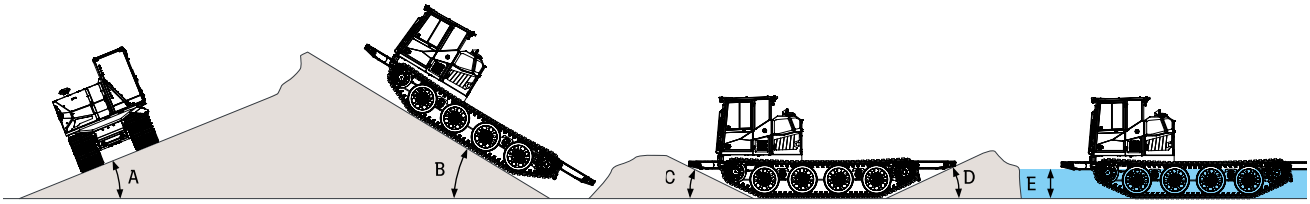

OFF-ROAD ABILITIES

A Sidehill	40 % | 22°	C Approach angle with	700 mm | 27.6" frame extension	28°	D Departure angle with	900 mm | 35.4" frame extension	29°
B Uphill / Downhill	60 % | 31°		900 mm | 35.4" frame extension	24°		1,100 mm | 43.3" frame extension	24°
E Fording depth	1,300 mm | 51.2"						

INTERFACES

PTO for attachments	
Power	126 kW (600 Nm)
Rotation speed	828 – 2,367 rpm
Transmission	1 : 0.845

Mechanical		
Frame type	C-shaped profile with pre-drilled hole patterns	
Frame width	864 mm	34"

Electrical	
Power supply for attachments	12 V or 24 V
Attachment interface	

OPTIONS

Safety
Premium LED working lights
Beacon light
Auxiliary lights (High and low beam, rear light, indicators)
360° camera (on request)
Foldable front protective grid
FOPS level II protective grid
Hydraulic winch (Tractive force: 11 t | 24,251 lbs)

Comfort
Air suspended comfort seat
Adjustable steering wheel
Heated, electrically adjustable mirrors
Radio with bluetooth and a hands-free kit

Cold start
Heated fuel filter
Feeder pressure reduction
Engine block heater 230 V / 110 V
Electrical Hydraulic Oil Heating 230 V / 110 V
Auxiliary heating

Other
Telematics
Reversible fan
Frame extension (front) 700 – 900 mm | 27.6" – 35.4"
Frame extension (rear) 900 – 1,100 mm | 35.4" – 43.3"
Narrow cab
Trailer coupling
Air-intake in steel-version
Cyclonic pre-separator for air intake

Subject to change in the course of technical development. The images shown are for illustration purposes only and may may contain optional extras.

TELEMET
Efficiency Through Simplicity™

Advice, spare parts and service

Telemet · Office in Chile

Los Canteros 8723, La Reina, Santiago 7880414, Chile

Phone +56 22 356 2735

info@telemet.com

telemet.com