PW 9 D

The Reliable Dumper.



Payload
7,500 kg | 16,500 lbs

Ground pressure
0.22 kg/cm² | 3.12 psi

Fording depth
1,200 mm | 47.2"

Tare weight
12,450 kg | 27,400 lbs

Capacity heaped
5.2 m³ | 6.8 yd³ (ISO 6483)

Gradeability
60 % uphill & downhill
40 % sidehill

Max. speed
14.5 km/h | 9.0 mph

PRODUCT KEY FEATURES

- Transport miracle: High payloads and large loading volumes enable the transport of up to 7.5 tons of soil, rocks or other material!
- No limitations: Thanks to its off-road driving potential, PowerBully masters uneven terrain, mud, swamps and obstacles with ease.
- Safely and comfortable: Large windows combined with a 360° camera system and premium LED lighting provide the operator with optimal visibility. The cab suspension and large wheels provide a smooth ride through rough terrain.

ENGINE & POWER

Type	Cummins B6.7 Turbo Diesel	
No. of cylinders	6	
Displacement	6.7 l	6,700 ccm
Power Output @ 2,000 rpm	173 kW	235 hp
Max. Torque @ 1.500 rpm	949 Nm	700 ft lb
Emission standard	EU Stage V	Tier 4f
Drive Train	Hydrostatic Bosch Rexroth drive train	

CHASSIS

Track type	Endless rubber track	
Track width	700 mm	27.6"
Frame type	C-shaped profile	
Frame width	864 mm	34"
Wheels	8 steel wheels	
Walking beam		
Automatic track tensioning		
Ground pressure (empty)	0.22 kg/cm²	3.12 psi
Ground pressure (loaded)	0.35 kg/cm²	4.97 psi

TANK VOLUMES

Diesel	250 l	66 gal
AdBlue	38 l	10 gal
Hydraulic oil	52 l	14 gal

ILLUMINATION


6 LED working lights front and rear

CABIN

- Suspended cab 1,412 mm width
- ROPS / FOPS (Level I & II) certified
- Single-hand joystick operation
- Adjustable operator's seat
- 2 axis inclination sensor
- Rear view camera
- 10.4" Touch Display
- Armrest with controls
- Heating, temperature and fan control
- Air conditioning
- 12 V power outlet
- 2 USB charging ports (type A and C)
- Mobile phone tray
- Sun blind
- Air-conditioned cup holder
- Limp home mode

PowerBully®

PW 9 D

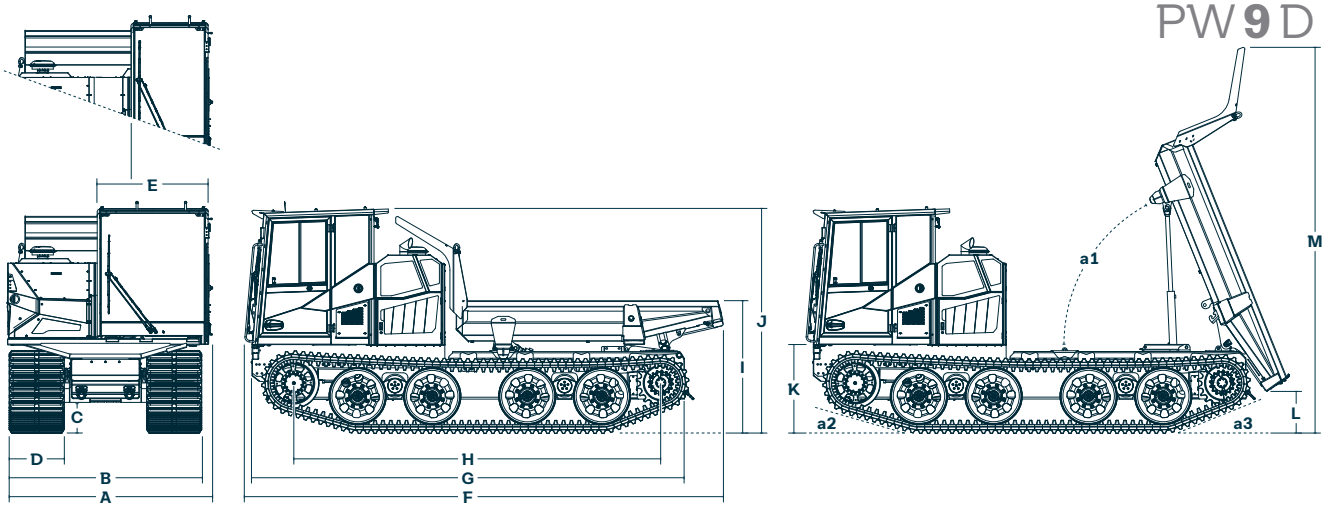

DIMENSIONS


A	2,590 mm	102"	D	700 mm	27.6"	G	5,500 mm	217"	J	2,857 mm	112"	M	4,912 mm	193"
B	2,450 mm	96"	E	1,412 mm	55.6"	H	4.672 mm	184"	K	1,200 mm	47.2"			
C	390 mm	15.4"	F	6,091 mm	240"	I	1,689 mm	66.5"	L	536 mm	21"			

Optional: Narrow cab E 982 mm | 39"

Optional: Frame extension front 500 mm | 19.7" or 700 mm | 27.6"

ANGLES

a1	68°
a2	16°
a3	22°

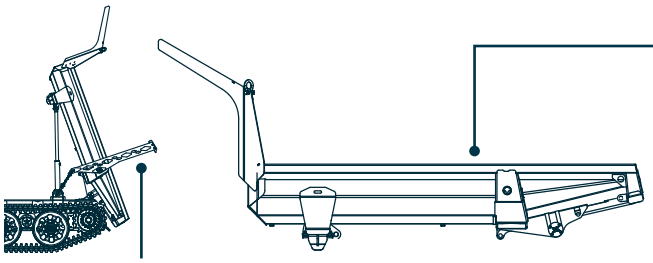


Optional: Dump box with mechanical tailgate

HARDOX DUMP BOX / AUTOMATIC LOWERING

Capacity heaped (ISO 6483)	5.2 m³*	6.8 yd³*
Capacity leveled	3.2 m³*	4.2 yd³*
Length	3,400 mm	134"
Width	2,444 mm	96"
Side wall height	512 mm	20.1"

* Applies for dump box with mechanical tailgate

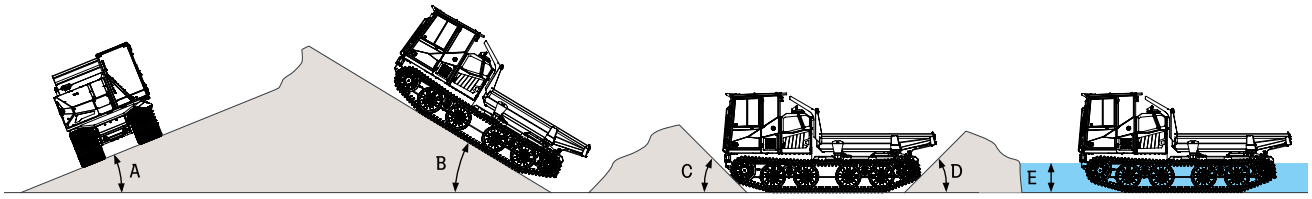

OFF-ROAD ABILITIES

A Sidehill	40 % | 22°	B Uphill | Downhill	60 % | 31°	C Approach angle	45°	D Departure angle	45°	E Fording depth	1,200 mm | 47.2"

Approach and departure angles deviating with frame extensions

OPTIONS

Safety	Comfort	Cold start	Other
Premium LED working lights	Air suspended comfort seat	Heated fuel filter	Telematics
Beacon light	Adjustable steering wheel	Feeder pressure reduction	Reversible fan
Auxiliary lights (High and low beam, rear light, indicators)	Heated, electrically adjustable mirrors	Engine block heater 230V/110V	Frame extension (front) 500 or 700 mm | 19.7" – 27.6"
360° camera (on request)	Radio with bluetooth and a hands-free kit	Electrical Hydraulic Oil Heating 230V/110V	Narrow cab
Foldable front protective grid		Auxiliary heating	Trailer coupling
FOPS level II protective grid			Air-intake in steel-version
Hydraulic winch (Tractive force: 9 t | 19,000 lbs)			Cyclonic pre-separator for air intake

Subject to change in the course of technical development. The images shown are for illustration purposes only and may contain optional extras.

TELEMET
Efficiency Through Simplicity™

Advice, spare parts and service

Telemet · Office in Chile

Los Canteros 8723, La Reina, Santiago 7880414, Chile

Phone +56 22 356 2735

info@telemet.com

telemet.com