PW **12** D

The Reliable Dumper.



Payload
11,500 kg | 25,400 lbs

Ground pressure
0.24 kg/cm² | 3.41 psi

Fording depth
1,300 mm | 51.2"

Tare weight
15,200 kg | 33,510 lbs

Capacity heaped
6.7 m³ | 8.8 yd³ (ISO 6483)

Gradeability
60 % uphill & downhill
40 % sidehill

Max. speed
14.5 km/h | 9.0 mph

PRODUCT KEY FEATURES

- Transport miracle: High payloads and large loading volumes enable the transport of up to 11.5 tons of soil, rocks or other material!
- No limitations: Thanks to its off-road driving potential, Power-Bully masters uneven terrain, mud, swamps and obstacles with ease.
- Safely and comfortable: Large windows combined with a 360° camera system and premium LED lighting provide the operator with optimal visibility. The cab suspension and large wheels provide a smooth ride through rough terrain.

ENGINE & POWER

Type	Cummins B6.7 Turbo Diesel	
No. of cylinders		6
Displacement	6.7 l	6,700 ccm
Power Output @ 2,000 rpm	209 kW	285 hp
Max. Torque @ 1.500 rpm	1,288 Nm	950 ft lb
Emission standard	EU Stage V	Tier 4f
Drive Train	Hydrostatic Bosch Rexroth drive train	

CHASSIS

Track type	Endless rubber track	
Track width	750 mm	29.5"
Frame type	C-shaped profile	
Frame width	864 mm	34"
Wheels	8 steel wheels	
Walking beam		
Automatic track tensioning		
Ground pressure (empty)	0.24 kg/cm²	3.41 psi
Ground pressure (loaded)	0.44 kg/cm²	6.25 psi

TANK VOLUMES

Diesel	250 l	66 gal
AdBlue	38 l	10 gal
Hydraulic oil	52 l	14 gal

ILLUMINATION


6 LED working lights front and rear

CABIN

Suspended cab 1,412 mm width	2 axis inclination sensor	Heating, temperature and fan control	Mobile phone tray
ROPS / FOPS (Level I & II) certified	Rear view camera	Air conditioning	Sun blind
Single-hand joystick operation	10.4" Touch Display	12 V power outlet	Air-conditioned cup holder
Adjustable operator's seat	Armrest with controls	2 USB charging ports (type A and C)	Limp home mode

PowerBully®

PW 12 D

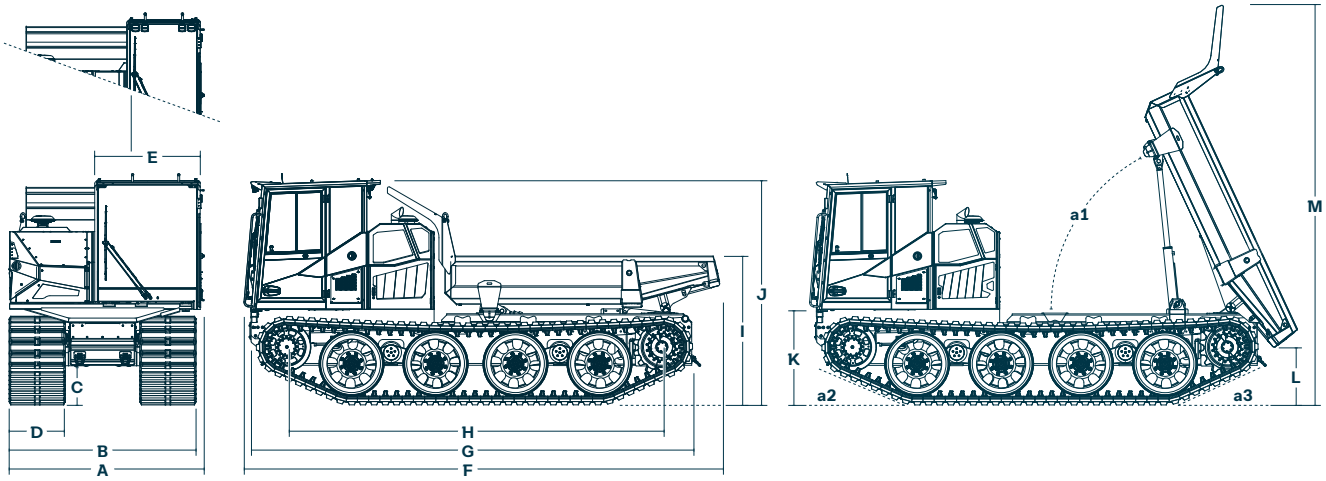

DIMENSIONS


A	2,590 mm	102"	D	750 mm	29.5"	G	5,900 mm	232.3"	J	3,005 mm	118"	M	5,314 mm	209"
B	2,500 mm	98"	E	1,412 mm	55.6"	H	5,021 mm	198"	K	1,300 mm	51.2"			
C	532 mm	21"	F	6,375 mm	250"	I	1,992 mm	78.4"	L	805 mm	31.7"			

Optional: Narrow cab E 982 mm | 39"

Optional: Frame extension front 700 mm | 27.6" or 900 mm | 35.4"

ANGLES

a1	58°
a2	24°
a3	26°

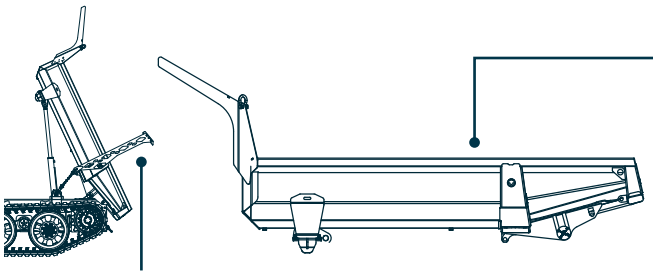


Optional: Dump box with mechanical tailgate

HARDOX DUMP BOX / AUTOMATIC LOWERING

Capacity heaped (ISO 6483)	6.7 m³*	8.8 yd³*
Capacity leveled	4.4 m³*	5.8 yd³*
Length	3,683 mm	145"
Width	2,444 mm	96"
Side wall height	652 mm	25.7"

*** Applies for dump box with mechanical tailgate**

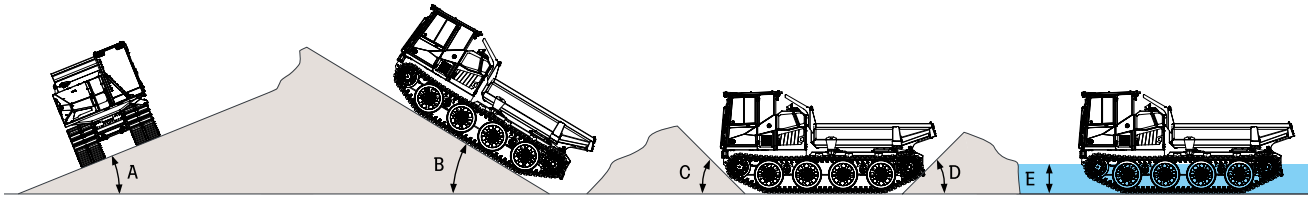

OFF-ROAD ABILITIES

A	Sidehill	40 % | 22°	B	Uphill | Downhill	60 % | 31°	C	Approach angle	45°	D	Departure angle	45°	E	Fording depth	1,300 mm | 51.2"

Approach and departure angles deviating with frame extensions

OPTIONS

Safety	Comfort	Cold start	Other
Premium LED working lights	Air suspended comfort seat	Heated fuel filter	Telematics
Beacon light	Adjustable steering wheel	Feeder pressure reduction	Reversible fan
Auxiliary lights (High and low beam, rear light, indicators)	Heated, electrically adjustable mirrors	Engine block heater 230 V / 110 V	Frame extension (front) 700 – 900 mm | 27.6" – 35.4"
360° camera (on request)	Radio with bluetooth and a hands-free kit	Electrical Hydraulic Oil Heating 230 V / 110 V	Narrow cab
Foldable front protective grid		Auxiliary heating	Trailer coupling
FOPS level II protective grid			Air-intake in steel-version
Hydraulic winch (Tractive force: 11 t | 24,251 lbs)			Cyclonic pre-separator for air intake

Subject to change in the course of technical development. The images shown are for illustration purposes only and may may contain optional extras.

Get in touch
Fast. Direct. Personal.
Scan the code to find your contact.

www.powerbully.com

KÄSSBOHRER GELÄNDEFAHRZEUG AG

TELEMET
Efficiency Through Simplicity™

Advice, spare parts and service

Telemet · Office in Chile

Los Canteros 8723, La Reina, Santiago 7880414, Chile

Phone +56 22 356 2735

info@telemet.com

telemet.com