From series 2025

NEW


Ready to

REMOVE

TECHNICAL SPECIFICATIONS

BeachTech 3000 Facelift



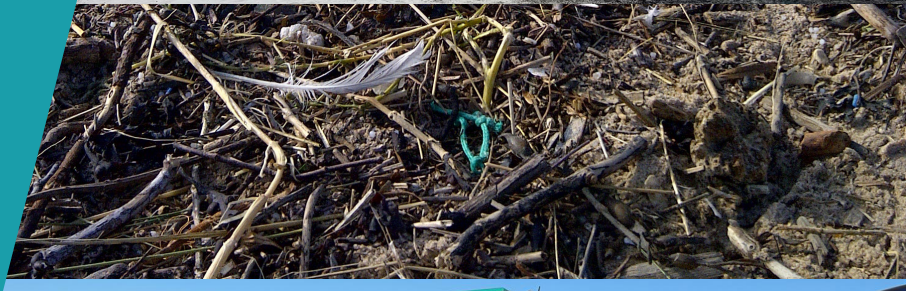



BeachTech®

BeachTech 3000 Facelift

Engine power tractor
74 kW (100 hp)

Working width
2.500 mm

Hopper volume
4,7 m^3 (total)

Area coverage
bis zu 30.000 m^2/h



Cleaning method	**patented raking-/ screening-/ mixed technique**	
Tractor requirements	**engine power min.****	74 kW (100 hp)
	four-wheel drive	
	differential lock	
	tires	500 mm front, 600 mm back
	coupling for drawbar eye Ø 40 mm, height adjustable to approx. 1 m height	
	PTO shaft	Z6, 1 3/8“
	power take-off, AR NORM	540 rpm (1000 rpm possible)
	power supply	standardized socket, 12 V
	drawbar load	1.600 kg
Dimensions	**vehicle lengths, in operation**	7.000 mm
	vehicle lengths, road transport	5.700 mm
	vehicle width, road transport	2.700 mm
	working width	2.500 mm
	vehicle height	2.400 mm
	vehicle height, road transport	3.950 mm
	Unloading height dump body	1.550 mm
Tires	**low pressure tires, wide (standard)**	500/60 – 22,5
Weight	**empty weight**	3.200 kg
	technically permissible total weight*	6.500 kg
Tank capacity	**hydraulic oil**	40 l
Performance	**area coverage up to****	30.000 m^2/h
Working depth	**working depth up to****	30 cm
Capacity	**collecting hopper**	0,7 m^3
	dump body	4,0 m^3
Speed	**operating speed max.****	12 km/h
	road traffic*	40 km/h

Subject to change in the course of technical development. The images shown are for illustration purposes only and may may contain optional extras.

Dealer stamp

* according to local traffic regulations
** depending on soil / beach conditions

Tel.: +49 7392 900 - 461
E-Mail: info@beach-tech.com
www.beach-tech.com

BeachTech®

TELEMET
Efficiency Through Simplicity™

Advice, spare parts and service

Telemet · Office in Chile

Los Canteros 8723, La Reina, Santiago 7880414, Chile

Phone +56 22 356 2735

info@telemet.com

telemet.com