
Combi track


1/2023 KGF







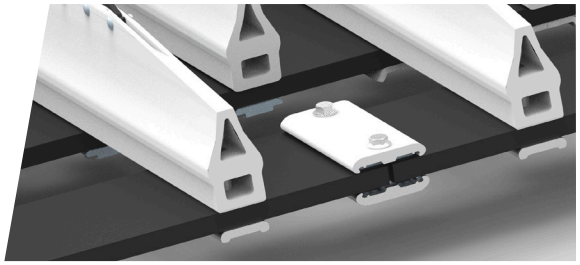

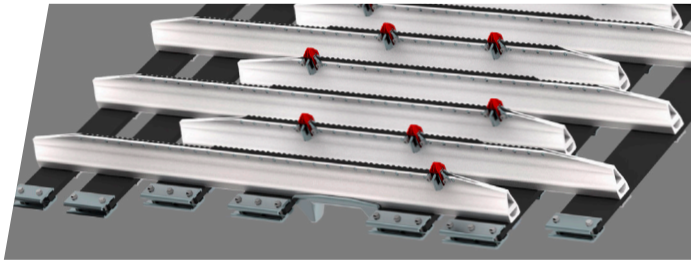

COMBI TRACK

The perfect combination of materials, with lightweight aluminium cleats and a heavy-duty steel edge results for optimum traction. These strong, extremely wearresistant track cleats are notable for high strength and optimum power transmission. The toothed steel edge and additional track elements make for optimum travel and climbing behavior on all snowcovered surfaces.

AREAS OF APPLICATION

The Combi tracks can be used everywhere, from "normal" terrain to steep slopes. Their toothed steel edge encounter no problems during dozing and preparation work, even on artificial snow or icy slopes. The toothed steel edge also provide effective protection against damage and wear caused by the soil when the vehicle is driven on thin layers of snow.

PistenBully®


Combi track

Vehicle type	Combi track	CombiPlus track	Performance Combi track	Overall width for track width (mm) 1,830	2,320	2,350	2,370	Weight* per chain set	Cleats pcs.	Cleat height	Cleat width	Distance of belts	Number of belts	Thickness of belts	Drive sprocket gear
PB 100 (822)	810 mm			2,480				760 kg	68	82.1 mm	40 mm	116.5 mm	3	10 mm	13
	970 mm			2,800				760 kg					4		
	1,130 mm			3,120				960 kg					5		
PB 400 (824)	1,648 mm					4,210		1,700 kg	75	108 mm	40 mm	116.5 mm	5		
PB 400 (827)		1,648 mm				4,210		2,140 kg	71	115 mm	40/45 mm	123.5 mm	6	15 mm	
PB 600 (828)		1,648 mm				4,210		2,180 kg	74	115 mm	40/45 mm	123.5 mm	6		14
		1,648 mm				4,210		2,020 kg	68	120 mm	45 mm	135 mm	7		13
PB 600 E+ (848)		1,648 mm				4,210		2,240 kg	76	115 mm	40/45 mm	123.5 mm	6		14
		1,648 mm				4,210		2,080 kg	69	120 mm	45 mm	135 mm	7		13
PB 800 (829)			1,648 mm				4,230	2,250 kg	74	120 mm	45 mm	135 mm	6		13


*according to ISO 1176/M6, Tara weights may vary depending on equipment.

www.pistenbully.com


6-belt track




7-belt track




PB 100 (822)

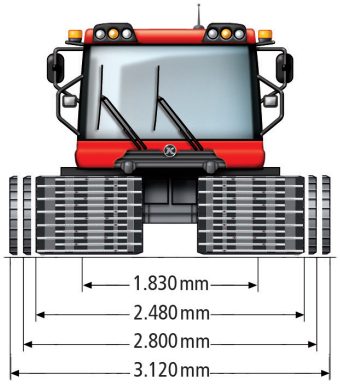


PB 400 (824)
PB 400 (827)



PB 600 (828)
PB 600 E+ (848)



PB 800 (829)



KÄSSBOHRER GELÄNDEFAHRZEUG AG

TELEMET
Efficiency Through Simplicity™

Advice, spare parts and service

Telemet · Office in Chile

Los Canteros 8723, La Reina, Santiago 7880414, Chile

Phone +56 22 356 2735

info@telemet.com

telemet.com