
from series 2024

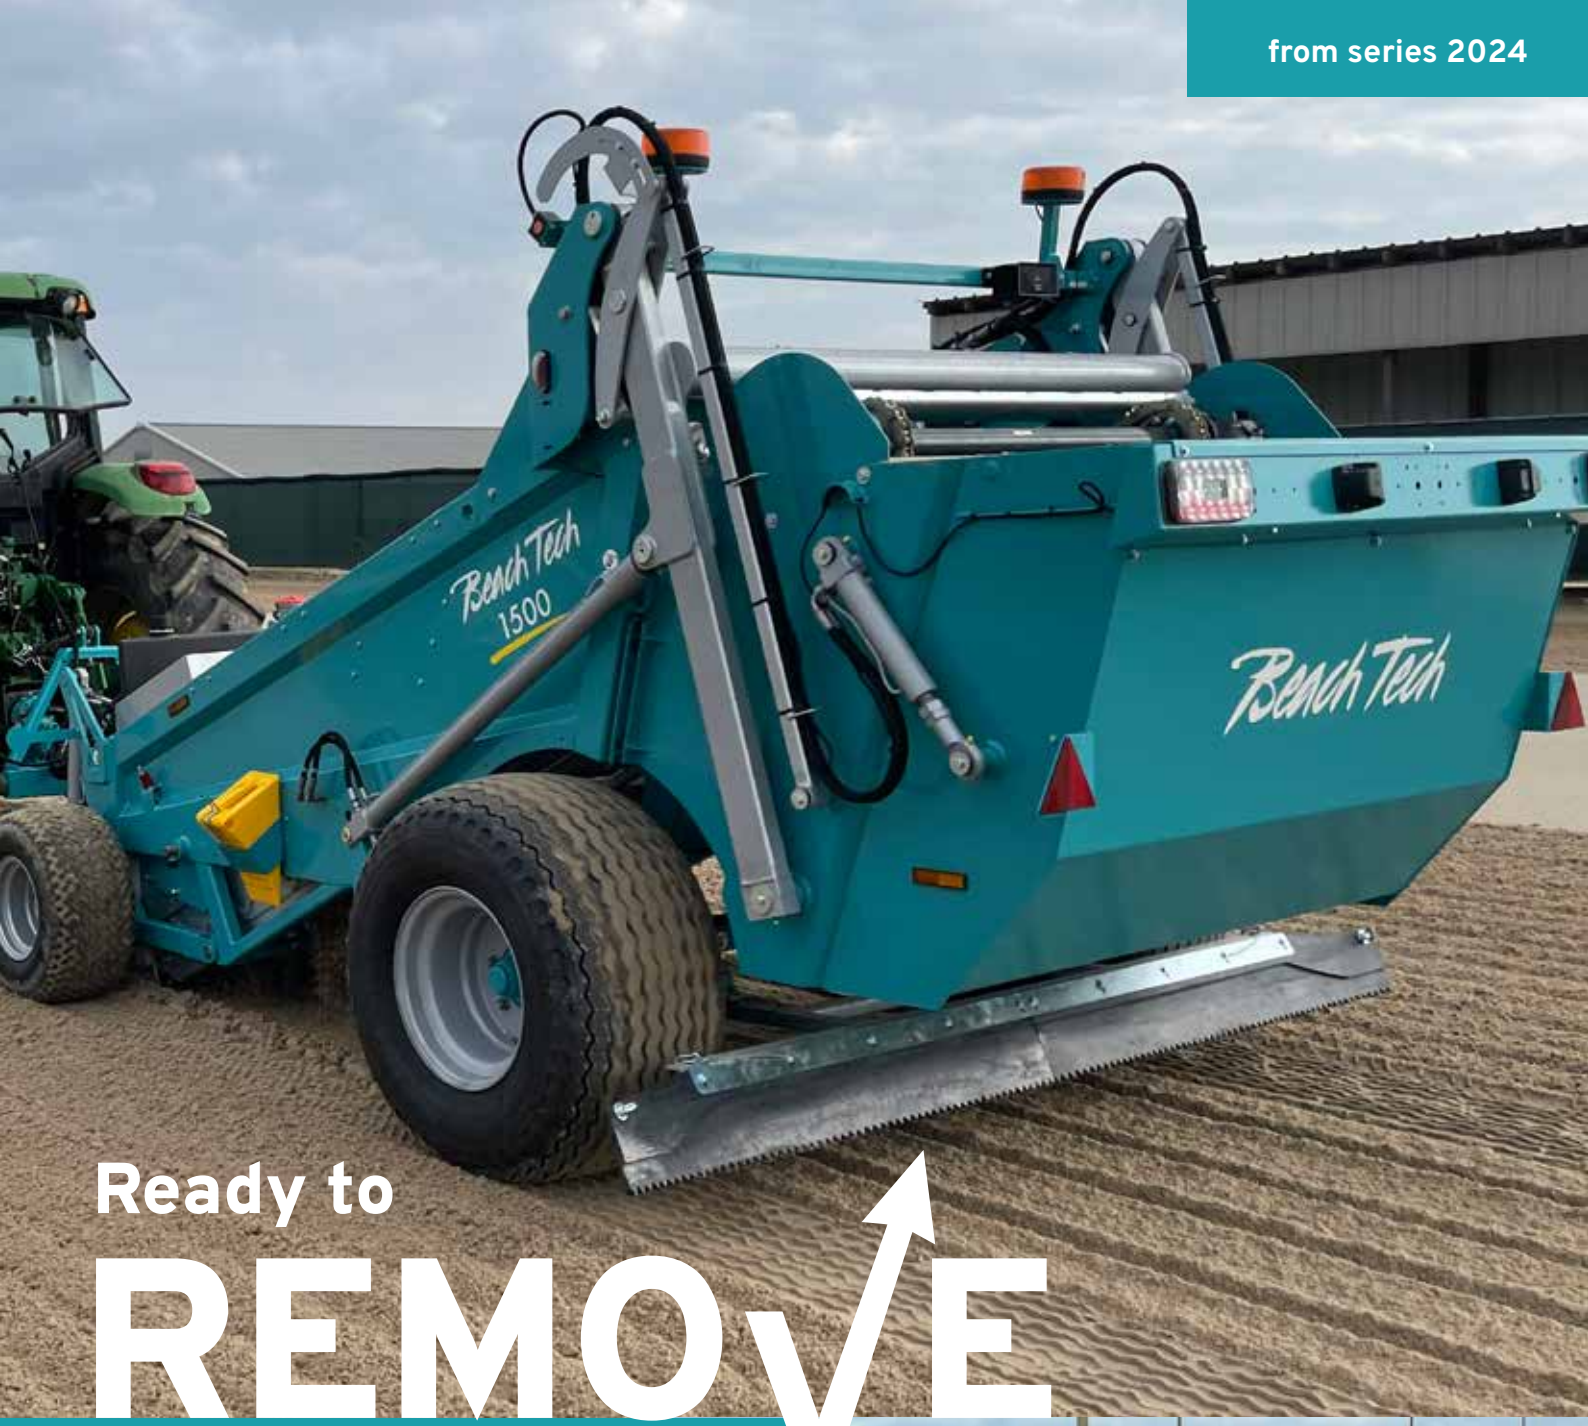

Ready to

REMOVE

TECHNICAL SPECIFICATIONS

BeachTech 1500







BeachTech®

BeachTech 1500

Engine power
from 55 kW | 70 hp

Working width
1.600 mm

Hopper volume
1,5 m³

Area coverage
up to 19.000 m²/h



Cleaning method	**Screening technique with vibrating screen and transport system**	
Tractor requirements	**Engine power min.****	55 kW (70 hp)
	Four-wheel drive	
	differantial lock	
	Tires	480 mm front, 520 mm back
	3-point hitch, cat. 2	
	PTO shaft	Z6, 1 3/8“
	power take-off, AR NORM	540 rpm
	power supply	standardized socket, 12 V
Dimensions	**vehicle length, road transport**	5.430 mm
	vehicle width, road transport	2.480 mm
	working width	1.600 mm
	vehicle height	2.430 mm
	Unloading height collecting hopper	0 – 2.600 mm
Tires	**low pressure tires, wide**	520/50 – 17
Weight	**Empty weight**	3.120 kg
	technically permissible total weight*	4.500 kg
Tank capacity	**hydraulic oil**	80 l
Performance	**area coverage up to****	19.000 m²/h
working depth	**working depth up to****	15 cm
Capacity	**collecting hopper**	1,5 m³
Speed	**operating speed max.****	12 km/h
	road traffic*	25 / 40 km/h

* according to local traffic regulations

** depending on soil / beach conditions

Subject to change in the course of technical development. The images shown are for illustration purposes only and may contain optional extras.

dealer stamp

BeachTech®
Tel.: +49 7392 900 - 461
E-Mail: info@beach-tech.com
www.beach-tech.com

TELEMET
Efficiency Through Simplicity™

Advice, spare parts and service

Telemet · Office in Chile

Los Canteros 8723, La Reina, Santiago 7880414, Chile

Phone +56 22 356 2735

info@telemet.com

telemet.com